WIRELESS ENGINEER

THE JOURNAL OF RADIO RESEARCH & PROGRESS

APRIL 1955

VOL. 32 No. 4 • THREE SHILLINGS AND SIXPENCE

AVO

WIDE RANGE
Signal
GENERATOR

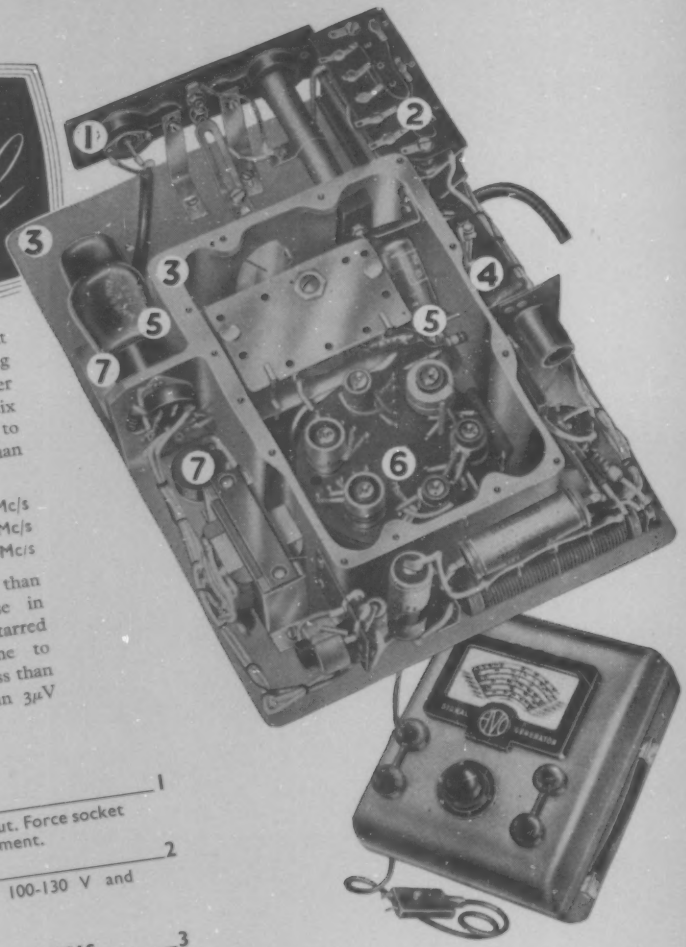

An inexpensive yet precision instrument designed specially to meet the exacting needs of the modern service engineer and laboratory technician. With six frequency ranges covering 50 Kc/s to 80 Mc/s, its accuracy is better than ±1% of the scale reading.

50 Kc/s-150 Kc/s	1·5 Mc/s-5·5 Mc/s
150 Kc/s-500 Kc/s	5·5 Mc/s-20 Mc/s
500 Kc/s-1·5 Mc/s	20 Mc/s-80 Mc/s

Scale sub-divisions provide more than adequate discrimination for use in television circuits. Note the starred features below, which combine to maintain a minimum signal of less than 1μV up to 20 Mc/s and less than 3μV between 20 Mc/s and 80 Mc/s.

★**OUTPUT** 1
Co-axial socket for attenuated output. Force socket located totally within H.F. compartment.

MAINS TRANSFORMER 2
Marked tagboard for inputs of 100-130 V and 200-260 V, A.C. 50/60 c/s.

★**CAST ALUMINIUM H.F. COMPARTMENT and CHASSIS** 3
Large number of fixing holes for H.F. compartment cover ensures excellent electrical bonding and good screening.

FUSE 4
Easily accessible when replacement is necessary.

VALVES 5
Standard types run at a rating to ensure long life.

TURRET COIL SWITCHING 6
Standard "AVO" practice.

★**ATTENUATOR SYSTEM** 7
Employs close tolerance, high stability midget carbon resistors, low reactance rotary potentiometer modified for H.F. operation with carefully designed screening.

Other features include:

ILLUMINATED SPOT RANGE SELECTOR
Gives rapid identification of operational band with intensified lighting round precise frequency. Fine hair line gives close discrimination, particularly on high frequencies.

STOPS
Separate stops prevent turning of dial with respect to condenser.

★**MAINS FILTER SYSTEM**
This is screened from main electrical assembly.

BUSHING PLATES
provide additional rigidity for rotary controls.

SLOW MOTION DRIVE
Substantially free from backlash.

MAINS MODEL 100-130 V and 200-260 V, A.C., 50-60 c/s
OR BATTERY MODEL.....£30

Sole Proprietors and Manufacturers:—

The AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT CO. LTD.
WINDER HOUSE • DOUGLAS STREET • LONDON • S.W.1 *Telephone: VICTORIA 3404/9*

S.G.2.

A NEW-PRINCIPLE A-C AUTOMATIC VOLTAGE STABILISER

We have now had released to us by a Government Department the design of our "A.C. Mains Regulator, Automatic, Step, Mark II", and are therefore manufacturing this unit for general sale. It ideally fills the need for a cheap, small and light Stabiliser. Although it measures only 8½in. x 4½in. x 5in., weighs as little as 11 lbs., and costs only £24 net, it has a performance fully equal to any similarly rated Automatic Stabiliser of the resonated, saturated core type, without any of the disadvantages.

ASR-1150 has a pure output waveform, is unaffected by changes in mains frequency, and works equally well from no-load to full load, which is 1150 VA. It has a stabilised output at 230V unless otherwise ordered.

Many other Automatic Voltage Stabilisers are now manufactured by us, and all are available for immediate delivery. In some cases the constancy of output is as high as 0.15%. Models are available from 200 VA to 30 kVA, single phase. 3-Phase Stabilisers are also available. Prices are *extremely* competitive.

We can supply from stock all types of American tubes, condensers, valves, potentiometers, etc.

MEMO: If you are interested in infinitely-variable Transformers, do not forget the almost indispensable "VARIAC" (Reg'd. Trademark). Models are available from 170VA to 21kVA. Our Catalogue V-549 (3rd Edition) tells the whole story and will gladly be mailed free and post free, on request.

The *NEW "ASR-1150"* costs only *£24* net

Complete information is obtainable from:

CLAUDE LYONS LTD., STABILISER DIVISION,
HEAD OFFICES & WORKS: 76 OLDHALL STREET, LIVERPOOL 3, LANCS.
SOUTHERN FACTORY: VALLEY WORKS, WARE ROAD, HODDESDON, HERTS.
(A10 main London/Cambridge Road, at Junction of A602)

for radio ceramics

STEATITE & PORCELAIN PRODUCTS LTD.

Stourport-on-Severn, Worcestershire. Telephone : Stourport 111. Telegrams : Steatain, Stourport

SP88

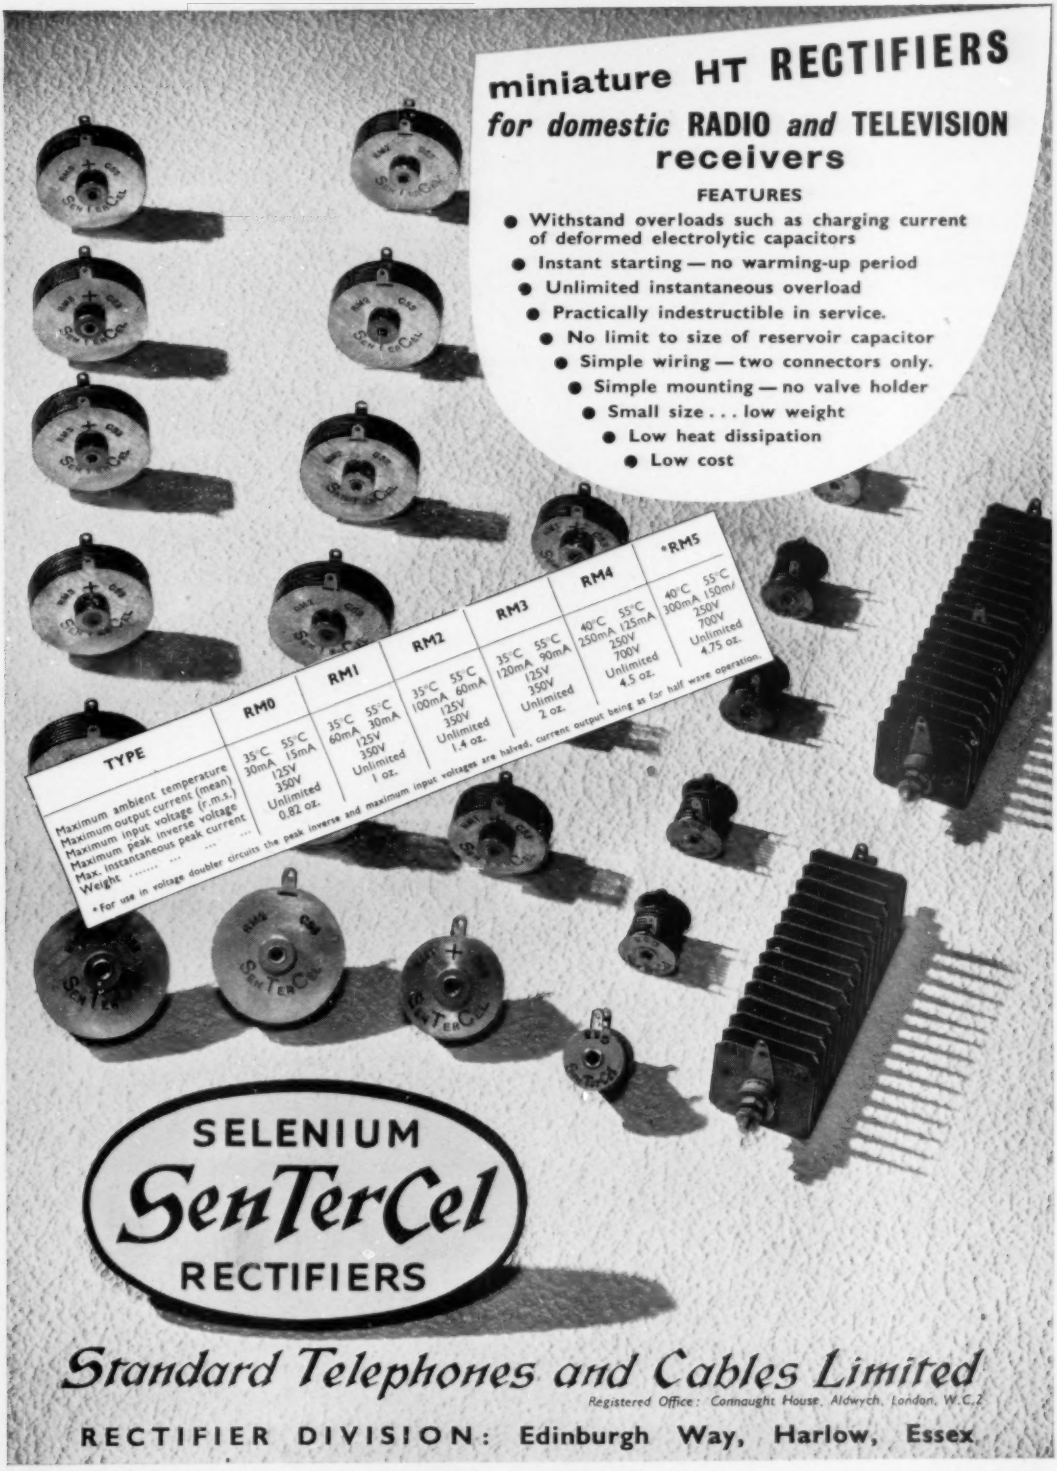
miniature HT RECTIFIERS
for domestic RADIO and TELEVISION receivers
FEATURES
Withstand overloads such as charging current of deformed electrolytic capacitors
Instant starting — no warming-up period
Unlimited instantaneous overload
Practically indestructible in service.
No limit to size of reservoir capacitor
Simple wiring — two connectors only.
Simple mounting — no valve holder
Small size . . . low weight
Low heat dissipation
Low cost
TYPE
RM0
RM1
RM2
RM3
RM4
*RM5
Maximum ambient temperature
Maximum output current (r.m.s.)
Maximum input voltage (r.m.s.)
Maximum peak inverse voltage
Max. instantaneous peak current
Weight
35°C 55°C
30mA 15mA
125V
350V
Unlimited
0.82 oz.
35°C 55°C
60mA 30mA
125V
350V
Unlimited
1 oz.
35°C 55°C
100mA 60mA
125V
350V
Unlimited
1.4 oz.
35°C 55°C
120mA 90mA
125V
350V
Unlimited
2 oz.
40°C 55°C
250mA 125mA
250V
700V
Unlimited
4.5 oz.
40°C 55°C
300mA 150m/
250V
700V
Unlimited
4.75 oz.
* For use in voltage doubler circuits the peak inverse and maximum input voltages are halved, current output being as for half wave operation.
SELENIUM
SenTerCel
RECTIFIERS
Standard Telephones and Cables Limited
Registered Office: Connaught House, Aldwych, London, W.C.2
RECTIFIER DIVISION: Edinburgh Way, Harlow, Essex.

Ferranti Valves for Radio and Television

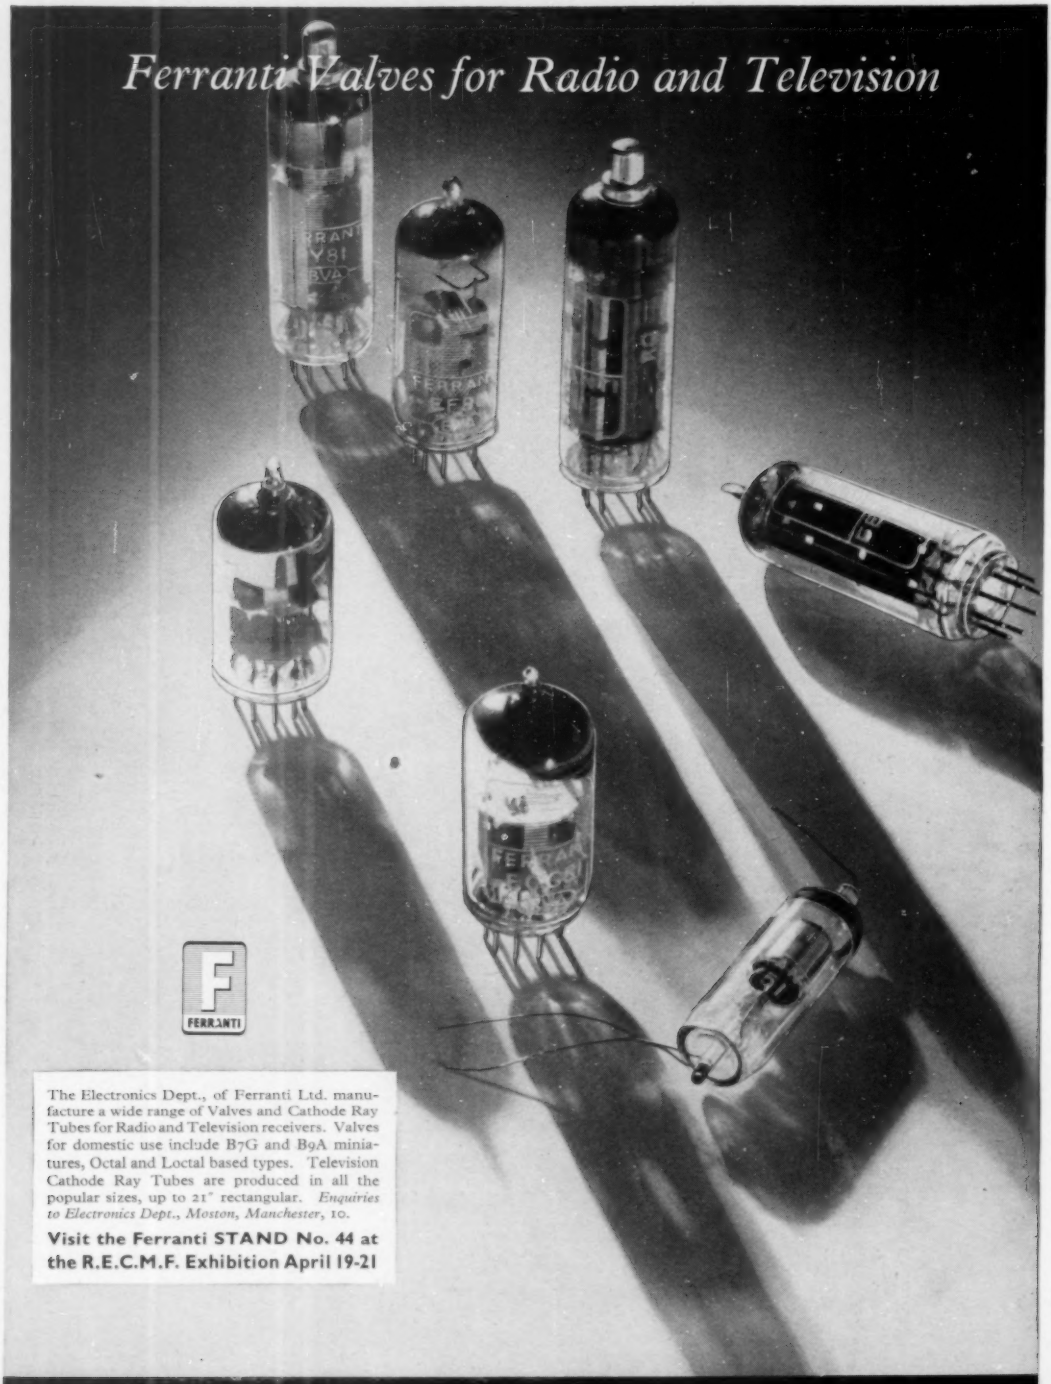

The Electronics Dept., of Ferranti Ltd. manufacture a wide range of Valves and Cathode Ray Tubes for Radio and Television receivers. Valves for domestic use include B7G and B9A miniatures, Octal and Loctal based types. Television Cathode Ray Tubes are produced in all the popular sizes, up to 21" rectangular. *Enquiries to Electronics Dept., Moston, Manchester, 10.*

Visit the Ferranti STAND No. 44 at the R.E.C.M.F. Exhibition April 19-21

FERRANTI LTD · FIELDS NEW ROAD · CHADDERTON · OLDHAM

London Office : KERN HOUSE, 36 KINGSWAY, W.C.2

Vital to good Electronics

F.E.C.
SILVERED CERAMIC CONDENSERS

Temperature Compensating Ceramic Tubular Condensers. Positive 100. Negative 750.

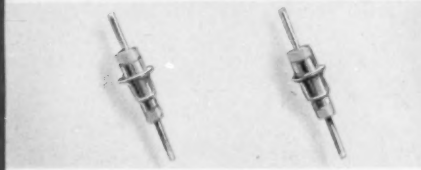

Feed-through Ceramic Condensers

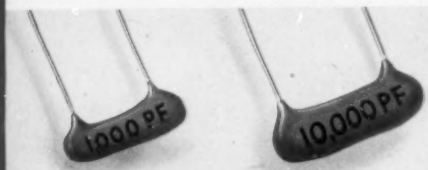

Ceramic High-K Tubular Condensers
200 PF. to ·01 mfd.

Ceramic High-K Disc Condensers
500 PF. to ·01 mfd.

L.E.M.
SILVERED MICA CONDENSERS

Silvered Mica Condensers
Up to 10 kv. Test.

Catacon Moulded Silvered Mica Condensers
to R.C.S. 132. H1.

Filter Type Silvered Mica Condensers
·01 mfd. to 2 mfd.

Sub-Miniature Silvered Mica Condensers
Type 1106 – 10 PF. to 1,500 PF.

Agents in every part of the World

LONDON ELECTRICAL MANUFACTURING CO. LTD.
BEAVOR LANE • HAMMERSMITH • LONDON W.6
Telephone : Riverside 4824
Cable : "Condenser London"

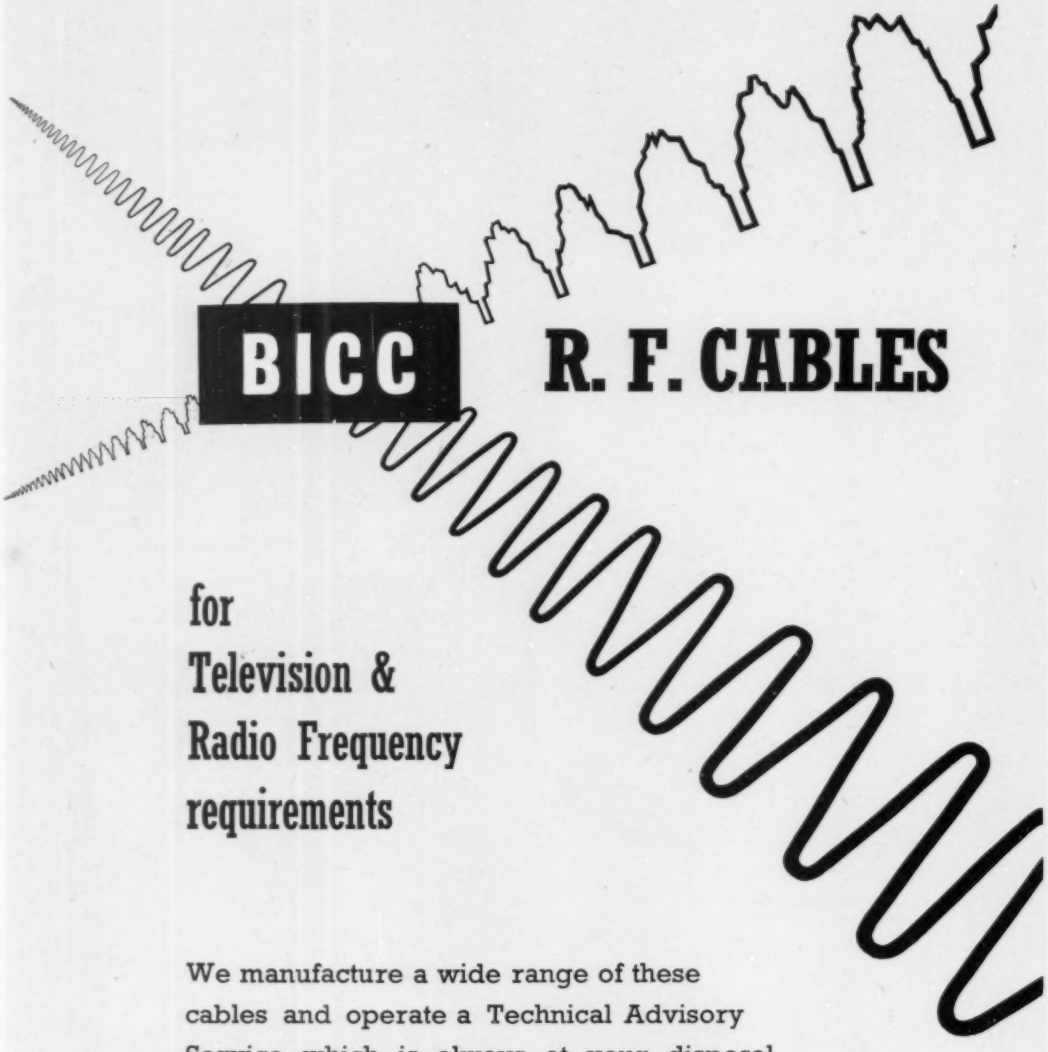

BICC R. F. CABLES

for
Television &
Radio Frequency
requirements

We manufacture a wide range of these cables and operate a Technical Advisory Service which is always at your disposal

BI Callender's

BRITISH INSULATED CALLENDER'S CABLES LIMITED
21 BLOOMSBURY STREET, LONDON, W.C.1

HIGH-STABILITY
Magnetic Amplifiers

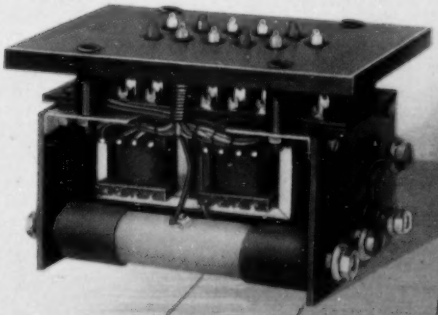

SINGLE-STAGE OR PUSH-PULL

An extensive range of standard types always available for prompt delivery

SPECIAL TYPES DESIGNED TO SUIT *YOUR* NEEDS

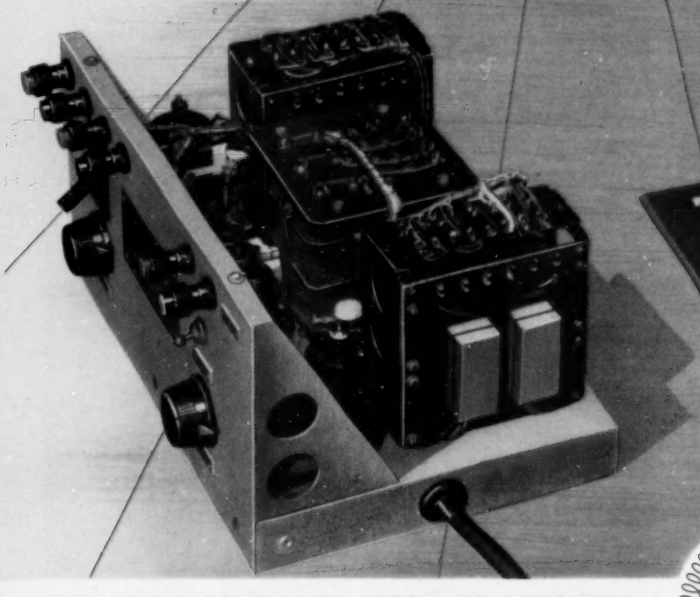

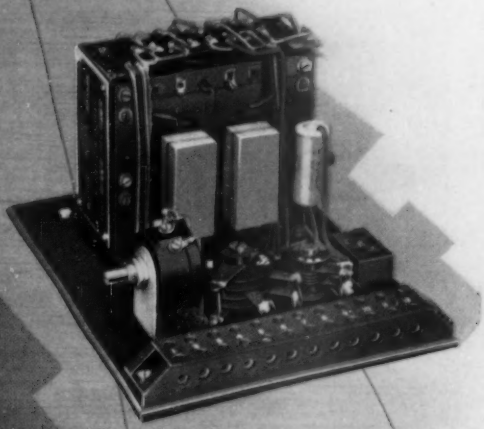

THE WORLD-RENOWNED SPECIALIST DESIGNERS AND MANUFACTURERS OF MAGNETIC AMPLIFIERS

ELECTRO METHODS LTD OF STEVENAGE

Now FREE to all!

THE E-M TECHNICAL ADVISORY SERVICE

Regardless of whether your magnetic amplifier problem is simple or complex, the fact remains that the only reliable solution is that which entirely eliminates risk.

We therefore respectfully invite you to avail yourself of the wide resources of technical knowledge and practical experience possessed by the specialist technicians of our Magnetic Amplifier Division

Full technical data and illustrated leaflets promptly forwarded on request!

ELECTRO METHODS LTD., 22-46 CAXTON WAY, STEVENAGE, HERTS · Phone: STEVENAGE 780

Two leading suppliers of engineered rubber under one roof

EMPIRE RUBBER COMPANY

RUBBER BONDERS LIMITED

When it is a question of sealing . . . sealing doors, sliding roofs, lids . . . sealing cars, coaches, ships, aeroplanes . . . sealing to make things watertight, airtight, and everything-else-tight . . . the name to remember is EMPIRE RUBBER COMPANY. Examples illustrated here are typical of the Spandit range of solid skinned sponge rubber sections, available in every useful shape and size imaginable.

This a FLEXILANT SHAFT COUPLING which transmits torque from one shaft to another through rubber in shear. Such couplings accommodate misalignment and reduce vibration —two of the chief functions of the rubber-bonded-to-metal parts which RUBBER BONDERS LIMITED manufacture in great variety, to all specifications. Another example of the many ways in which RUBBER BONDERS LIMITED help machinery run more smoothly—and more economically.

EMPIRE RUBBER COMPANY AND RUBBER BONDERS LIMITED DUNSTABLE

R.B. 90

Valves for Industry

R.F. Heating

The increasing use of R.F. Heating in industry has shown the need for units to provide outputs between 10 and 50 kW

To meet this demand, the English Electric Valve Company have developed two new valves for R.F. generators of 10 kW and upwards. These new products are not modifications of valves used for communications, but are designed expressly for operation under the less favourable conditions imposed by factory use. They are rugged and will withstand severe overloads; they are low in first cost and have a long service life. Both types are available in air-cooled or water-cooled versions and a suitable range of rectifying valves for use in conjunction with them is also available.

Valves for Industry

is the title of a new publication giving full details of these valves, which is available on request.

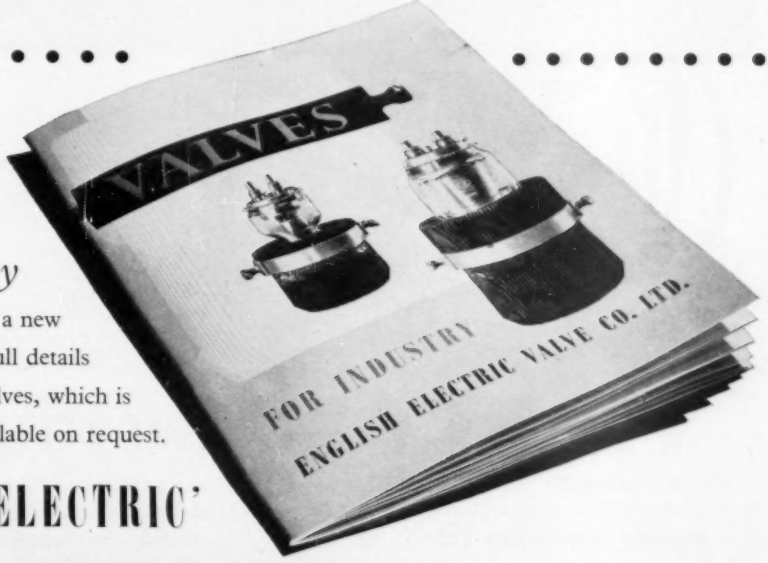

'ENGLISH ELECTRIC'

ENGLISH ELECTRIC VALVE CO. LTD.

Waterhouse Lane, Chelmsford
Telephone: Chelmsford 3491

New MARCONI Vacuum Tube Voltmeter

TYPE TF 1041

FREQUENCY RANGE

20 c/s to 700 Mc/s

AND D.C.

This together with other new designs for 1955, may be inspected on stand no. 103, 19th to 21st April, at the R.E.C.M.F. Exhibition and on stand no. 89, 25th to 28th April, at the Physical Society Exhibition.

MARCONI INSTRUMENTS

SIGNAL GENERATORS · BRIDGES · VALVE VOLTMETERS · Q METERS · WAVEMETERS
FREQUENCY STANDARDS · WAVE ANALYSERS · BEAT FREQUENCY OSCILLATORS

MARCONI INSTRUMENTS LTD · ST. ALBANS · HERTS · Telephone: ST. ALBANS 6160/9

30 Albion Street, Kingston-upon-Hull. Phone: Hull Central 16144. 19 The Parade, Leamington Spa. Phone: 1408

Managing Agents in Export:

MARCONI'S WIRELESS TELEGRAPH CO. LTD · MARCONI HOUSE · STRAND · LONDON, W.C.2

TC 60

FERRANTI

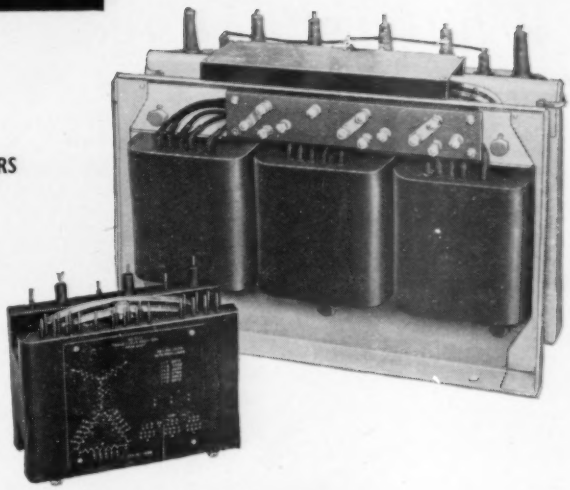

THREE PHASE RESIN CAST TRANSFORMERS

The 'Pentland' Series of Resin Cast Components has been extended to include Three Phase Transformers with ratings up to approximately 4 kVA at 50 c.p.s. Correspondingly greater ratings are available at the higher frequencies.

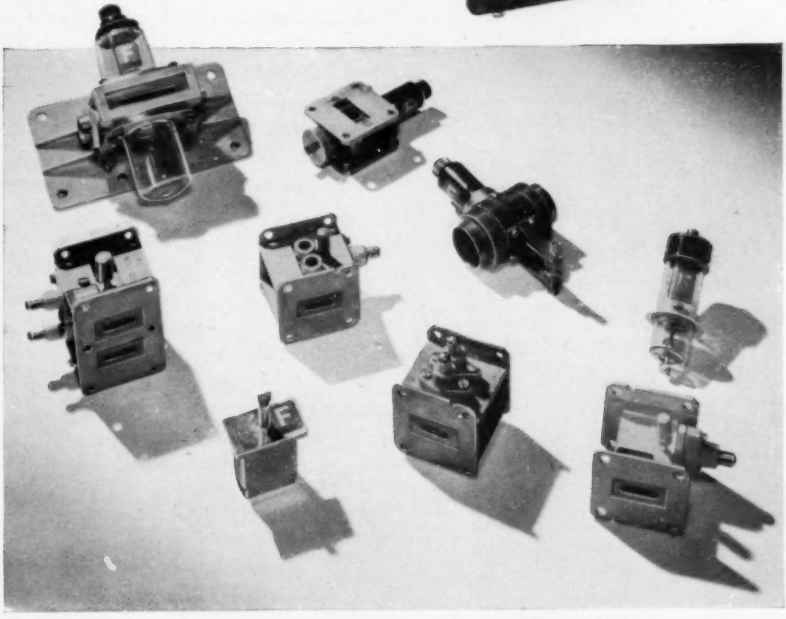

T.R. and A.T.R. CELLS FOR RADAR EQUIPMENTS

The Ferranti ranges of T.R. and A.T.R. Cells cover the 3 cm., 10 cm., and 30 cm. bands. Tunable and Broad Band types are available and a number of American equivalents are manufactured.

Visit the Ferranti **STAND No. 44** at the R. E. C. M. F. Exhibition 19—21 April

FERRANTI LTD., CREWE TOLL, FERRY ROAD, EDINBURGH 5

London Office: KERN HOUSE, 36 KINGSWAY, W.C.2.

ES/T15

Whatever the recorder

Choose—

A NEW

LOW COST, HIGH QUALITY

MAGNETIC RECORDING PAPER BASED TAPE

- LET THIS NEW TAPE SPEAK FOR ITSELF
- MANUFACTURED BY ONE OF THE COUNTRY'S LEADING POWDER METALLURGICAL LABORATORIES
- MIRROR SMOOTH FINISH TO REDUCE FRICTION AND WEAR ON HEADS
- EMBODYING QUALITIES FOUND IN THE MORE EXPENSIVE TAPES
- 7" DIA. IMPROVED UNIVERSAL SPOOL CONTAINING 1200 FEET

RETAIL PRICE £1 *WITH FULL TRADE DISCOUNT*

Enquiries to:

SALFORD ELECTRICAL INSTRUMENTS LTD.

PEEL WORKS • SILK STREET • SALFORD 3 • LANCS

LONDON OFFICE : MAGNET HOUSE • KINGSWAY • WC2 *Tel: Temple Bar 4669*

A Subsidiary of THE GENERAL ELECTRIC COMPANY LTD. OF ENGLAND

Plessey

MARK 4 **MINIATURE CONNECTORS**

. . . the most flexible system of interconnection yet devised

Compact, miniature Plugs and Sockets of Plessey manufacture enabling multiple connections of great complexity to be made rapidly and without fear of error, have revolutionised the design of electrical and electronic equipment of all types.

Furthermore, they make possible prefabrication of complete wiring systems on the factory bench, with a consequent saving in production time.

Rapid disconnection for servicing of equipment units, high electrical and mechanical efficiency and the absolute flexibility of the system are other outstanding advantages.

The Mark 4 range is available both in aluminium (single hole fixing) and brass (single hole *or* flange fixing).

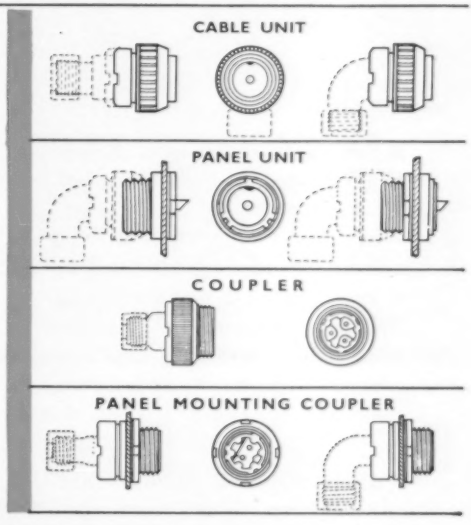

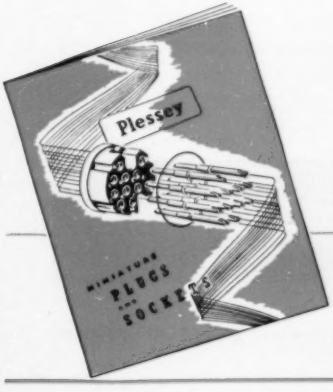

These are the advantages . . .

Weather and Pressure Proof • Adaptable, Foolproof Unit Connection • Reliable Low-Resistance Contact • Quick Disengagement for Routine Testing • Allow Considerable Prefabrication of Wiring Forms • Numerous Pin Combinations • Robust and Durable • Eliminate Risk of Connection Errors after Servicing •

The Mk4 range of **Plessey** Plugs and Sockets is described fully in PUBLICATION No. 674 . . . See that your Design Engineers have a copy

THE PLESSEY COMPANY LIMITED · ILFORD ESSEX

PBIa

Cast in ARALDITE

This component is a part of the 'Agglometron'* oil treatment chamber. It was cast in 'Araldite' because :—

* An outstanding electrical insulator was needed
* It had also to be oil-resistant
* It was important that it should lend itself readily to casting and machining.

'Araldite' as a casting and as a bonding resin is used in many components of the 'Agglometron'. Its electrical and mechanical properties, its exceptional adhesion to metals and ceramics, its resistance to high temperatures, humidity and corrosive agents suggest other uses in which the execution of new designs can be made practicable and the production of electrical components greatly simplified. May we send you full descriptive literature ?

* An electrical device developed by Mr. O. E. Nekolla of Messrs. Menrow Ltd. (a subsidiary company of J. & E. Arnfield Ltd.) for agglomerating impurity particles in circulating oil to facilitate filtering. The name 'Agglometron' is a registered trade mark for the high voltage treatment chamber included in the filtration plant and is covered by B.P. 698,900.

THESE ARE THE NEW EPOXIES!

'Araldite' (regd.) epoxy resins are obtainable in the following forms :—

- Hot and cold setting adhesives for metals and most other materials in common use.
- Casting Resins for the electrical, mechanical and chemical engineering industries.
- Surface Coating Resins for the paint industry and for the protection of metal surfaces.

'Araldite'

'Araldite' is a Registered Trade Name

epoxy casting resins

Aero Research Limited, *DUXFORD, CAMBRIDGE. Telephone : Sawston 187. A Ciba Company*

VISIT US ON STAND NO. 99 AT THE R.E.C.M.F. EXHIBITION

AP264-105

Consistency of Performance

Just one of a bunch...

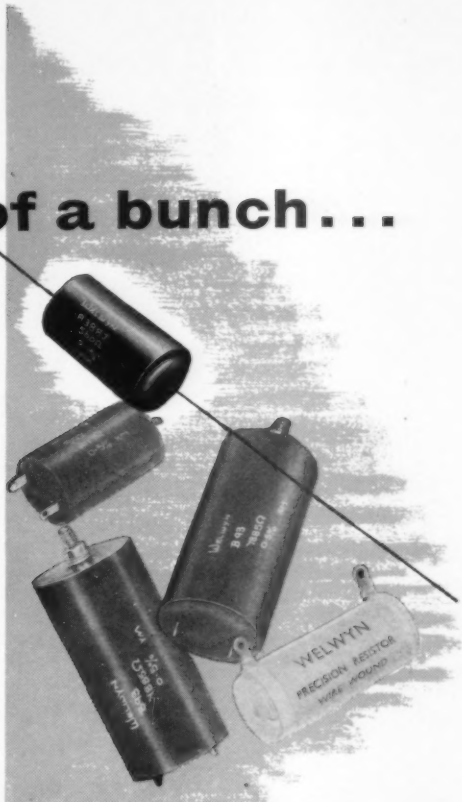

WE test our precision resistors on a sampling basis. Here's the performance of one little fellow, taken at random from a batch and loaded at its full rated power for close on 1,000 hours. You'll see from the chart how it stood up to the treatment: *a total excursion of* 0.036% and an absolute change of only 0.01%.

...and they're all much alike!

Even our miniature precision resistors are guaranteed a standard tolerance of 0.1%.

Welwyn Precision Wirewound Resistors for

LONG TERM STABILITY · FREEDOM FROM NOISE · FINE PERFORMANCE IN TROPICAL CONDITIONS

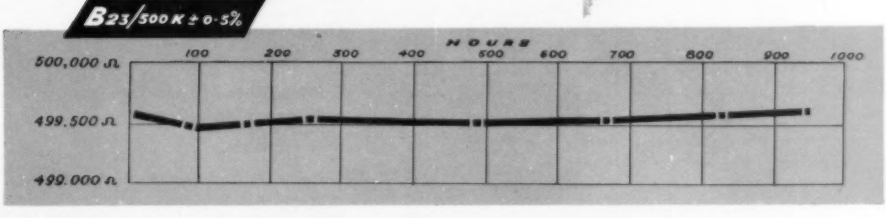

MANUFACTURERS OF
WELWYN
ELECTRICAL
COMPONENTS

Products include:

- Toroidally Wound Power Potentiometers
- Panclimatic High Stability Carbon Resistors
- Vitreous Enamelled Wirewound Resistors
- Carbon Composition and Wirewound Potentiometers
- Insulated High Stability Carbon Resistors
- High Voltage Composition Resistors

WELWYN ELECTRICAL LABORATORIES LTD · BEDLINGTON · NORTHUMBERLAND

On Admiralty, Ministry of Supply, (A.I.D. Approved) and Post Office Lists



High Q inductance coils

wound on Ferroxcube cores

DESIGNERS of compact and efficient tuned circuits and wave filters are making ever-increasing use of Mullard high Q inductance coils.

Based on Ferroxcube, the world's most advanced magnetic core material, these coils combine small size with an inductance of up to 30 henries over a wide frequency range. Furthermore, their convenient shape and self screening properties facilitate either individual mounting or stacking.

Full details of these and other high grade components now available from Mullard will be gladly supplied on request.

TYPICAL Q VALUES

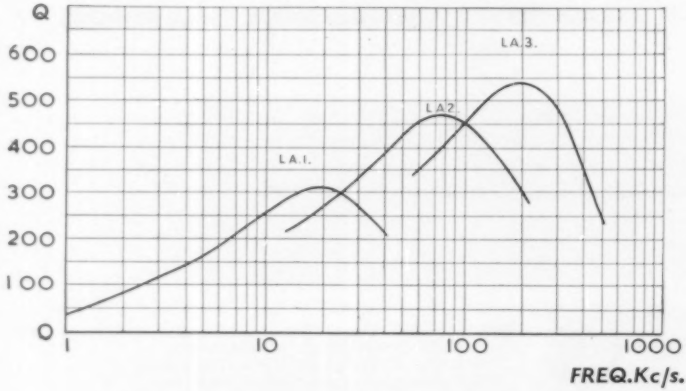

Special Features

Small size

Low hysteresis loss factor

High value of inductance

Low self capacitance

Controllable air gap facilitating inductance adjustment

Self screening

Controlled temperature coefficient

Operation over a wide frequency range

Easily mounted

Mullard

'Ticonal' permanent magnets,
'Magnadur' ceramic magnets,
Ferroxcube magnetic cores.

MULLARD LIMITED COMPONENT DIVISION · CENTURY HOUSE SHAFTESBURY AVENUE . LONDON · W.C.2
(MM1450)

WIRELESS ENGINEER

The Journal of Radio Research and Progress

ESTABLISHED 1923

Managing Editor: HUGH S. POCOCK, M.I.E.E.

Editor: W. T. COCKING, M.I.E.E. Technical Editor: Professor G. W. O. HOWE, D.Sc., LL.D., M.I.E.E.

Editorial Advisory Board:

Professor E. B. MOULLIN, Sc.D., M.I.E.E.; A. H. MUMFORD, O.B.E., B.Sc.(Eng.), M.I.E.E. (G.P.O. Engineering Department); A. R. A. RENDALL, Ph.D., B.Sc., M.I.E.E. (British Broadcasting Corporation); R.L. SMITH-ROSE, C.B.E., D.Sc., Ph.D., M.I.E.E. (Department of Scientific and Industrial Research)

Volume 32 · Number 4

CONTENTS

APRIL 1955

Editorial: Decibel and Decilog **91**

Discriminator Circuit Analysis
by F. L. Morris, B.Sc. **93**

Visual Impedance-Matching Equipment
by R. Dalziel, M.A. and A. Challands **99**

Series Resonant Circuit Theory
by A. J. Lyon, M.A. **107**

Low-Frequency Direction Finder
by C. Clarke and V. A. W. Harrison **109**

Correspondence **114**

New Books **116**

Standard-Frequency Transmissions **118**

Abstracts and References. Nos. 904-1226 .. .. **A.73-A.98**

Published on the fifth of each month

Annual Subscription: Home and overseas £2 7s. 0d; Canada and U.S.A. $7.50
(*Including Annual Index to Abstracts and References*)

Editorial, Advertising and Publishing Offices: Dorset House, Stamford Street, London, S.E.1

Telephone: Waterloo 3333 (60 *lines*) · *Telegrams: Wirenger, Sedist, London*

BRANCH OFFICES AT BIRMINGHAM · MANCHESTER AND GLASGOW

FOR AIR, LAND AND SEA U.H.F. STATIONS

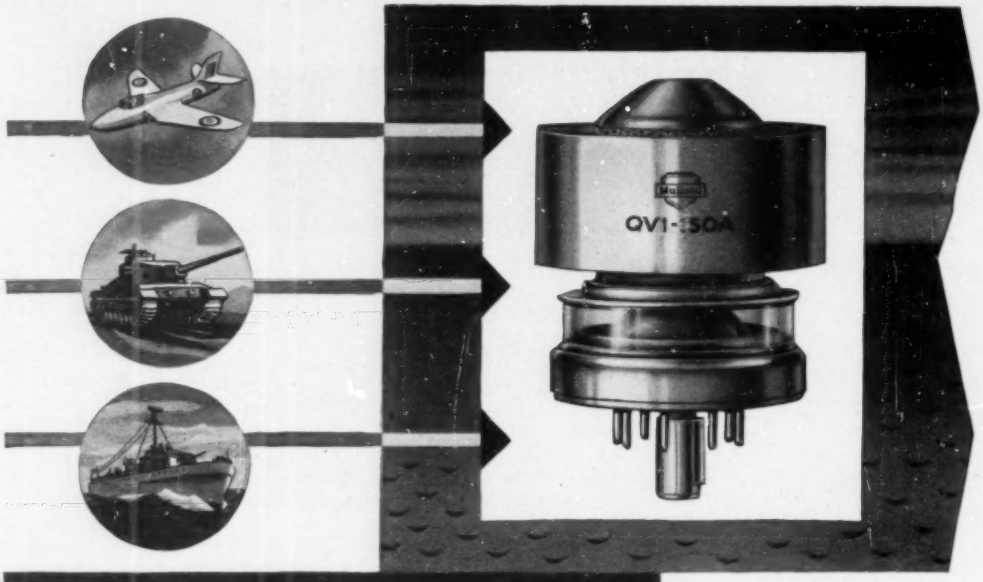

QV1-150A POWER TETRODE

The new Mullard QV1-150A is an external anode tetrode of exceptionally small dimensions, completely interchangeable with the popular American 4X-150A. It is forced-air cooled and will operate with excellent efficiency and power gain at frequencies as high as 500 Mc/s.

Although the maximum d.c. anode voltage is 1.25kV, the performance of the QV1-150A is little reduced at half this figure and recommends it for both fixed and high power mobile transmitting equipments.

High permissible anode dissipation, high current density and very favourable ratio of mutual conductance to capacitance particularly suit this new tetrode for wide-band applications.

The modified loctal base of the QV1-150A is so arranged that, when equipped with its special socket, forced-air cooling is facilitated and coaxial or linear circuits may be used. Excellent circuit separation is achieved at U.H.F. by a disc-seal screen-grid connection located between anode and base which is by-passed to cathode by a capacitor built into the socket.

Further information on this and a wide range of other transmitting valves may be readily obtained from the address below.

Typical Applications	Va (kV)	Pload (W)	f(Mc/s)
R.F. POWER AMPLIFIER			
Class "B" (Television Service)	1.25	200	216
Class "C" Telegraphy and F.M. Telephony	1.25 1.25	156 112	165 500
Class "C" Anode Modulated	1.0	112	165
A.F. POWER AMPLIFIER AND MODULATOR (two valves)			
Class "AB1"	1.25	310	A.F.
Class "AB2"	1.25	425	A.F.

HEATER		LIMITING VALUES			BASE
Vh	6.0V	Va max.	1.25	kV	B8F
Ih	2.6A	pa max.	150	W	
		Vg2 max.	400	V	
		pg2 max.	12	W	
		f max.	500	Mc/s	

Mullard

MULLARD LTD., COMMUNICATIONS & INDUSTRIAL VALVE DEPT. CENTURY HOUSE, SHAFTESBURY AVENUE W.C.

MVT 162

WIRELESS ENGINEER

Vol. 32 APRIL 1955 No. 4

Decibel and Decilog

AS everyone knows, the decibel is based upon a power ratio, the number of decibels being precisely defined as ten times the common logarithm of the ratio of two powers. It has proved so useful that it has found application outside the field of engineering and is being applied where the quantities involved bear no relation whatever to power. In a paper[1] advocating a new unit, the decilog, the author states that the decibel is now being employed even for such things as ratios of values of length, frequency and impedance!

This might not be very important in itself but some people are using ten times the logarithm and some are using twenty times; sometimes apparently at random, sometimes according to whether they imagine the quantities are related to power or voltage (or current). This is a serious misuse of the decibel and, as we have already mentioned, there is accordingly a move on foot to define a new unit for those cases where the decibel is inappropriate. Many names have been suggested for it, but the one which seems likely to find most favour is the decilog; this unit is so defined that the number of decilogs is ten times the logarithm of the ratio of two quantities.

If these quantities are powers, therefore, the decilog is identical with the decibel. If they are voltages, however, a given ratio represents twice as many decibels as it does decilogs. This raises a matter of importance. Complaints are often made about incorrect usage of the decibel when voltage or current ratios are involved and it might appear advantageous to abandon the decibel in such cases and adopt the decilog instead.

If we have two powers $P_1 = E_1^2/R_1 = I_1^2R_1$ and $P_2 = E_2^2/R_2 = I_2^2R_2$ then, from the definition of the decibel, the number N of decibels corresponding to the power ratio P_1/P_2 is

$$N = 10 \log (P_1/P_2) \quad .. \quad .. \quad .. \quad (1)$$

$$= 10 \log \frac{E_1^2}{R_1} \cdot \frac{R_2}{E_2^2} = 20 \log \frac{E_1}{E_2} - 10 \log \frac{R_1}{R_2}$$

$$= 10 \log \frac{I_1^2R_1}{I_2^2R_2} \quad = 20 \log \frac{I_1}{I_2} + 10 \log \frac{R_1}{R_2}$$

When, and only when, $R_1 = R_2$

$$N = 20 \log (E_1/E_2) = 20 \log (I_1/I_2) \quad .. \quad (2)$$

In practice, the relations (2) are very commonly used without any regard to the proviso that the resistances must be equal. An amplifying stage of substantially infinite input impedance and moderate output impedance may develop across its output load A times the voltage that is applied to its input. It is usually said to have a gain of 20 log A decibels.

As expressed above, this usage seems indefensible, and it might seem that this is a case where the decibel should be replaced by the decilog, that we should call the gain 10 log A decilogs.

Let us, however, look at the question of amplifier gain from a different point of view. A multi-stage amplifier normally consists of a succession of valve stages, each having a very high input impedance and moderate output impedance, so that the output of any stage is not appreciably affected by the connection of the next. When

[1] "The Decilog," by E. I. Green, *Electrical Engineering*, July 1954 Vol. 73, p. 597.

such an amplifier is driven with a certain input, its output stage will have V volts applied to it and develop P watts in its resistive output load. If an extra stage of voltage amplification A is inserted in the amplifier without changing anything else, the output stage will have AV volts on its grid and it will develop A^2P watts in the same output load.

The inclusion of the extra stage has thus resulted in the output power rising by A^2 times and, as the value of resistance in which it is developed is unchanged, equations (2) are correct and the increase of power is certainly 20 log A decibels.

Looked at from this point of view, it is perfectly correct to express voltage amplification in decibels using equations (2) and, therefore, it would be quite wrong to use the decilog for it.

Much the same sort of thing occurs when one expresses the frequency response of an amplifier in terms of decibels. To take a simple example, suppose some source supplies a current I, independent of frequency, to a load comprising L and R in series. One may measure the power in R and express it as the ratio of the power at any given frequency to that at zero frequency. The relative response in decibels is clearly given correctly by equation (1). One may measure current, in which case one of the equations (2) applies as long as R is constant. In this case the current is independent of frequency, and so the response is constant and is zero decibels. But what if one measures the voltage across R and L?

This voltage is

$$V = IR\sqrt{1 + \omega^2L^2/R^2}$$

and most people unthinkingly write the relative response as 10 log $(1 + \omega^2L^2/R^2)$. This is certainly not the response if this is taken in connection with the power in the load circuit.

The fact of the matter is that, if one is interested in the power in the load, one is measuring the wrong quantity in this case if one measures V. One should measure the power itself or, failing this, the current. When one measures the voltage it is because one is primarily interested in the voltage because one is going to use it to drive another valve stage. This may well be a stage with a resistance load, in which power is developed proportional to the square of its grid voltage. This output power variation with frequency is correctly expressed by 10 log $(1 + \omega^2L^2/R^2)$ and a justification in terms of power is thus indirectly possible for such expressions.

By arguments along these lines it is possible to justify many, if not all, of the apparently odd and incorrect usages of the decibel which wireless people adopt. These do, in fact, prove useful and cause little confusion. We can see no reason at all for replacing the decibel by the decilog in the kind of usage that we have discussed and we think it would be most undesirable to do so; for, even if the voltages or currents with which we are concerned do not directly involve power, they usually do so indirectly. We can, in fact, see very little use for the decilog in the field of wireless, but that does not mean that it may not be very valuable elsewhere. Where there is no question at all of power being involved it would seem very desirable to use it, if only to save the decibel from misuse.

Typical of such cases is the expression of the values of ratios of things like length and frequency, but what about impedance? The author of "The Decilog" quotes this as on a par with length and frequency and implies that the decilog should be used for it. However, impedance is defined as the quotient of voltage by current and so an impedance ratio necessarily involves voltage and current ratios even if, because of the phase relations, power is not directly involved. In the way that we have shown above, however, power is usually indirectly involved, so we feel that for the expression of impedance ratios the decibel is more appropriate than the decilog.

W. T. C.

DISCRIMINATOR CIRCUIT ANALYSIS

Sensitive Asymmetrical Type

By F. L. Morris, B.Sc., A.M.I.E.E.

(Electronics Wing, M.T.D.E., R.E.M.E.)

SUMMARY.—A discriminator circuit of unconventional design is examined and the conversion efficiency calculated. The conversion efficiency is shown to compare favourably with that for the equivalent Foster–Seely type of discriminator. The circuit is simple and easily set up. It is particularly useful as an automatic frequency correction circuit or for use in portable equipment where high efficiency is the first consideration and extreme linearity over a wide frequency range is of secondary importance.

Included as an appendix is an examination of the validity of normal a.c. network theory when frequency-modulated signals are applied to linear circuits.

1. Introduction

UNLIKE the conventional phase discriminator, the circuit examined in this article does not depend for its action on the coupling between two tuned circuits.

The theory is developed on the assumption that a voltage e_0 of constant amplitude is applied to the circuit. In practice this voltage is usually obtained from the anode of a conventional limiter stage. Provided the anode circuit of the latter is sufficiently damped by a suitable resistance, the limiter output will be sensibly of constant amplitude over the frequency range of the discriminator.

For the purposes of calculation, the basic circuit is as shown in Fig. 1(a). The voltage applied is e_0 and circulation currents i_1 and i_2 are assumed to flow. The voltages e_1 and e_2 are applied to the detecting diodes and the difference in the amplitudes of these voltages, multiplied by a factor for diode efficiency, is the discriminator output. The latter is applied to the audio-frequency stages via a suitable r.f. filter.



(a)

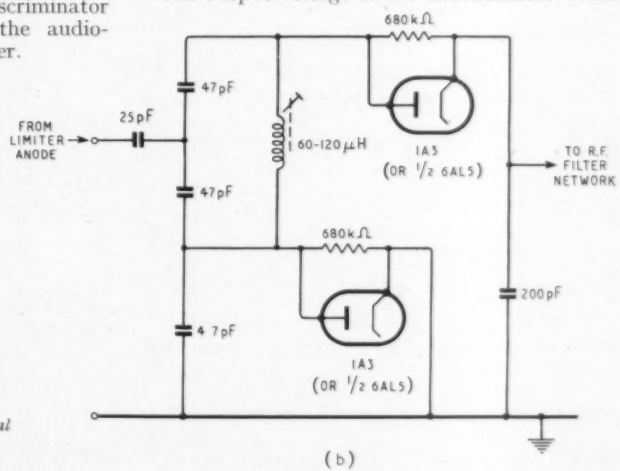

(b)

Fig. 1. *Circuit details; (a) theoretical and (b) practical circuit.*

2. Theory

Expressions for the voltages e_1 and e_2 applied to the diode are developed in Appendix 1. They are as follows:—

$$e_1 = e_0 \cdot \frac{x - j}{(Ax + a) - Aj}$$

and

$$e_2 = e_0 \cdot \frac{(x + 2a) - j}{(Ax + a) - Aj}$$

where

$$A = \left(\frac{C_2}{C_1} + 1 + \frac{C_2}{C}\right)$$

$$a = \frac{QC_2}{2C}$$

$$x = \frac{2\Delta\omega Q}{\omega_0} = \frac{2\Delta f Q}{f_0}$$

$$Q = \frac{\omega_0 L}{R} = \frac{2}{\omega_0 RC} = \text{the magnification of the tuned circuit}$$

$$\omega_0^2 = \frac{2}{LC}$$

Δf = off-tune frequency from the resonant frequency $f_0 = \omega_0/2\pi$.

The output voltage of the discriminator which

MS accepted by the Editor, May 1954, and in revised form July 1954

is applied to the r.f. filter network is proportional to the difference between the amplitudes of e_1 and e_2. It is given by:

$$E_{out} = \eta_d \{ |e_2| - |e_1| \}$$

$$= \eta_d |e_0| \left\{ \frac{|e_2| - |e_1|}{|e_0|} \right\} \quad .. \quad (1)$$

where η_d = the voltage detection efficiency of the diodes. Graphs of $|e_1|/|e_0|$ and $|e_2|/|e_0|$ as functions of the variable x are plotted in Figs. 2 and 3 respectively, for three values of a.

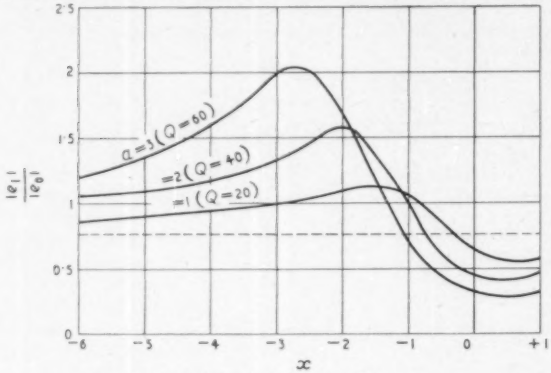

Fig. 2. *Variation of* $|e_1|/|e_0|$ *with* x.

The graph of $(|e_2| - |e_1|)/|e_0|$ against x is obtained by subtraction and is plotted in Fig. 4. It is evident that $E_{out} = 0$ when $|e_1| = |e_2|$. From the values of $|e_1|$ and $|e_2|$ deduced in Appendix 1, the condition for zero output is:

$$|e_0| \sqrt{\frac{x^2 + 1}{(Ax + a)^2 + A^2}} = |e_0| \sqrt{\frac{(x + 2a)^2 + 1}{(Ax + a)^2 + A^2}}$$

i.e., $x = -a$ .. .. (2)

Substituting the values for x and a this condition is: $\Delta f = -\frac{C_2}{4C} f_0$ .. .. .. (3)

Now the conversion efficiency at the point $x = -a$ is given by:

$$\left[\frac{dE_{out}}{d\Delta f} \right]_{x=-a} = \eta_d |e_0| \cdot \frac{d}{d\Delta f} \left[\frac{|e_2| - |e_1|}{|e_0|} \right]_{x=-a}$$

$$= \eta_d |e_0| \left[\frac{d}{dx} \left\{ \frac{\sqrt{(x + 2a)^2 + 1} - \sqrt{x^2 + 1}}{\sqrt{(Ax + a)^2 + A^2}} \right\} \cdot \frac{dx}{d\Delta f} \right]_{x=-a}$$

$$= \eta_d |e_0| \frac{2a}{\sqrt{(a^2 - 1)\,[a^2 (A - 1)^2 + A^2]}} \cdot \frac{2Q}{f_0}$$

$$= \frac{8\eta_d |e_0| Q}{f_0} \cdot \frac{1}{\frac{\beta}{Q} \sqrt{\left(Q^2\alpha^2 + 4\right)\left(Q^2\alpha^2 + 4\left[1 + \frac{1}{\alpha\beta}\right]^2\right)}} \quad (4)$$

$$= \frac{8\eta_d |e_0| Q}{f_0} \cdot B \quad .. \quad .. \quad (5)$$

where: $\alpha = \frac{C_2}{C} = \frac{2a}{Q}$

$$\beta = \frac{C_1 + C}{C_1} = \frac{(A - 1)}{\alpha}$$

and

$$\frac{1}{B} = \frac{\beta}{Q} \sqrt{\left(Q^2\alpha^2 + 4\right)\left(Q^2\alpha^2 + 4\left[1 + \frac{1}{\alpha\beta}\right]^2\right)}$$

$1/B$ is plotted against α in Fig. 5 for various values of Q and β. A study of Fig. 5 and equation (4) shows that for a large conversion efficiency Q should be as large as possible and β as small as possible. Q is limited by practical considerations to values of the order 20–40. The minimum value of β is 1 and occurs when $C_1 \to \infty$; i.e., when C_1 is short-circuited. However, examination of Fig. 5 indicates that provided α is correctly chosen, β can be increased to a value of, say, 3 without seriously increasing $1/B$.

The advantage of reducing the value of C_1 is that the coupling between the discriminator circuit and the previous stage is reduced, thus minimizing the loading effect of the circuit. A convenient compromise is $C_1 = \frac{1}{2}C$, corresponding to $\beta = 3$. If we select this value of β, Fig. 5 indicates that for values of Q between 20 and

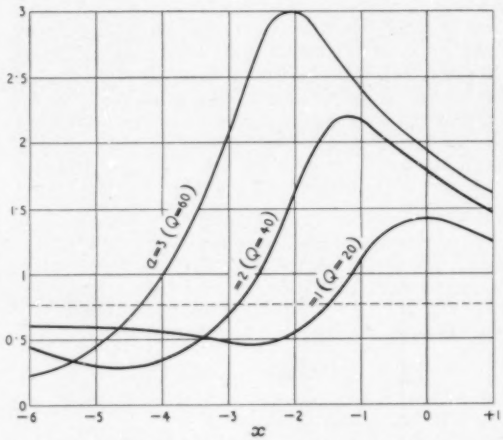

Fig. 3. *Variation of* $|e_2|/|e_0|$ *with* x.

40, $1/B$, will be minimum (i.e., B a maximum) when α is of the order 0·1; i.e., when $C_2 \approx C/10$. It is apparent that the value of α is critical. Now

$$a = \frac{QC_2}{2C} = \frac{Q}{20}, \text{ when } \frac{C_2}{C} = \frac{1}{10}.$$

Thus the curves of Figs. 2, 3 and 4 can be labelled with the appropriate values of Q.

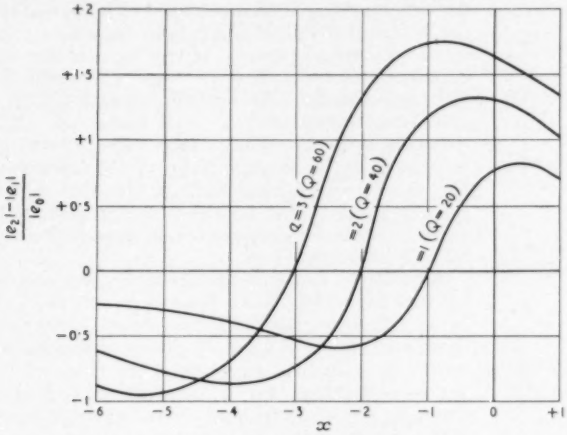

Fig. 4. *Variation of* $(|e_2| - |e_1|)/|e_0|$ *with* x.

The expression for conversion efficiency is usually given with reference to the voltage applied at the grid of the valve preceding the discriminator. If the amplitude of this voltage is $|e_g|$, equation (5) becomes:
Conversion efficiency

$$\eta_1 = \frac{8\eta_d \cdot Q\, g_m |e_g| R_L}{f_0} \cdot B \quad \ldots \quad (6)$$

where g_m = mutual conductance of the valve preceding the discriminator.
R_L = resonant impedance of the anode circuit of the discriminator valve (including the damping effect of the discriminator circuit and slope resistance of the valve)
$B \approx \frac{1}{3}$ from Fig. 5.

The equivalent expression for the conversion efficiency of the conventional phase discriminator has been shown to be [1]:

$$\eta_2 = \frac{2g_m |e_g| R_L \cdot \eta_d}{f_0} \cdot \frac{Q_2 k \sqrt{L_2/L_1}}{(1 + Q_1 Q_2 k^2)(1 + Q_2^2 k^2 L_2/4L_1)^{1/2}} \quad (7)$$

where Q_1 = magnification of the primary circuit
Q_2 = magnification of the secondary circuit
$k = M/\sqrt{L_1 L_2}$ = coupling coefficient
L_1 = primary inductance
L_2 = secondary inductance

Optimum design would appear to be
$Q_1 k = Q_2 k = 1{\cdot}5$, $L_2/L_1 = 1{\cdot}77$
Thus equation (7) reduces to

$$\eta_2 = \frac{2g_m |e_g| R_L \eta_d \cdot Q_2}{f_0} \left[\frac{1{\cdot}5 \times (1{\cdot}77)^{\frac{1}{2}}}{(1 + [1{\cdot}5]^2)(1 + (1{\cdot}5)^2 \times 1{\cdot}77/4)^{\frac{1}{2}}}\right]$$

i.e., $$\eta_2 = \frac{2g_m |e_g| R_L \eta_d Q_2}{f_0} \times 0{\cdot}43 \quad (8)$$

From (6) and (8)

$$\frac{\eta_1}{\eta_2} = \frac{8QB}{2Q_2 \times 0{\cdot}43} \approx 3\frac{Q}{Q_2}$$

Thus for circuits with comparable magnifications $\eta_1/\eta_2 \approx 3$.

3. Practical Application

The design of a discriminator circuit to work at a frequency of 3 Mc/s will be considered. The tuned circuit should have the highest Q possible and the tuning capacitor C should not be too small or difficulty will be experienced with stray capacitances when choosing a value of $C_2 = C/10$.

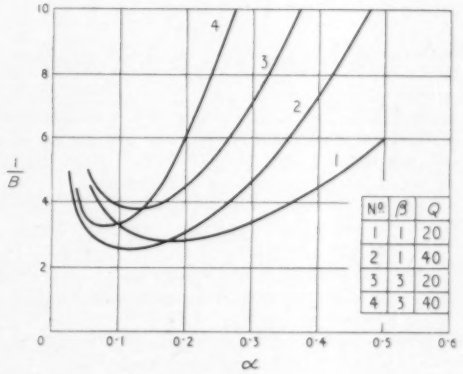

Fig. 5. *Variation of* $1/B$ *with* α.

A convenient tuned circuit comprises an iron-dust cored inductance variable over the range 60–120 μH and two 47-pF capacitors connected in series across the coil. Thus $C_2 = 4{\cdot}7$ pF and for $\beta = 3$, $C_1 = 25$ pF. These values are shown in Fig. 1(b).

From equation (3) $\Delta f = -f_0/40$. Calling this value of Δf, Δf_0, we see that Δf_0, the cross-over point, is independent of the Q of the tuned circuit. Further in the circuit under

discussion this cross-over is to be at 3 Mc/s, so

$$f_0 + \Delta f_0 = 3{\cdot}000 \text{ Mc/s}$$
$$f_0\,(1 - 1/40) = 3{\cdot}000 \text{ Mc/s}$$
$$\therefore f_0 = \frac{40}{39} \times 3 \text{ Mc/s} = 3{\cdot}078 \text{ Mc/s}$$

Thus when the discriminator is correctly adjusted for zero output at 3 Mc/s, the tuned circuit is actually tuned to a frequency 78 kc/s above this frequency.

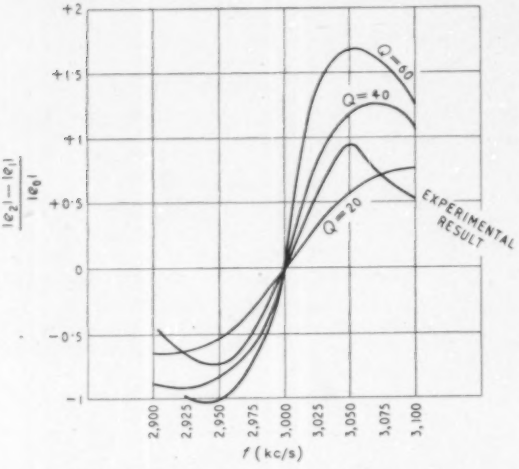

Fig. 6. *Variation of* $(|e_2| - |e_1|)/|e_0|$ *with* f.

In Fig. 6 the curves in Fig. 4 are redrawn with x reduced to a frequency scale by means of the relationship $x = 2\Delta fQ/f_0$. The main characteristics of the curves are as follows:

(a) The curves are asymmetrical about the f-axis, the positive portion being of greater amplitude than the negative.
(b) The peaks occur from 50–100 kc/s from the cross-over point, depending on the Q of the circuit.
(c) The curves are approximately linear between positive and negative peaks.
(d) The slopes of the straight portions of the curves increase with increase of Q.
(e) The amplitudes of the curves increase with increase of Q.

Setting up the circuit is simple. With a 3-Mc/s signal applied to the grid of the limiter, the discriminator inductance is tuned to give zero output as measured on a balanced valve-voltmeter. The tuning is then slightly adjusted to give a small positive or negative reading. The limiter anode is then tuned to give maximum indication. Finally, the discriminator is tuned back to zero output.

4. Experimental Results

A signal of 1·13 V peak was injected from a signal generator into the grid of the limiter valve. The amplitude of the resulting signal at the anode (i.e., the input e_0 to the discriminator circuit), was 7·5 V peak. The variation of discriminator output with change of frequency was noted, using a balanced valve voltmeter. A diode efficiency of 0·85 was assumed. The discriminator output divided by $7{\cdot}5 \times 0{\cdot}85$ is plotted in Fig. 5, marked 'Experimental Result', and is to the same scale as the calculated curves. It will be seen that the experimental curve has the same characteristics as the calculated curves and corresponds to a calculated curve with a Q of about 30. The experimental curve falls off more rapidly than the calculated curves beyond 50 kc/s from cross-over, because the assumption that e_0 is constant is then no longer true. The value of e_0 diminishes rapidly with increase or decrease of frequency beyond 50 kc/s from cross-over.

Actually, it was found that when e_0 was plotted against frequency, for a fixed input to the grid of the limiter valve, the resulting curve was double-humped. The main effect of the double humping is slightly to increase the slope of the curves calculated for a constant e_0. Double humping is to be expected as the effective anode load of the limiter is comprised of two tuned circuits capacitively coupled.

The conversion efficiency as calculated from data given above is 0·14 V per 1 kc/s off-tune per 1 V peak input to the limiter grid.

5. Conclusions

This unconventional circuit is simple to construct and set up. It gives a conversion efficiency which compares favourably with that for the conventional Foster–Seely phase discriminator. However, the discriminator characteristic is asymmetrical and it is not linear over a wide frequency range.

The asymmetry of the characteristic could be overcome to some extent by:

(a) peaking the limiter at a frequency below the cross-over frequency

or

(b) adjusting the cross-over frequency to a point midway between the positive and negative peaks.

The circuit is useful for automatic frequency correction, where linearity is not of major importance. Its main use is in mobile communication equipment where size and weight must be kept to a minimum and high output fidelity is a secondary consideration.

REFERENCE

[1] "The Phase Discriminator", K. R. Sturley, *Wireless Engineer*, February 1944, p. 75.

APPENDIX 1

Expressions for the voltages applied to the diode detectors.

Basic Equations

Application of Kirchhoff's laws to the circuit of Fig. 1(a) gives the following equations:

$$e_0 = \frac{1}{j\omega}\left(\frac{1}{C_1}+\frac{1}{C}+\frac{1}{C_2}\right)i_1 - \frac{1}{j\omega C} i_2 \quad \ldots \quad (1.1)$$

$$0 = \frac{1}{j\omega C} i_1 - \left[R + j\left(\omega L - \frac{2}{\omega C}\right)\right] i_2 \quad \ldots \quad (1.2)$$

$$e_1 = \frac{1}{j\omega C_2} i_1 \quad \ldots \quad (1.3)$$

$$e_2 = e_1 + (R + j\omega L)\, i_2 \quad \ldots \quad (1.4)$$

Evaluation of e_1

Eliminating i_2 from equations (1.1) and (1.4), using equation (1.2), gives:

$$e_0 = \frac{1}{j\omega}\left\{\left(\frac{1}{C_1}+\frac{1}{C}+\frac{1}{C_2}\right) - \frac{1}{j\omega C^2\left[R + j\left(\omega L - \frac{2}{\omega C}\right)\right]}\right\} i_1 \quad \ldots \quad (1.5)$$

$$e_2 = e_1 + \frac{(R + j\omega L)}{j\omega C\left[R + j\left(\omega L - \frac{2}{\omega C}\right)\right]} i_1 \quad \ldots \quad (1.6)$$

Eliminating i_1 from equations (1.3) and (1.4) gives:

$$e_1 = \frac{e_0}{\left(\frac{C_2}{C_1}+1+\frac{C_2}{C}\right) + \frac{C_2}{2C\,[(\omega^2 LC/2 - 1) - j\omega RC/2]}}$$

$$= \frac{e_0}{A + \dfrac{a}{Q\left[\left(1+\dfrac{\Delta\omega}{\omega_0}\right)^2 - 1\right] - j}}$$

where: $A = \left(\dfrac{C_2}{C_1}+1+\dfrac{C_2}{C}\right)$

$$\omega_0^2 = \frac{2}{LC}$$

$$Q = \frac{2}{\omega RC} \approx \frac{2}{\omega_0 RC}$$

$$a = \frac{QC_2}{2C}$$

$$\omega = \omega_0 + \Delta\omega$$

Since $\Delta\omega \ll \omega_0$

$$e_1 \approx \frac{e_0}{A + \dfrac{a}{2\,\dfrac{\Delta\omega}{\omega_0} Q - j}}$$

i.e., $$e_1 = e_0 \cdot \frac{x - j}{(Ax + a) - Aj} \quad \ldots \quad (1.7)$$

where: $$x = \frac{2\Delta\omega}{\omega_0} Q = \frac{2\Delta f Q}{f_0}$$

$$\therefore\ |e_1| = |e_0| \sqrt{\frac{x^2+1}{(Ax+a)^2 + A^2}} \quad \ldots \quad (1.8)$$

In equation (1.8), which gives the amplitude of e_1 in terms of the amplitude of e_0 and the circuit parameters, a and A are constant and x is proportional to the change in frequency Δf.

Differentiating equation (1.8) with respect to x shows that $|e_1|$ has a maximum value given by

$$x = -\left[\frac{a + \sqrt{a^2 + 4A^2}}{2A}\right]$$

and a minimum value given by

$$x = +\left[\frac{\sqrt{a^2 + 4A^2} - a}{2A}\right]$$

Substituting in equation (1.8) gives:

$$|e_1|_{max} = \frac{|e_0|}{A}\sqrt{\frac{\sqrt{a^2+4A^2}+a}{\sqrt{a^2+4A^2}-a}}$$

$$|e_1|_{min} = \frac{|e_0|}{A}\sqrt{\frac{\sqrt{a^2+4A^2}-a}{\sqrt{a^2+4A^2}+a}}$$

The graphs in Fig. 2 are based on the above equations with $A = 1{\cdot}3$.

The curves are asymptotic to the dotted line corresponding to $1/A = 0{\cdot}77$.

Evaluation of e_2

From the equations (1.3) and (1.6), eliminating i_1 we get:

$$e_2 = e_1\left[1 + \frac{C_2(R + j\omega L)}{C\left[R + j\left(\omega L - \frac{2}{\omega C}\right)\right]}\right]$$

$$\approx e_1\left[1 + \frac{j\omega LC_2}{C\left[R + j\left(\omega L - \frac{2}{\omega C}\right)\right]}\right]$$

Since $R \ll \omega L$ over the frequency range considered.

If $$Q = \frac{\omega L}{R} \approx \frac{\omega_0 L}{R} = \frac{2}{\omega_0 LC}$$

$$e_2 = e_1\left[1 + \frac{jC_2}{C\left[1/Q + j\left(1 - \frac{2}{\omega^2 LC}\right)\right]}\right]$$

$$= e_1\left[1 + \frac{2ja}{1 + jQ\left(1 - \frac{\omega_0^2}{\omega^2}\right)}\right]$$

$$= e_1\left[1 + \frac{2a}{x - j}\right]$$

i.e., $$e_2 = e_1\frac{(x + 2a) - j}{x - j} \quad \ldots \quad (1.9)$$

From equations (1.7) and (1.9), eliminating e_1 we get:

$$e_2 = e_0\,\frac{(x + 2a) - j}{(Ax + a) - Aj} \quad \ldots \quad (1.10)$$

and $$|e_2| = |e_0|\sqrt{\frac{(x+2a)^2 + 1}{(Ax+a)^2 + A^2}} \quad \ldots \quad (1.11)$$

Differentiating equation (1.11) with respect to x shows that $|e_2|$ has a maximum value given by

$$x = \frac{-a(1 + 2A) + \sqrt{a^2(1+2A)^2 - 4A(2a^2 - A)}}{2A}$$

and a minimum value given by

$$x = \frac{-a(1 + 2A) - \sqrt{a^2(1+2A)^2 - 4A(2a^2 - A)}}{2A}$$

The corresponding values of $|e_2|$ are:

$$|e_2|_{max} = \frac{|e_0|}{A}\sqrt{\frac{\sqrt{a^2(1+2A)^2 - 4A(2a^2 - A)} + a(2A - 1)}{\sqrt{a^2(1+2A)^2 - 4A(2a^2 - A)} - a(2A - 1)}}$$

$$|e_2|_{min} = \frac{|e_0|}{A}\sqrt{\frac{\sqrt{a^2(1+2A)^2 - 4A(2a^2 - A)} - a(2A - 1)}{\sqrt{a^2(1+2A)^2 - 4A(2a^2 - A)} + a(2A - 1)}}$$

The graphs in Fig. 3 are based on the above equations with $A = 1{\cdot}3$. The curves are asymptotic to the dotted line corresponding to $1/A = 0{\cdot}77$.

(Appendix 2 is overleaf)

APPENDIX 2*

Examination of the validity of normal a.c.-network calculations when frequency-modulated signals are applied to linear circuits.

Consider the circuit shown in Fig. 7 where a voltage signal v is applied to a four-terminal network resulting in a current i_n flowing in a load represented by Z. Linear circuit elements are assumed, and steady-state solutions only are considered.

Fig. 7.

The expression for the current i_n in terms of v and the circuit parameters is obtained by solving the set of simultaneous equations which are the result of the application of Kirchhoff's Laws to the network. It will be of the form:

$$F(D).\ i_n = \Phi(D).\ v \quad .. \quad .. \quad .. \quad .. \quad (2.1)$$

where both $F(D)$ and $\Phi(D)$ are of the form:

$$[a_nD^n + a_{n-1}D^{n-1} + \ldots + a_1D^1 + a_0 + b_1D^{-1} + \ldots + b_{m-1}D^{-m+1} + b_mD^{-m}]$$

where $D \equiv d/dt$ and $D^{-1} \equiv \int^t dt$ and the coefficients are constants.

Provided we restrict our considerations to voltages having the vector form $v = V_0\, e^{j\omega t}$ where V_0 and ω are independent of t, the operator D can be replaced by $j\omega$ and D^{-1} by $1/j\omega$. Equation (2.1) then reduces to

$$\begin{aligned} i_n &= \frac{\Phi\,[j\omega]}{F\,[j\omega]}\, V_0 e^{j\omega t} \\ &= (A + jB)\, V_0 e^{j\omega t} \\ &= V_0\sqrt{A^2 + B^2}\, e^{j(\omega t + \phi)} \end{aligned}$$

where $\phi = \tan^{-1}\dfrac{B}{A}$

However, if the applied voltage is of the vector form $v = V_0 e^{jf(t)}$ there is in general no simple substitution for the operator D.

If $v = V_0 e^{jf(t)}$, we have:

$$\left.\begin{array}{ll} D.\ v \equiv jvf'(t) & D^{-1}\left\{1 - \dfrac{jf''(t)}{[jf'(t)]^2}\right\} v \equiv \dfrac{v}{jf'(t)} \\ D^2.\ v \equiv v\{[jf'(t)]^2 + jf''(t)\} & D^{-2}\left\{\dfrac{1}{jf'(t)} - \dfrac{2jf''(t)}{[jf'(t)]^3}\right\} v \equiv \dfrac{v}{[jf'(t)]^2} \\ \ldots\ldots\ldots\

VISUAL IMPEDANCE-MATCHING EQUIPMENT

For 80—250 M/cs

By R. Dalziel, M.A., A.M.I.E.E. and A. Challands

SUMMARY.—Electromagnetic energy is often transferred from a source to a load via a cable, as for instance when an aerial is fed from a transmitter. This paper describes an instrument which displays in one cathode-ray tube picture the degree of match of the load to the cable over the frequency band 80 Mc/s to 250 Mc/s. The method employs frequency sweeping, the test oscillator being mechanically swept over the above frequency range. The instrument has been used to measure impedances and has given values which agree well with those obtained by other means.

Introduction

THE design of very wideband aerials is largely empirical, guidance being provided by the theoretical work of Schelkunoff[1], Papas and King[2], and others. This means that experimental adjustments have to be made in order that the impedance of the aerial shall match the impedance of the feeder cable over the frequency band within which the aerial has to transmit or receive. An adjustment which improves the match at one frequency might worsen it at another. It is therefore desirable to have a simultaneous indication of matching at all frequencies or, at least, at a large number of frequencies. This implies that the method to be adopted should employ frequency modulation. Laboratory apparatus that affords a simultaneous visual display of matching over a frequency band of 30 Mc/s maximum in the range 10 Mc/s to 250 Mc/s has been described by Libby[3]. A similar type of equipment which displays a 40-Mc/s band has been demonstrated at a Physical Society's Exhibition[4], the range in this case being 40–600 Mc/s. Both these systems obtain a frequency-modulated test signal by beating the output of two klystron oscillators, one of fixed frequency and one of varying frequency. The impedance under test is connected to the end of a long cable and a voltage proportional to that reflected from the cable termination is displayed on a cathode-ray oscilloscope. In ref. 3 an analogy is drawn with the f.m. aircraft altimeter. No indication is given of the accuracy of the method and no results are quoted.

When very wideband aerials are being investigated a frequency scan of 30 Mc/s is not enough and changing the mean frequency step by step is not a rapid process when beating klystrons are used. The equipment which is described in the present paper has a cathode-ray oscilloscope display of matching over the frequency band 80 Mc/s to 250 Mc/s, the whole range being scanned by the test signal in one sweep. The face of the oscilloscope is calibrated in terms of standing-wave ratio (s.w.r.) and the degree of match can be read at a glance. The magnitude and source of any undesired reflections can also be determined; e.g., a badly designed or faulty cable connector. By making more accurate measurements the impedance of the load can be deduced. In the next section the operation of the instrument is described in terms of transmission-line theory and the important design factors are evolved. Attention has been paid to these factors in the design, and the accuracy achieved is indicated by results.

MS accepted by the Editor, May 1954



Fig. 1. *Generator feeding a load Z_2 through a transmission line.*

Principle of Operation

Suppose that we have a generator of e.m.f. E and internal impedance Z_1 and that power has to be transmitted from this generator along a cable of length l to a load of impedance Z_2 (Fig. 1). Let us assume that the cable is lossless with a characteristic impedance Z_0 and propagation constant $j\beta = j2\pi/\lambda$ where λ is the wavelength in the cable.

The reflection coefficient ρ_1 at the input end of the cable is $\dfrac{Z_0 - Z_1}{Z_0 + Z_1}$ and that at the output end ρ_2 is $\dfrac{Z_0 - Z_2}{Z_0 + Z_2}$. The voltage V at a distance x from the generator is given[5] by the expression,

$$\frac{Z_0 E}{Z_0 + Z_1} \cdot \frac{e^{-j\beta x} - \rho_2 e^{-j\beta(2l-x)}}{1 - \rho_1 \rho_2 e^{-2j\beta}} \quad \ldots \quad \ldots \quad (1)$$

Apart from the factor $Z_0 E$, the numerator of

(1) represents the variation along the cable of the sum of two voltage waves, one of magnitude unity travelling from the generator to the load and the other of magnitude $|\rho_2|$ travelling in the reverse direction. The denominator is independent of the distance x along the cable. These two waves produce an interference pattern and it is standard practice to measure the standing-wave ratio by sliding a detector probe along a slotted section of line connected to the cable. The detector measures the maximum and minimum values of V. Since both the denominator and the factor $Z_0 E$ in the numerator are independent of x they appear only as scale factors on the voltage measurements and they cancel out when calculating the s.w.r.

A more complicated situation arises when x is kept constant and the generator frequency is varied. We still have voltage waves travelling in both directions in the cable but the denominator in expression (1) is no longer constant since ρ_1, ρ_2, β and probably Z_1 all vary with frequency. In the numerator, E might also vary with frequency. Under these conditions the voltage V at a fixed distance x plotted as a function of frequency has no very clear meaning. We can, however, make the denominator completely independent of frequency by choosing the generator internal impedance Z_1 to be equal to the characteristic impedance of the cable at all frequencies; i.e., $Z_1 \equiv Z_0$. This condition makes $\rho_1 \equiv 0$ and expression (1) again takes the simple form of two interfering voltage waves. We can now measure the voltage at a fixed position x and effectively move the interference pattern past this point by varying the frequency of the generator. For convenience x is taken to have the value zero and expression (1) assumes a simple form giving

$$V = \frac{E}{2}\left[1 - \rho_2 e^{-j4\pi l/\lambda}\right] \quad .. \quad .. \quad (2)$$

where ρ_2 is a function of λ. E is constant by suitable circuit design. For clarity of exposition we shall assume in the first place that ρ_2 is real and constant. The second bracketed term on the right-hand side of (2) consists of a vector of magnitude ρ_2 which, as λ varies, rotates round the unit vector. The vector sum consequently has a maximum value $1 + \rho_2$ when the two vectors are in phase, and a minimum value $1 - \rho_2$ when they are in anti-phase. That is to say,

$$V_{max} = \frac{E}{2}\left[1 + \rho_2\right] \quad .. \quad .. \quad .. \quad (3)$$

and $$V_{min} = \frac{E}{2}\left[1 - \rho_2\right] \quad .. \quad .. \quad .. \quad (4)$$

As λ is varied, the right-hand side of (2) therefore passes through a series of maximum and minimum values given by (3) and (4).

When the load is matched to the cable so that $\rho_2 = 0$, then V has a constant value given by

$$V_{matched} = \frac{E}{2} \quad .. \quad .. \quad .. \quad (5)$$

The s.w.r. is obtained by dividing (3) by (4), thus,

$$\text{s.w.r.} = \frac{1 + \rho_2}{1 - \rho_2} \quad .. \quad .. \quad .. \quad (6)$$

For a given s.w.r., equation (6) determines ρ_2, and V_{max} and V_{min} can then be deduced from ρ_2 and E, using (3) and (4). These voltage levels can be marked on the cathode-ray oscilloscope display as an s.w.r. calibration.

The frequencies at which maxima occur are those for which there is an even number of half-wavelengths in twice the length of the cable, and minima occur at those frequencies for which there is an odd number of half-wavelengths in twice the length of the cable. The frequency-resolving power can be defined as the smallest difference between two frequencies at which V has a turning value, and it depends entirely on the electrical length of the cable. It is given by

$$f' - f'' = v\left(\frac{1}{\lambda'} - \frac{1}{\lambda''}\right) = v\left(\frac{n}{2l} - \frac{2n-1}{4l}\right) = \frac{v}{4l} \quad .. \quad .. \quad .. \quad .. \quad .. \quad (7)$$

where f' is a frequency at which a maximum occurs and f'' is the next lower frequency at which a minimum occurs. v is the velocity of electromagnetic waves in the cable and n is the number of half-wavelengths in the length l at frequency f'.

The most convenient cable is a conventional flexible co-axial type, for example, Uni-radio No. 1 which has a solid polyethylene dielectric. For this cable $v = 0{\cdot}66c$ where c is the free-space velocity of light. A length of 10 metres gives a resolving power of 5 Mc/s so that 34 maxima and minima occur in a frequency range of 170 Mc/s and 17 complete waves appear on the display to be described later.

As a next step let us suppose that $|\rho_2|$ is independent of frequency but that the phase of ρ_2 is a function of frequency. Maxima and minima still occur when the constituent voltages in equation (2) are in phase and in anti-phase respectively and they have the same magnitudes if $|\rho_2|$ is as before. The contribution of the phase of ρ_2 to the total phase of the rotating vector is small compared with the contribution from the electrical length of the cable so that the oscillating behaviour of V is broadly as before. However, the turning values now occur at frequencies which are displaced above or below their previous values according to the sign of the reactance of the load at those frequencies. Equation (7) is

now in error by an amount which depends on the rate of change of the phase of ρ_2 with frequency in the region of f' and f'', but this is unimportant since the right-hand side of (7) still determines the length l which will yield the required number of maxima and minima in the total frequency range.

The most general case is when ρ_2 varies in modulus and in phase. In order that maxima and minima of V shall still occur when the two vectors in (2) are in phase and in anti-phase respectively, we must specify that $|\rho_2|$ varies much more slowly with frequency than does the relative phase of the two vectors, which phase is of course made up of the electrical length of the cable and the phase of ρ_2. It is safe to assume that this condition is met in practice when power is being transferred to a load over a very wide band of frequencies. We still have equations of the form of (3) and (4) and they are

$$V_{max} = \frac{E}{2}\left[1 + |\rho_2|_{\lambda'}\right] \quad .. \quad .. \quad (3a)$$

and $$V_{min} = \frac{E}{2}\left[1 - |\rho_2|_{\lambda''}\right] \quad .. \quad .. \quad (4a)$$

where in (3a) the function $|\rho_2|_{\lambda'}$, has a value corresponding to a wavelength λ' at which a maximum occurs and in (4a) $|\rho_2|_{\lambda''}$ has a value corresponding to a wavelength λ'' at which a minimum occurs. Equation (5) holds at λ' and λ''.

From (3a) and (5) we can calculate $|\rho_2|$ at λ' and the s.w.r. at λ' can be evaluated from the expression

$$\text{s.w.r.} = \frac{1 + |\rho_2|_{\lambda'}}{1 - |\rho_2|_{\lambda'}} \quad (6a)$$

The s.w.r. at λ'' can be calculated similarly using formulae (4a) and (5).

Previous statements concerning s.w.r. calibration and frequency-resolving power still apply.

Although a loss-less cable is desirable, in practice there is usually some attenuation and the effect of this will now be discussed. Consider the 10-metre length of Uni-radio No. 1. From manufacturers' data, the total go and return attenuation is 1·9 db at the high-frequency end of the band, corresponding to a voltage ratio of 0·8. It can be shown from this that an s.w.r. of 2:1 on a loss-less cable would appear as 1·8:1 on this cable. For engineering applications this difference does not spoil the value of the display. At lower frequencies the attenuation is less. The effect of attenuation on the visual display is most apparent when $|\rho_2| = 1$. In this case the V_{min} fail to reach zero by an amount which depends on the attenuation and which can be measured if desired to yield attenuation data.

In calculations and calibration the attenuation can be included, since formulae (3a) and (4a) become for the above cable at the highest frequency,

$$V_{max} = \frac{E}{2}\left[1 + 0{\cdot}8\,|\rho_2|\right] \quad .. \quad .. \quad (3b)$$

$$V_{min} = \frac{E}{2}\left[1 - 0{\cdot}8\,|\rho_2|\right] \quad .. \quad .. \quad (4b)$$

and equation (5) remains as

$$V_{matched} = \frac{E}{2} \quad .. \quad .. \quad .. \quad (5)$$

from which $|\rho_2|$ can be calculated as before. For impedance measurement (see a later section) a circle diagram is used and, of course, cable attenuation is allowed for on the cursor.

Practical System

A schematic diagram of the complete system is shown in Fig. 2. The generator is a wide-range tunable oscillator, tuning over the band 80–250 Mc/s being carried out repetitively by mechanical means. The X-deflection of the display oscilloscope is synchronized with the mechanical frequency sweep by a photo-electric cell. Thus the X co-ordinate of the display represents frequency to some scale. The generator, being amplitude stabilized, is a constant voltage and low impedance source. It is coupled to the aerial feeder cable via a resistor of selected value such that the total source impedance is equal to the characteristic impedance of the cable. The instantaneous voltage at the junction of this resistor and the feeder is the vector sum of the

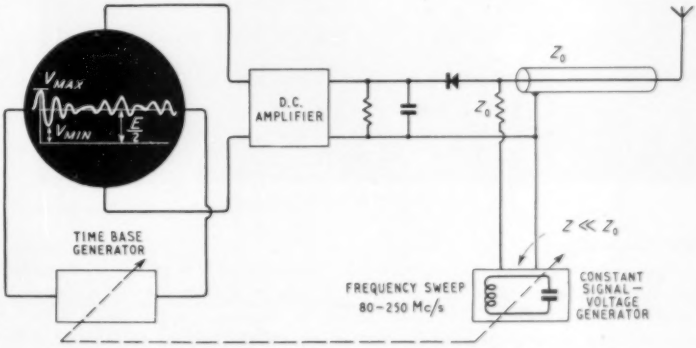

Fig. 2. *General arrangement of the equipment.*

outgoing and returning voltages. After detection, this resultant voltage is amplified and applied to the Y-deflector plates of the display tube.

For a matching display it is not essential to put $x = 0$. For instance, the voltage measured could be the one at the aerial end of the feeder. In general this will be less convenient, and is not desirable because it means connecting to the aerial terminals something that is not normally there. The presence of the feeder cable between detector and aerial has another advantage. It enables one to calculate the impedance of the aerial at those frequencies which give a maximum or minimum of V. At these frequencies the impedance at the input to the cable is resistive, and has a value given by the s.w.r. and Z_0 of the cable. The knowledge of the electrical length of the feeder and use of a circle diagram yield the aerial impedance. Some impedance measurements are given in a later section.

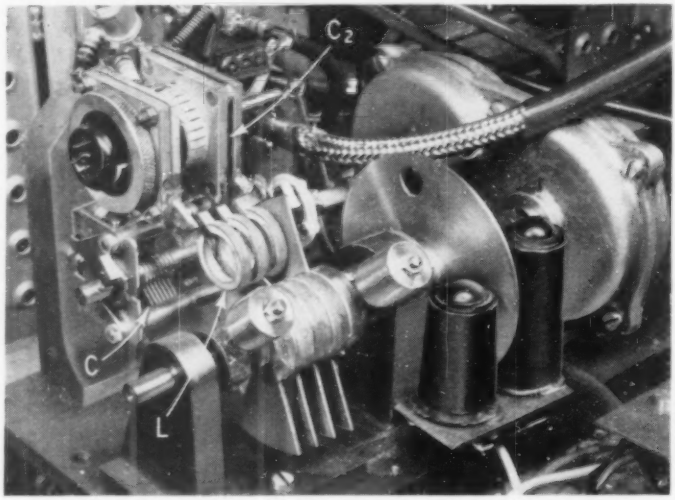

Fig. 3. *Detail of the oscillator unit.*

The Generator

The core of the system is the wide-range amplitude-stabilized oscillator. A Colpitts oscillator is used, and an obvious choice of tuning unit would appear to be a 'butterfly' circuit. However, this method was tried and abandoned for the following reasons:—

(1) The large physical length of the unit required for resonance at the lowest frequencies made the oscillator very susceptible to oscillations in unwanted modes.
(2) The difficulty of coupling to the feeder.
(3) Mechanical trouble due to the relatively high speed required (1,500 rev/min).

Details of the mechanically-swept oscillator are shown in Fig. 3, and the circuit diagram of the complete generator is in Fig. 4 where V_1 is the oscillator valve. In order to get the wide frequency range, variable capacitance and variable inductance tuning are used simultaneously. The variable capacitor C in Fig. 4 is a modified standard two-gang capacitor, and to get a small minimum capacitance the two sections are connected in series at the rotor, which is otherwise left floating. In this type of capacitor the rotor turns in ball bearings mounted on the capacitor frame. Both the rotor and the capacitor frame are electrically floating in this circuit, and both have stray capacitances to ground and other components. It was found that variable electrical contact in the bearings when the rotors were turning gave rise to severe electrical noise. This was cured by substituting Tufnol bearings for the metal ones. Another advantage of the Tufnol bearings is that the stray capacitance in the radio-frequency circuit is reduced because an impedance has been placed between rotor and frame. The variable inductor L in Fig. 4 consists of a helical coil, the turns being in parallel planes, and a set of vanes similar to the rotor vanes of a capacitor move between the turns. The vanes are of different sizes and can be shaped to alter the law. Both inductance and capacitance shafts are dynamically balanced and coupled through 1:1 gears to a 1,500 r.p.m. synchronous induction motor. Only half the period of revolution is used (i.e., the frequency changes from maximum to minimum in 20 milliseconds) and only during this period is the trace drawn on the c.r.o. No attempt has been made to make the frequency/time law linear as it was found that to a first order it is exponential, and to display it on the screen an exponential time base is used. Linearity of the trace is by no means essential as the trace is self-calibrated in frequency, successive peaks being 10 Mc/s apart. Also on the shaft is a rotating disc, which together with a photo-electric cell and light source provides a triggering pulse to start the time base and brightening circuits. Amplitude stabilization is accomplished by rectifying the oscillator output with the rectifier D_1 and using this voltage to control the h.t. supply to the oscillator valve via a d.c. amplifier (V_2 to V_6). The gain of the d.c. amplifier from oscillator output to

oscillator anode is about 80 db, and the frequency response is 6 db down at 8 kc/s.

The time constant in the control circuit has to be short enough to cope with—in particular—the time variation of loading that occurs when the voltage at $x = 0$ changes from a maximum to a minimum. The control valve is placed in parallel with the oscillator valve.

The output impedance of the oscillator is less than 1 ohm over the whole frequency range, and the amplitude is 1·0 V r.m.s., constant within 1%. The low impedance output is connected to the feeder via a selected resistor R (Fig. 4), so that $R +$ output impedance of oscillator $= Z_0$. This satisfies the condition $\rho_1 \equiv 0$. The r.f. voltage V at the junction of R and the feeder, which is the point $x = 0$, is detected, amplified and applied to the vertical deflection plates of a c.r.o. (Fig. 2).

It was found that particular care was required in the design of the circuits associated with D_1 and D_2 (Fig. 4). Stray inductance of the wiring R to D_1 will mean that the control voltage at the cathode of D_1 is different from the voltage at the generator end of R; i.e., although the control voltage is constant, the generated voltage is not. Also, stray capacitance from the anode of D_2 to earth has to be kept at a minimum to prevent shunting the feeder. The lead inductance from R into the feeder has also to be kept at a minimum.

Display Apparatus

The display unit consists of a flat-faced 3½-in. cathode-ray tube, stabilized r.f. power unit, time base and brightening circuits. This is shown in Fig. 5. The triggering pulse is amplified and triggers a one shot anode-coupled multivibrator. This provides the brightening pulse, which, after it has been differentiated, starts the time base.

D.c. amplification of the detected voltage is preferred to a.c. amplification because (a) it enables a quick check to be made of the constancy of the generated voltage over the frequency band, (b) it allows static s.w.r. measurements to be made, and (c) it permits accurate determination of the frequency at which a V_{min} occurs—information which yields the electrical length of the line. The response of the d.c. amplifier (Fig. 5) is 6 db down at 80 kc/s and the gain is about 44 db. This bandwidth is greater than would appear to be necessary because although the total duration of trace is 20 milliseconds it is exponential and therefore the duration of each cycle varies. The d.c. amplifier is shown in Fig. 5 and is of conventional design.

Applications

As explained previously, the X-axis represents frequency and the Y-axis is the modulus of the vector sum of the outgoing and returning voltage waves at the generator end of the cable. The display is, to a certain extent, self-calibrated in frequency—there are 17 oscillations, the frequency difference between adjacent turning values being 5 Mc/s. The voltages corresponding to standing-wave ratios of 1, 2, 3 and 4 to one have been calculated and marked on the face of the c.r.o. To this scale the envelope of the peaks therefore represents standing-wave ratio against frequency.

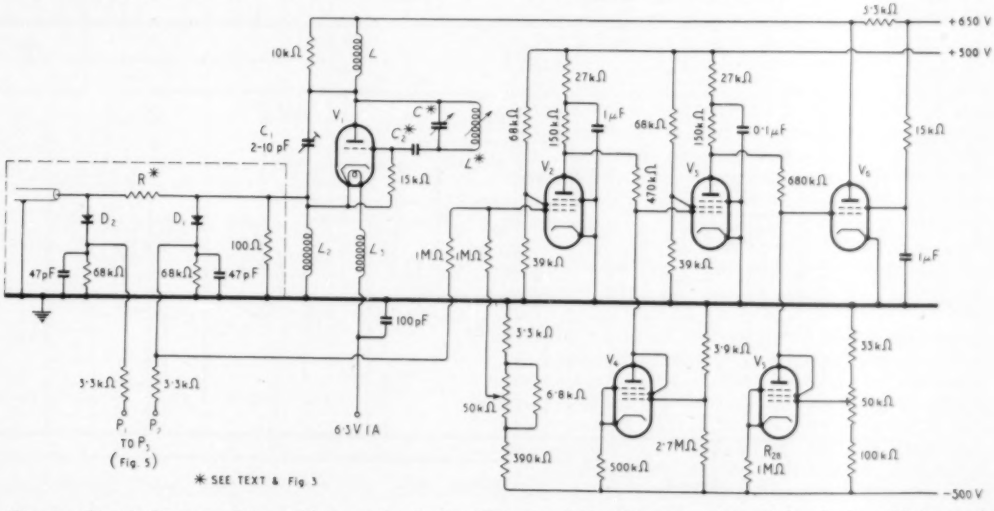

Fig. 4. *Circuit diagram of the oscillator unit. L_1 has 28 turns of No. 25 s.w.g. wire and L_2, L_3 have 16 turns of No. 20, all on ¼-in. Distrene rods; $V_1 = CV397$; V_2, V_3, V_4, $V_5 = CV138$; $V_6 = CV345$; D_1, $D_2 = GEX66$.*

The width of the envelope represents the modulus of the reflection coefficient $|\rho_2|$ and the ordinate can be calibrated in terms of $|\rho_2|$ if desired.

Fig. 6 shows some photographic records of c.r.o. traces for various terminations. All terminations were connected through an r.f. plug and socket.

(a) A shorting wire across the plug. This display approaches the case of a theoretically infinite s.w.r., deviations from a perfect rectangular envelope being caused by the imperfection of the short circuit, by the stray impedances mentioned previously and by attenuation.

(b) A resistor of 140 ohms. This shows a constant s.w.r. of 2:1.

(c) A thin half-wave dipole resonant at 155 Mc/s. The dipole is a balanced load connected to an unbalanced feeder.

(d) Air Ministry wideband aerial[6] with unbalance–balance transformer.

(e) A Discone aerial mounted 10 ft above ground. This aerial is of the type but not of the dimensions of those quoted in ref. 7.

(f) A long length of Uni-radio 32 with open end. The fine structure is caused by reflections from the open end of the long cable and the coarse structure is due to reflections from

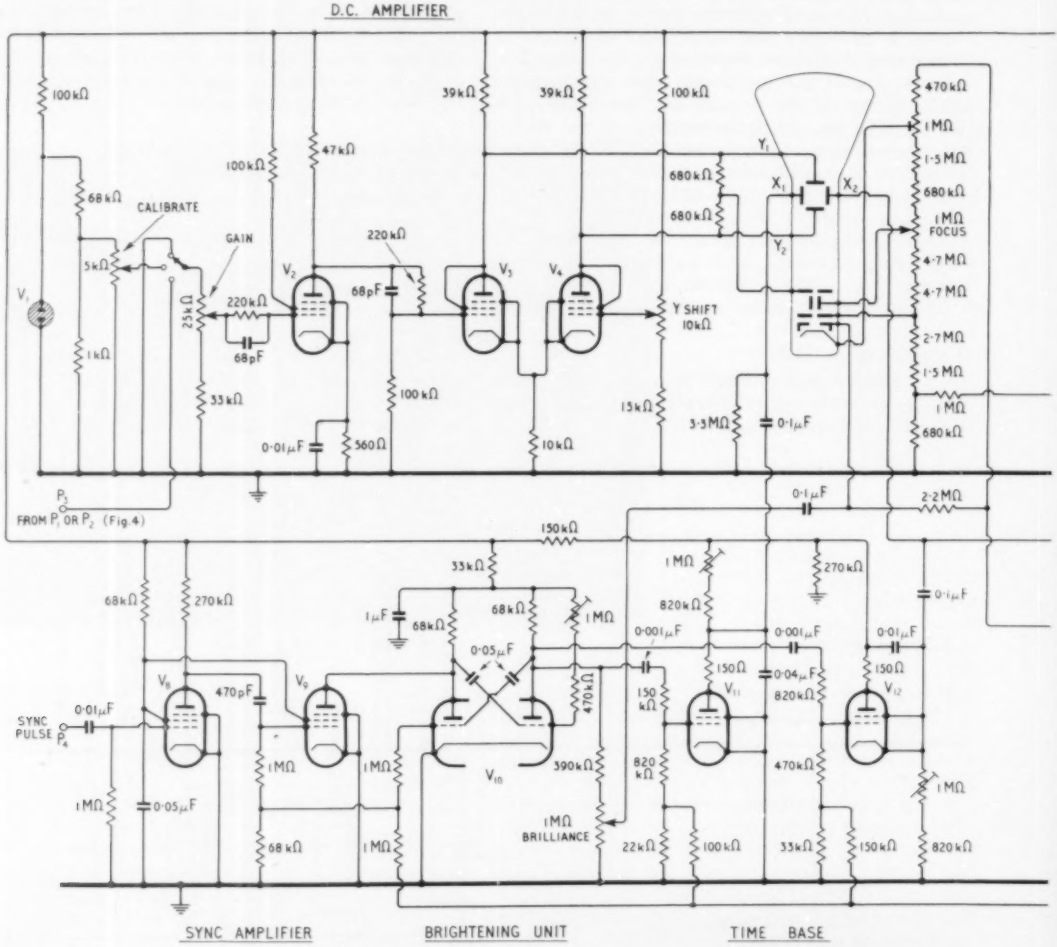

Fig. 5. *Circuit diagram of the display apparatus and power supply;* $V_1 = CV449$; V_2, V_3, V_4, V_5 V_6, V_8, $V_9 = CV138$; $V_7 = CV345$; $V_{10} = CV858$; V_{11}, $V_{12} = CV797$; $V_{13} = CV261$; $V_{14} = CV511$.

the junction of the two cables. The positions of discontinuities can readily be deduced from the periodicities of the waveform and equation (7). The amplitude of the more rapid oscillations (fine structure) decreases towards the right-hand side of the picture indicating that there is severe attenuation in this length of Uni-radio 32 at high frequencies.

Measurement of Impedance

When a voltage maximum or minimum corresponding to an s.w.r. of σ (>1) occurs at the point $x = 0$, then the impedance at this point is resistive and is given by σZ_0 or by Z_0/σ respectively. The impedance at the end of the line ($x = l$) can be deduced if the electrical length and the attenuation of the line are known. The equipment described in this paper provides facilities for the measurement of these three quantities. The standing-wave ratio and the attenuation are measured on the c.r.o. as described in previous sections, but if high accuracy is desired, the characteristics of the amplifiers can be eliminated by the use of a substitution method of voltage measurement. The electrical length of the line depends fundamentally on a measurement of frequency, a quantity which can be measured accurately by a crystal.

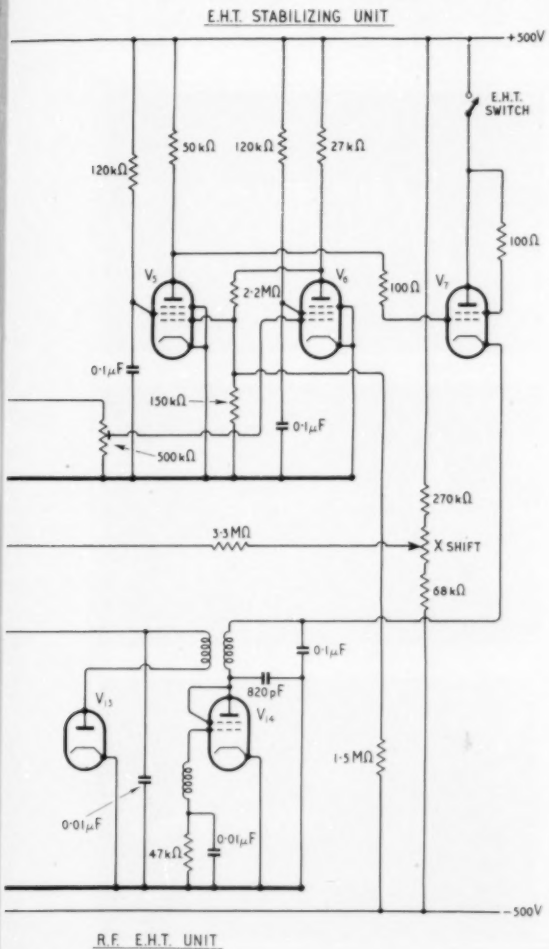

The method effectively provides information about the maxima, minima and s.w.r. on a line without slotting the line. This is an advantage over the conventional sliding-probe method, but there are the disadvantages that the line is long and it is not easy to measure over a narrow continuous range of frequencies (the line length would have to be changed). The present intention is to measure some impedances with the present equipment and to compare the results with those obtained using a commercially-available v.h.f. impedance bridge, the object being to demonstrate the reliability of the equipment. The s.w.r. at $x = 0$ and the cable attenuation have been measured directly from the oscilloscope display and an 8-in diameter circle diagram has been used in computation. It is, however, necessary to measure frequency with greater accuracy than is possible from the face of the oscilloscope. First, the approximate frequency at which, say, a minimum occurs can be read off the display which is, as has been mentioned before, self-calibrating. Frequency sweeping is then stopped and by manual tuning of the oscillator the spot on the c.r.o. is set accurately on the position of the minimum nearest the approximate frequency. The oscillator frequency is now accurately measured by a crystal wavemeter. The electrical length of the cable is deduced as follows from frequency measurements. The cable is carefully shorted at the load end and a frequency f_1 at which a minimum occurs at $x = 0$ is measured by the above method. At this frequency there is an integral number of half-wavelengths in the line and the value of the integer is obtained from a measurement of the physical length of the line and a knowledge of the dielectric in the line. The dielectric is polyethylene giving a phase velocity in the line of $2c/3$. The frequency f_1 has been measured to be 99·165 Mc/s so that the half-wavelength in the line is 1·008 m. Since the physical length is 10 m, the number of half-wavelengths is $10/1{\cdot}008 = 10$ to the nearest integer. The phase velocity and the physical length need

be known only with sufficient accuracy to define the nearest integer, in this case 10. It is now known that the length of the line is 1,800° at 99·165 Mc/s.

The electrical length at any frequency f_2 is given by the expression $\frac{1800}{99{\cdot}165} f_2$.

Here f_2 is the frequency at which a minimum occurs at $x = 0$ when the load is connected.

The number of half-wavelengths in the line at f_2

$$= \frac{10}{99{\cdot}165} f_2$$
$$= K f_2$$

where $K = 0{\cdot}10084$

This will in general be a non-integral number. The fractional portion represents the distance in half-wavelengths between the load and the voltage minimum nearest to the load.

As an example, $f_2 = 108{\cdot}49$ Mc/s.

$\therefore$ number of half-wavelengths in the line
$= 0{\cdot}10084 \times 108{\cdot}49$
$= 10{\cdot}94$

$\therefore$ electrical length between the load and the minimum nearest to the load

$$= \frac{0{\cdot}94}{2} = 0{\cdot}47 \text{ wavelength.}$$

From the display the v.s.w.r. = 2:1 and the attenuation is 0·4 db. Using a circle diagram and taking the Z_0 of the cable to be 70 ohms it is found that the load is $(36 + 10j)$ ohms.

The following table presents for comparison some impedances measured by the above method

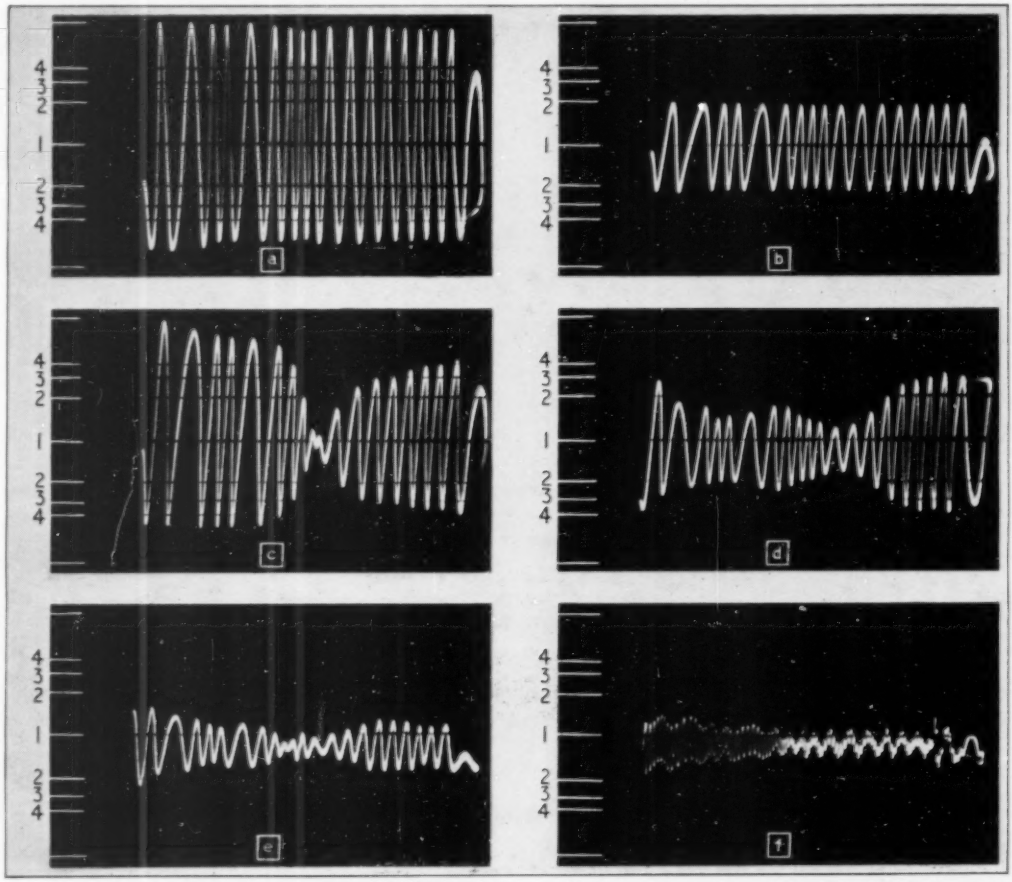

Fig. 6. *Some examples of display with the apparatus. The conditions are explained in the text; the vertical scales are of voltage standing-wave ratios and the horizontal sweep represents frequency.*

and by a commercially-available v.h.f. bridge (by Wayne-Kerr Ltd.).

It is repeated that the intention here is not to indicate the achievable accuracy of the method but to demonstrate by the agreement of results that the present equipment is operating on a sound basis.

Standing-Wave Ratio (to unity)	Frequency (Mc/s)	Impedance by above method (ohms)	Impedance by v.h.f. bridge (ohms)
2	108·49	$36 + 10j$	$36 + 11j$
2	131·91	$67 - 57j$	$69 - 55j$
4	155·43	$42 + 99j$	$42 + 102j$
4	193·72	$261 + 29j$	$250 + 35j$
4	216·43	$18 + 43j$	$23 + 35j$

It can be seen from the above table that the accuracy of impedance measurement is good but it falls off as the s.w.r. and the frequency increase.

Acknowledgment

This paper is published by permission of the Chief Scientist, Ministry of Supply.

REFERENCES

[1] S. A. Schelkunoff, "Advanced Antenna Theory", Wiley & Sons, 1952.
[2] C. H. Papas and R. King, "Input Impedance of Wide-Angle Conical Antennas Fed by a Coaxial Line", *Proc. Inst. Radio Engrs*, November 1949.
[3] L. L. Libby, "Frequency Scanning V.H.F. Impedance Meter", *Electronics*, June 1948.
[4] Handbook of Scientific Instruments and Apparatus, 1951, p. 220 (35th Physical Society's Exhibition).
[5] F. M. Colebrook, "Transmission Line Theory", *Wireless Engineer*, April 1944.
[6] A. H. Brown and H. M. Stanier, "Recent Developments on V.H.F. Ground Communication Aerials for Short Distances", *J. Instn elect. Engrs*, Vol. 94, Part IIIA, p. 636.
[7] A. G. Kandoian, "Three New Antenna Types and their Application", *Proc. Inst. Radio Engrs*, February 1946.

SERIES RESONANT CIRCUIT THEORY

By A. J. Lyon, M.A.

SUMMARY.—The resonance properties of a simple series L, R, C circuit may be affected (a) in the case of frequency tuning, by the dependence of R on frequency and (b) in the case of capacitance tuning, by the presence of capacitor losses or of coil self-capacitance. In view of the importance of such circuits in theory and in practical measurements the fractional errors introduced by such effects (at current resonance) have been calculated and are found to be: (1) in tuning capacitance, α/Q^2, (2) in resonant frequency, $\alpha/2Q^2$, (3) in maximum current, $\alpha^2/2Q^2$, (4) in bandwidth or selectivity, α^2/Q^2. The factor α is likely to be of order unity for frequency tuning but more usually of order 1/10 for capacitance tuning. These results indicate the conditions under which the effects in question are negligible. Similar results apply to other cases of resonance.

Introduction

WHEN we endeavour to construct the simple lumped-constant series-resonant circuit shown in Fig. 1(a), we find that, when we take account of the self-capacitance C_0 of the coil, the leakage conductance G representing capacitor losses and the resistance of meter and leads R_x, the actual circuit becomes, for example, as shown in Fig. 1(b). According to elementary circuit theory[1] the two circuits are approximately equivalent if

$$R = R_0 + R_x C_t^2/C^2 + G/\omega^2 C^2 = R_0 + \delta R, \text{ say} \quad \ldots \quad (1)$$

and

$$C = C_t + C_0 \ldots \quad \ldots \quad (2)$$

provided that $R_x \ll 1/\omega\sqrt{C_0 C_t}$. The total current is then given by

$$I^2 = \frac{E^2}{R^2 + (\omega L - 1/\omega C)^2}. \quad (3)$$

R, however, is not a constant but is a function both of frequency (since all losses may be expected to increase with frequency) and also, by equation (1), of the tuning capacitance C_t. Hence the condition of maximum current will differ from that of zero reactance by a small amount whether the circuit is tuned to resonance by varying ω or by varying C_t. Moreover the measured current I_m, in the circuit arrangement of Fig. 1(b), is not equal to the total current I but is less than this by the amount of current flowing in

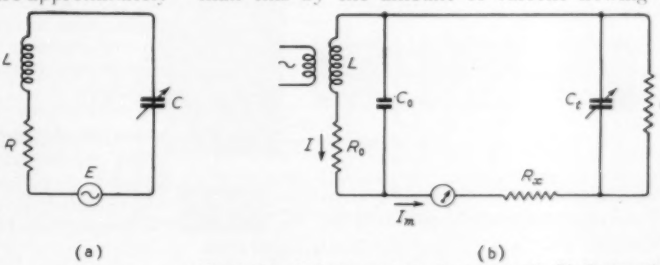

Fig. 1. (a) *A simple series-resonant circuit; (b) the practical form of (a), including self-capacitance and stray circuit losses.*

MS accepted by the Editor, May 1954

the self-capacitance C_0. If $R_x \ll 1/\omega C$ we may write, approximately,

$$I_m = IC_t/C \quad .. \quad .. \quad .. \quad (4)$$

and it is clear that, at any rate for capacitance tuning, the condition for maximum I is not identical with that for maximum I_m.

Such deviations from 'true' resonance will of course affect the bandwidth and selectivity of the circuit, and will introduce errors into any measurements based on the formulae of simple resonance theory. Although we may expect that, at least in a high-Q circuit, these errors will be small, nevertheless, in view of the basic character of the circuit both in theory and practice, it seems worth while to calculate their magnitude, and hence determine the precise conditions under which they are negligible. For simplicity, attention has been concentrated on series current resonance and one particular, though typical, circuit arrangement, but it is clear that similar considerations will apply to other types of resonance and other practical variations of the circuit.

Calculation of the Errors

The condition for maximum current, obtained by differentiating equation (3), or equation (4), with respect to C_t or ω—whichever is the tuning variable— has in all cases the approximate form

$$\omega^2 LC = 1 - \alpha/Q^2 \quad .. \quad .. \quad .. \quad (5)$$

where $Q = \omega L/R$, the *circuit* Q-factor.

When ω is the variable, and we assume that the total current I is measured,

$$\alpha = \tfrac{1}{2}\frac{\omega}{R}\frac{dR}{d\omega} = \alpha_1, \text{ say.} \quad .. \quad .. \quad (6)$$

If R is proportional to ω^n, $\alpha_1 = n/2$ and therefore will usually lie between say $\frac{1}{4}$ and 1.

When C is the variable

$$\alpha = \frac{C}{R}\frac{dR}{dC} = \alpha_2, \text{ say.} \quad .. \quad .. \quad (7)$$

dR/dC can be estimated from equation (1). If the second term is negligible and $G = \tau\omega C$, where τ is the power factor,

$$\alpha_2 = -\delta R/R \quad .. \quad .. \quad .. \quad (8)$$

and this is appreciable only where capacitor losses are comparable with coil losses. If G is negligible

$$\alpha_2 = 2\frac{C_0}{C_t}\frac{\delta R}{R} \quad .. \quad .. \quad .. \quad (9)$$

and this is small unless the self-capacitance C_0 is comparable with the tuning capacitance C_t.

To estimate the effect of measuring I_m instead of the total current I we may differentiate equation (4) assuming now that R is constant. We then find

$$\alpha = -C_0/C_t = \alpha_3 \quad .. \quad .. \quad .. \quad (10)$$

and again this is large only if C_0 and C_t are of similar magnitude.

Roughly speaking, α may be expected to be of order unity for frequency tuning, but will often be of order 1/10 or less for capacitance tuning.

Resonant Current, Bandwidth and Selectivity

According to elementary resonance theory[1], the maximum, or resonant, current is

$$I_r = E/R, \quad .. \quad .. \quad .. \quad .. \quad (11)$$

the bandwidth (i.e., the difference between the frequencies for which $I = I_r/k$) is given by

$$(\omega_1 - \omega_2)/\omega_r = \sqrt{k^2 - 1}/Q, \quad .. \quad (12)$$

ω_r being the resonant frequency, and similarly when C_t is the tuning variable

$$\frac{C_1 - C_2}{C_1 + C_2} = \frac{\sqrt{(k^2 - 1)}}{Q} \quad .. \quad .. \quad (13)$$

Any deviation from true resonance which can be expressed in the form of equation (5) will cause errors in these equations whose magnitude is readily calculated. Equation (11) now becomes

$$I_r = \frac{E}{R}\left\{1 + \frac{\alpha^2}{Q^2}\right\}^{-\frac{1}{2}} \approx \frac{E}{R}\left(1 - \tfrac{1}{2}\frac{\alpha^2}{Q^2}\right). \quad (14)$$

ω_1 and ω_2 now satisfy the equation

$$\frac{\omega_r^2}{\mu\omega^2} = 1 \pm \frac{\omega_r}{\omega}\frac{\sqrt{(\nu k^2 - 1)}}{Q}, \quad .. \quad (15)$$

where $\mu = 1 - \alpha/Q^2$ and $\nu = 1 + \alpha^2/Q^2$, so that

$$\frac{(\omega_1 - \omega_2)}{\omega_r} = \frac{\sqrt{(\nu k^2 - 1)}}{Q} \quad .. \quad (16)$$

$$\approx (1 + \alpha^2/Q^2)/Q \quad .. \quad .. \quad (16a)$$

when $k^2 = 2$.

Similarly C_1 and C_2 now satisfy

$$C_r/\mu C = 1 \pm \sqrt{(\nu k^2 - 1)}/Q \quad .. \quad .. \quad (17)$$

and so

$$\frac{C_1 - C_2}{C_1 + C_2} = \frac{\sqrt{(\nu k^2 - 1)}}{Q} \quad .. \quad .. \quad (18)$$

$$\approx (1 + \alpha^2/Q^2)/Q \quad .. \quad (18a)$$

when $k^2 = 2$.

It will be noted that for $\alpha = 1$ equations (12) and (13), which are sometimes used for measurements, remain accurate to within 1% provided $Q > 10$, but if $\alpha = 1/10$, as may be the case with capacitance tuning, the error does not exceed 1% unless $Q < 1$.

Acknowledgment

The writer wishes to thank particularly Sir Edward Appleton, F.R.S., Principal of Edinburgh University, for his interest and advice in the preparation of this note.

REFERENCE

[1]Hartshorn, L. "Radio-Frequency Measurements by Bridge and Resonance Methods", Chapman and Hall, 1940.

LOW-FREQUENCY DIRECTION FINDER

Twin-Channel Cathode-Ray Design

By C. Clarke, A.M.I.E.E. and V. A. W. Harrison

(Official Communication from D.S.I.R. Radio Research Station, Slough)

SUMMARY.—The instrument described is a simplified and improved version of a type of direction finder in current operational use for locating thunderstorms. Signals from crossed-loop aerials, one metre square, are amplified in matched amplifiers, tuned to 10 kc/s, and applied to the cathode-ray tube. In observations on atmospherics the tube is brilliance-modulated by a pulse derived from the atmospheric. When a network of stations, linked by telephones, is used, the atmospheric received at a selected station also causes an audible pulse to be passed over the telephone lines; this facility improves the co-ordination of the observations.

If required, a sense amplifier may be incorporated to remove the 180° ambiguity which normally occurs in the bearings; the aerial for this unit is a short vertical rod.

1. Introduction

FOR the location of thunderstorms the British Meteorological Office uses a network of four stations equipped with twin-channel cathode-ray direction finders operating at frequencies near 10 kc/s. The design of the instruments and the observation technique have been described in published papers[1,2,3].

The instruments were designed partly to facilitate investigation of various types of error, and they were therefore made to provide the highest possible accuracy and to tune continuously over a frequency range 10–30 kc/s. The heterodyne principle was used to convert the signal frequencies to a fixed output frequency of 50 kc/s to investigate techniques of brilliance modulation. In practice, these instruments were almost invariably used at a frequency of about 10 kc/s; the possible advantages of a high output frequency were not realized and the high inherent accuracy of the equipment could not be fully used, owing to external factors such as imperfections of the site.

In designing new instruments it was therefore decided to use signal-frequency amplification only, to restrict the frequency range and if necessary to accept a rather lower standard of accuracy. It was considered that with these changes and with other improvements in design an equipment could be built which would be simpler to operate, cheaper to manufacture, suitable for use at tropical stations and sufficiently small and light for use in the vehicle. An experimental equipment has been built in which these objects have been achieved, and a number of similar models have been made commercially.

2. General Features

A brief description of the new instrument has already been published[4]. In the electrical design it differs from the previous model in the following respects:

(a) The amplifiers are of tuned-radio-frequency design and can be tuned only over small pre-selected bands. These changes resulted in a substantial simplification in construction and operation.

(b) Push-pull operation is restricted to the output stages of the amplifiers, enabling the number of valves to be reduced.

(c) The test signal used in the alignment of the amplifiers is injected across a small resistor in series with the aerials instead of across the aerials themselves.

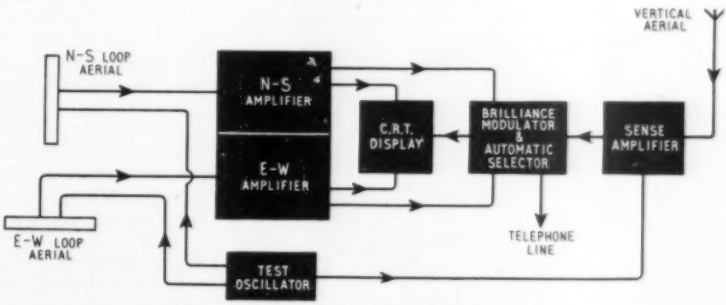

Fig. 1. *Block diagram of the direction finder.*

MS accepted by the Editor, June 1954

(d) An automatic selector is incorporated for use in the co-ordination of the observations at the two or more stations of a network. The reception of an atmospheric having an amplitude above a preset threshold level at the control station causes a short audible pulse to be passed over the intercommunications system to the other stations.

(e) The design includes a sense amplifier, as an optional feature.

In other respects there is no basic change in the electrical design. The simplifications which have been introduced have enabled the size and weight of the equipment to be considerably reduced, and all units other than the aerials are contained in a single console. A block diagram is shown in Fig. 1 and a photograph of the console in Fig. 2. The upper chassis contains the twin amplifiers, the centre chassis the test oscillator, display unit, brilliance modulator and automatic selector, and the lower chassis contains the power units. The upper and lower units can be withdrawn on telescopic runners for inspection, and access to all units can be gained from the rear of the console.

The telephone lines for communication with the other stations of a network terminate in two jacks, into which headsets may be plugged.

A heater and fan are fitted for use under adverse climatic conditions; for prolonged use in tropical climates it would probably be necessary to install the equipment in an air-conditioned building.

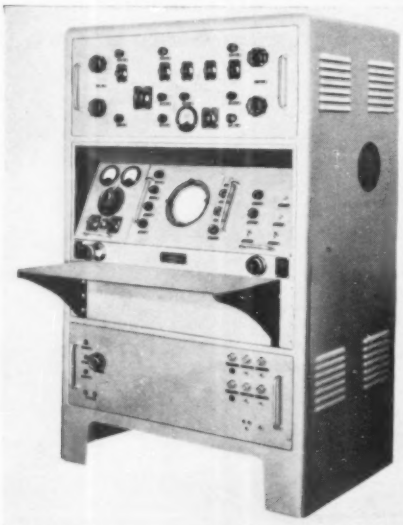

Courtesy Cinema-Television Ltd.

Fig. 2. *Photograph of the direction finder; the height is 54 in., the width 36 in. and the depth 24 in.*

The equipment is designed for operation from a 230-V, 50-c/s supply and the power unit contains a variable-ratio transformer to permit operation from voltages in the range 200–250V.

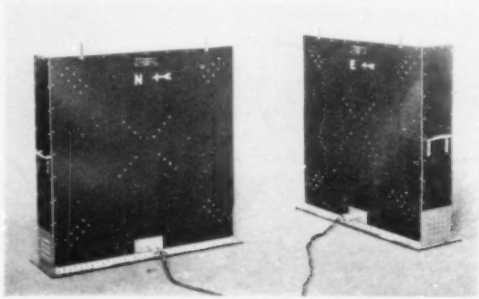

Courtesy Cinema-Television Ltd.

Fig. 3. *The loop aerials are 36 in. square and are mounted in T-formation.*

3. Detailed Description

3.1. *Aerial System*

The loop aerials, shown in Fig. 3, are about one metre square and are arranged in T-formation in north–south and east–west directions. Each loop consists of 300 turns, in two layers, with a total inductance of 100 mH; it is centre-tapped to earth and on either side of the earth-connection a 10-ohm wire-wound resistor is connected in series with the loop. The test signal is injected across one resistor and the other is included to preserve the electrical balance of the system, which helps to minimize antenna effect and unwanted pick-up on the feeders. The inductances of the two halves of each loop differ by less than 0·5 % and the two loops are matched to this accuracy.

The windings are completely enclosed by insulating material, for mechanical protection. This covering also gives some protection against the weather, although the aerials are not intended to withstand prolonged exposure.

Braided concentric cables are used to connect the aerials to the amplifiers and test oscillator; the normal length of the cables is 12 metres but this may be extended to 30 metres if required.

To minimize mutual inductance between the aerials they are operated at least two metres apart between centres and carefully adjusted in position. For mobile work they are bolted to a framework which ensures that they are always in their correct relative positions.

3.2. *Amplifiers*

Each amplifier consists of a tuned cathode-follower input stage, two resistance-capacitance coupled amplifying stages, a phase-splitter and a push-pull output stage. The circuit is shown in

simplified form in Fig. 4. The instruments are designed for the reception of narrow bands of frequencies centred on 10 kc/s and 16 kc/s and the main function of the variable capacitors is to match the two amplifiers in respect of the phase shift of the amplified signal. The required band is selected by switches at the rear of the chassis which introduce fixed capacitors across the aerial and output tuned circuits. Spare switch positions are provided to enable other bands of frequencies in the range 8 to 16 kc/s to be used, if required, by the insertion of capacitors. The equipment may be modified for use at frequencies up to about 38 kc/s by using half the turns of the loops and removing fixed capacitors in the test oscillator to increase its tuning range.

The cathode-follower stage is linear for c.w. input signals up to 15 V r.m.s. The low-resistance attenuator in the cathode load introduces a total attenuation of 72 db in steps of 3 db. The output stage and transformer provide up to 1,200 V peak-to-peak at the plates of the cathode-ray tube without significant departure from linear operation; an output of 400 V is sufficient to provide a full-scale trace.

Considerable difficulty was experienced in the design of an output stage and transformer which would be linear in operation and which would not introduce undesired coupling to earlier stages or between the two amplifiers. To reduce the external field it was found necessary to use a heavily-screened dust-cored transformer with a low-Q secondary.

The bandwidth of the amplifiers must be sufficiently small to avoid interference from transmitters. However, it has been shown[5] that small bandwidths may lead to errors due to interference between successive atmospherics, so a compromise is necessary. A bandwidth of 300 c/s between half-power points has been used so far, but in situations where station interference is not serious, a wider bandwidth would be advisable.

Means are provided for equalizing phase-shifts, bandwidths and gains of the amplifiers so that their overall response curves are identical. Equal voltages from the test oscillator are applied across the small resistors in the loops and matching adjustments are made stage by stage so that the trace is a straight line at 45° to the axes of the c.r.t. plates. For this procedure a switch with four positions is provided at each stage to give (i) normal operation with the amplifiers operating independently; (ii) coupled operation with the grids of the corresponding stages connected; (iii) N–S trace only, and (iv) E–W trace only.

The phase characteristics and bandwidths of the tuned circuits are equalized by means of the tuning controls and by variable resistors connected across the tuned circuits. Further controls are used to equalize the phase-shifts in the RC stages. The gains of the two amplifiers are matched by differential variation of the bias voltages applied to the output and RC stages.

The amplifiers for the two channels are constructed symmetrically above and below a central horizontal panel in the chassis and the attenuators are ganged for operation by a single control. The front panel also carries a meter and an associated switch to enable voltages and currents at various points in the amplifiers to be measured.

Valves are mounted externally in a horizontal position on a vertical panel at the rear of the

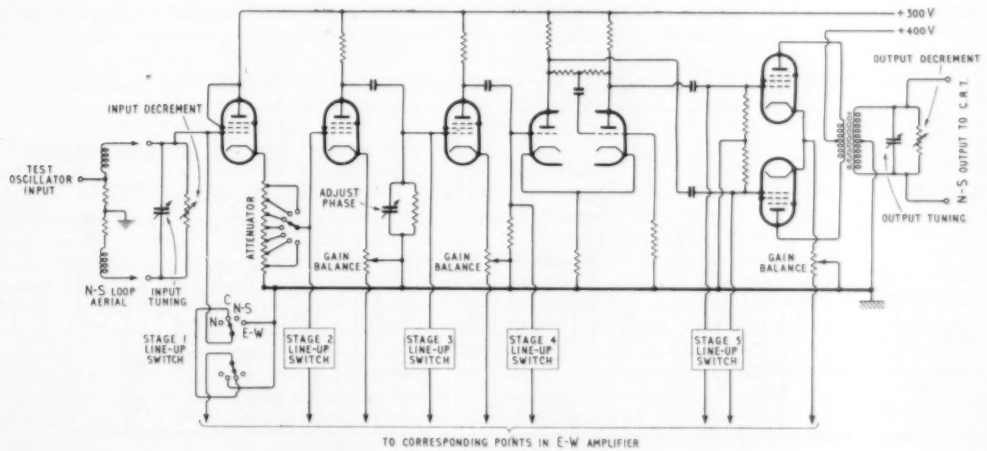

Fig. 4. *Simplified circuit diagram of one of the amplifiers.*

chassis; drift of the tuned circuits due to thermal changes is thus minimized.

3.3. *Display Unit*

Bearings are displayed on a 7-in. compass-type cathode-ray tube and are measured by means of a cursor assembly. Ideally each trace appears as a diametral line along which an engraved line on the Perspex cursor is set. The bearing is then read on a Perspex scale in which the cursor rotates in three bearings. The engravings are plate-lit by four lamps mounted in holes on the stator, and the brightness may be varied.

The cathode-ray tube has a green long-persistance screen and is of a type with the deflection plates orthogonal to within $\frac{1}{4}°$. The circuit of the display unit is mainly conventional, but neutralizing capacitors are provided to eliminate errors due to unbalanced capacitive coupling between the plates.

The display unit is designed with the minimum of projections on the front panel to simplify the mounting of a camera without removing the cursor assembly. The type of camera normally used holds 60 metres of 35-mm film which can be motor driven at speeds up to 40m/min; a speed of 20 cm/min is suitable for the routine location of thunderstorms. These facilities have been used extensively for research purposes, for which it is often necessary to obtain a permanent record of large numbers of atmospherics, including those with small amplitudes.

Records have been obtained over a period of 24 hours with the instrument unattended. During such operations timing signals may be recorded along the edge of the film by means of either a neon lamp mounted in the camera or a small auxiliary cathode-ray tube, and signals from the test oscillator are applied automatically, at intervals, to check the alignment of the circuits.

3.4. *Brilliance Modulator and Automatic Selector*

In normal operation, bearings are taken only on atmospherics with large amplitudes, and the much greater number of smaller atmospherics, if displayed on the tube would distract the observer. The tube is, therefore, biased to cut-off and a brilliance modulator is triggered by atmospherics having amplitudes greater than a predetermined level. This system enables a high final brilliance to be used, which increases the persistence of the trace and makes the bearings easier to read. If the automatic selector is used atmospherics which trigger the brilliance modulator also operate the selector.

The circuits of these units are shown in Fig. 5. Since the brilliance modulator must operate with atmospherics from all directions the trigger signal is derived from the voltages from both amplifiers, combined in phase-quadrature. Unidirectional pulses, 20 msec long and of controllable amplitude, are derived from the first multivibrator and are used to modulate the brilliance of the cathode-ray tube.

When the selector is in use at any one station the length of the pulse from the first multivibrator is automatically increased to 100 msec and by means of relay A a short audible pulse of predetermined amplitude is passed over the communications system to the other stations of the network. The second multivibrator then operates and by means of relay B, introduces a quiescent period, variable in the range 3 to 10 seconds, during which no further audible pulses can be transmitted. The quiescent period is introduced to enable the bearings to be recorded or passed to the control station; the traces are still visible, however, and any of particular interest can be selected verbally.

The automatic selection facility was developed in the first instance for use in a research pro-

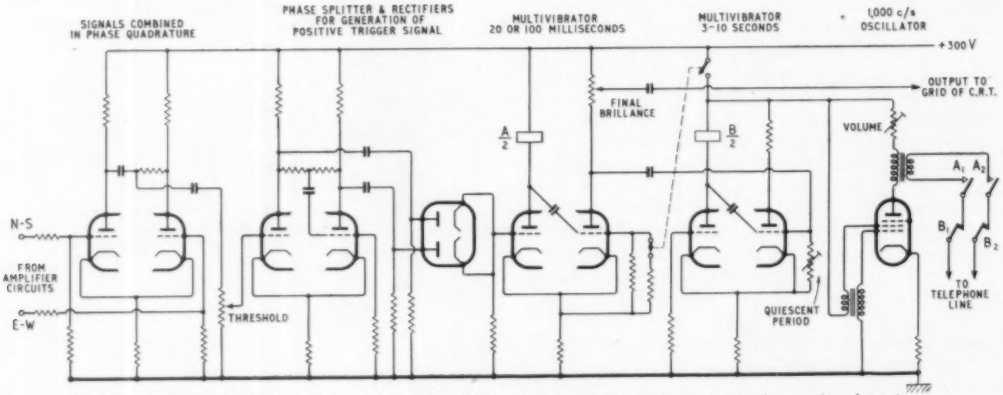

Fig. 5. *Brilliance modulator and automatic selector circuits: relay contacts shown in no-signal position.*

gramme involving the co-ordination of direction-finding observations with the recording of waveforms of atmospherics. It was subsequently found to be of value in co-ordinating the observations of bearings on a routine basis[6] and was, therefore, made an integral part of the new design.

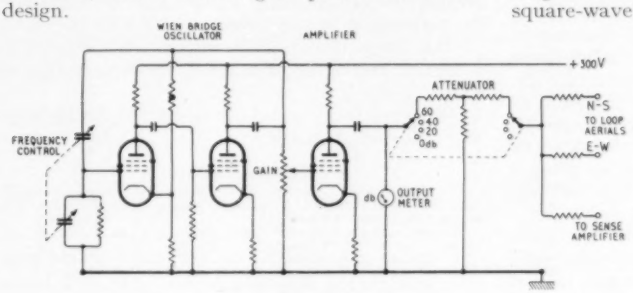

Fig. 6 (*above*). *Test oscillator.*

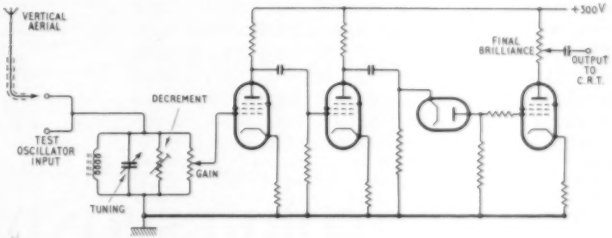

Fig. 7 (*right.*) *Sense amplifier.*

3.5. *Test Oscillator*

The test oscillator provides an unmodulated signal which is used in the alignment of the equipment, in performance checks and in the location of faults. The circuit is shown in Fig. 6.

A resistance-capacitance Wien bridge oscillator[7] with variable capacitance is used, to minimize the need for screening. It carries the only frequency scale on the equipment (7–20 kc/s). The output is sufficient to provide a full-scale trace with the amplifier attenuators set for minimum gain, and can be varied by means of stepped and continuously variable attenuators. Changes in output level introduced by the variable control are indicated on a meter.

3.6. *Sense Amplifier*

A sense amplifier is used to modulate the brilliance of the cathode-ray tube at signal frequency so that bearings are indicated without ambiguity by radial traces. It has been developed mainly for research applications and is not normally required in the operation of a network where the 180° uncertainty in the bearings is resolved in the plotting operation. It might be needed, however, in parts of the world subject to intense local thunderstorms, as a means of simplifying the display and improving the identification of particular atmospherics at several stations. It is therefore an optional feature and can be mounted on the brilliance modulator chassis.

The amplifier, the circuit of which is shown in Fig. 7, is used with a vertical aerial, six metres high, to which it is connected by a screened cable; it has a tuned input circuit, two resistance-capacitance-coupled amplifying stages and an output stage which, by a limiting process, produces square-wave signals for modulating the cathode-ray tube. The bandwidth is the same as that of the main amplifiers.

To produce a radial trace the phase of the output voltage from the sense amplifier must be correctly related to that of the deflection voltages. The adjustment is made by slight variation of the sense amplifier tuning.

4. Performance and Applications

With the amplifiers operated at maximum gain a c.w. field of 200 μV/m r.m.s. produces a full-scale (10 cm) trace. In practice this means that atmospherics can be recorded from sources at distances of several thousand kilometres; when baselines of the order of 500 km are used the useful range of operation is limited not by lack of sensitivity but by bearing errors.

The amplifiers are linear in operation for output voltages up to three times that giving a full-scale trace. Within these limits errors on vertically-polarized signals are less than 1°. A further error up to 1° may occur if the instrument is unattended for a period of several hours after a warm-up period of five minutes and subsequent alignment.

In normal use, the accuracy to which thunderstorms may be located is limited by site-errors, polarization errors and possibly by errors due to atmospherics occurring almost simultaneously. These limitations have been discussed fully elsewhere[5,8], and it has been shown that, in daytime, with a four-station network on 500-km baselines, accurate location is limited to about 1,500 km, although useful indications can be obtained at greater distances. At night, accuracy is lower due to an increase in polarization errors.

An instrument of the new design has been used for investigating the errors. For this purpose it was installed in a Meteorological Office van, with radio-communication equipment, petrol-electric generators and a plotting chart. The assembly served as a self-contained mobile station and has been used at some of the established sites and at other temporary sites. By operating the mobile station on sites adjacent to the fixed stations and comparing observations made on atmospherics, various causes of large systematic errors, such as hills and buried cables have been investigated[5,8]. The sensing facility is particularly valuable in this work, since it avoids the necessity for using a network of stations for removing the bearing ambiguities.

Photographic recording has been used experimentally in the location of thunderstorms but, for routine work the technical advantages do not generally justify the additional cost and the time required for processing and analysing the film. The facilities for recording over long periods with the instrument unattended have, however, been used extensively to record the diurnal variations in the bearing of the Rugby GBR transmissions on 16 kc/s by using the mobile station at various sites.

Acknowledgments

The instrument described above was developed for the Meteorological Office by the Radio Research Organization. The paper is published by permission of the Director of Radio Research of the Department of Scientific and Industrial Research and of the Director of the Meteorological Office.

The work was carried out under the supervision of F. Horner, D.S.I.R.

REFERENCES

[1] F. Adcock and C. Clarke, "The Location of Thunderstorms by Radio Direction Finding", *J. Instn elect. Engrs*, 1947, Part III, Vol. 94, pp. 118–125.

[2] C. V. Ockenden, "Sferics", *Met. Mag. Lond.*, 1947, Vol. 76, pp. 78–84.

[3] C. Clarke, "A Meteorological Direction Finder", *Wireless World*, 1949, Vol. 55, No. 10 (Overseas Edition), S.12.

[4] F. Horner, "A New Design of Radio Direction Finder for locating Thunderstorms", *Met. Mag. Lond.*, 1954, Vol. 83, pp. 187–188.

[5] F. Horner, "The Accuracy of the Location of Sources of Atmospherics by Radio Direction Finding," *Proc. Instn elect. Engrs.* 1954, Part III, Vol. 101, pp. 383–390.

[6] A. L. Maidens, "An Automatic Selecting Device for 'Sferics' Observations", *Met. Mag. Lond.*, 1951, Vol. 80, pp. 281–282.

[7] M. G. Scroggie, "Audio Signal Generator", *Wireless World*, 1949, Vol. 55, No. 8, pp. 294–297; No. 9, pp. 331–334.

[8] F. Horner, "Radio Direction Finding: Influence of Buried Conductors on Bearings", *Wireless Engineer*, 1953, Vol. 30, pp. 187–191.

CORRESPONDENCE

Letters to the Editor on technical subjects are always welcome. In publishing such communications the Editors do not necessarily endorse any technical or general statements which they may contain.

Nyquist's Criterion for Multiple-Loop Feedback Circuits

SIR,—In a recent paper[1] Nyquist's Criterion for single-loop feedback circuits was derived without the use of contour integration in the complex plane. It may interest your readers that an alternative way exists based on conformal transformation. The alternative method can be made to include multiple-loop feedback circuits. So far as I am aware, the method has not been published yet coherently, though it is very useful and illustrates clearly the basic principles underlying Nyquist's Criterion.

Let the usual single-loop feedback amplifier of amplifier portion gain A and feedback network gain β be opened at the grid of any valve within the loop. Let a damped or growing voltage signal equal to the real part of $e = E\epsilon^{pt}$ where $p/j = \mu/j + \omega$ is the complex angular frequency, be applied between cathode and grid of the opened valve (grid on higher potential). Then a voltage equal to $Te = -\beta Ae$ appears between the 'grid node', defined as the point of the network from which the grid was disconnected, and the cathode of the valve (cathode on higher potential). Further voltage equal to $Fe = (1 - \beta A)e$ appears between the 'grid node' and the grid (grid on higher potential). T and F are Bode's return ratio and return difference respectively[2]. They are the ratio of two polynomials in p. Without changing anything in the voltage and current conditions in the network a damped or growing voltage signal equal to the real part of $(1 + T)\,e = Fe$ could be applied between the 'grid node' and the grid of the opened valve, in lieu of the above signal between the grid and the cathode. Hence, self-excited currents and voltages in the normal connection of the network (i.e., with grid node and grid short-circuited) can occur at values of p for which $(1 + T) = F = 0$. If zeros of F occur for positive real parts of p, growing oscillations set in from a small disturbance, or the network is unstable. The reasoning described is always valid also for multiple-loop feedback circuits, and also when A and β cannot be defined precisely on their own. A convenient way of computing $T(p)$ or $F(p)$ for multiple-loop feedback circuits is by the use of the return difference matrix[3].

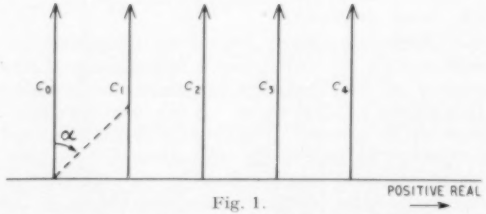

Fig. 1.

Let Fig. 1 be the upper ($p = \mu + j\omega$) half-plane in which are drawn directed vertical straight lines c_0, c_1, c_2, etc. representing constant values of μ and values of ω increasing from 0 to $+\infty$. Let the directed contours C_0, C_1, C_2, etc. (Figs. 2 and 3) correspond in the $F(p)$ or $T(p)$-plane to the contours c_0, c_1, c_2, etc. in the p-plane, if $F(p)$ or $T(p)$ is used as an analytical function of p for a conformal transformation. Figs. 2 and 3 refer to

two different networks selected as examples. No imaginary axes are drawn in order to keep the figures more universal for the discussion. The equality of corresponding angles α (Figs. 1–3) in a conformal transformation requires that if the contour c_1 in Fig. 1 is on the right-hand side of the directed contour c_0, the contour C_1 in Figs. 2 and 3 must be on the right-hand side of the directed contour C_0, etc. Noteworthy features of the changes of the curves C_n in Figs. 2 and 3 that occur when increasing the value of n are:

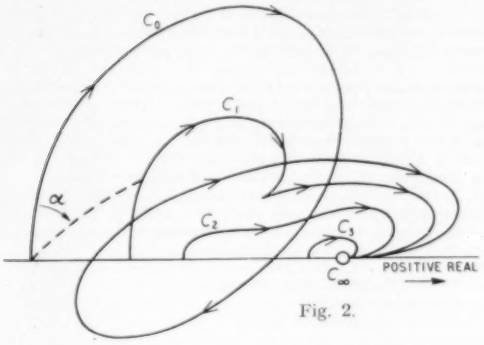

Fig. 2.

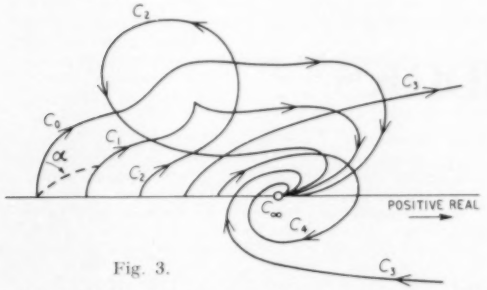

Fig. 3.

(a) A double clockwise loop C_0 in Fig. 2 changes first into a simple clockwise loop C_1 with a cusp on its right-hand side, and later into simple clockwise loops C_2, C_3, etc.

(b) A simple clockwise loop C_0 in Fig. 3 changes first into a simple clockwise loop C_1 with a cusp on its left-hand side, then into a double loop C_2 which is partly clockwise and partly anticlockwise, later into a loop C_3 reaching to infinity, and further into a double clockwise loop C_4.

Any passing of a curve C_n through the critical point (i.e., the origin in the $F(p)$-plane or the point '1' in the $T(p)$-plane) corresponds to instability of the network. Any reaching to infinity of a contour C_n (C_3 in Fig. 3) corresponds to a pole of the function $F(p)$ or $T(p)$. For a very high positive value of μ (i.e., a straight line very far to the right-hand side in Fig. 1) the corresponding curves in Figs. 2 and 3 must be very close to the point C_∞, even if the analytical expression for $F(p)$ or $T(p)$ gives a different value, because unwanted shunt capacitances and series inductances leading to $T(\infty) = 0$ or $F(\infty) = 1$ prevent any transmission through a network at sufficiently high frequencies.

Any of the curves c_n in Fig. 1 can be imagined as the curve for $\mu = 0$. Then the corresponding curve C_n in Figs. 2 and 3 is the Nyquist plot. A study of Figs. 2 and 3 and the consideration that the features (a) and (b) can occur independently several times at different positions lead to the following extension of Nyquist's Criterion, which is a combination of the theorems on pages 149 and 158 of Bode's book:

> "A single- or multiple-loop feedback amplifier is stable if the Nyquist plot for a suitably selected valve does not encircle the critical point in clockwise direction and does encircle it in anti-clockwise direction as many times as there are poles of the return ratio $T(p)$ or return difference $F(p)$ in the right-hand side half plane of p. Otherwise the amplifier is unstable."

L. Tasny-Tschiassny

Electrical Engineering Department,
University of Sydney,
Australia.

5th January 1955.

[1] O. P. D. Cutteridge, "Nyquist's Criterion", *Wireless Engineer*, October, 1954, Vol. 31, p. 274. See also *Wireless Engineer*, November 1954, Vol. 31, p. 293.
[2] H. W. Bode, "Network Analysis and Feedback Amplifier Design" (D. van Nostrand, 1945).
[3] L. Tasny-Tschiassny, "The Return-Difference Matrix in Linear Networks", Monograph No. 60, Institution of Electrical Engineers, London (April 1953).

Optimum Element Spacing of Uniform Broadside Arrays

Sir,—The total power radiated from an array of n elements may be expressed[1] as

$$P_1 = \tfrac{1}{2} \sum_{i=1}^{n} \sum_{j=1}^{n} I_i \; I_j \; R_{ij}$$

where I_i and I_j are the currents in the ith and jth elements respectively, and R_{ij} is the mutual radiation resistance if $i \neq j$, or the radiation self-resistance is $i = j$. In the case where all the array elements are fed with equal and in-phase currents, then $I_i = I_j = I_0$ and we have

$$P_1 = \tfrac{1}{2} \; I_0^2 \sum_{i=1}^{n} \sum_{j=1}^{n} R_{ij}$$

If the elements are identical and are so arranged that they are either collinear with a straight line (collinear array) or co-planar and perpendicular to the straight line joining their centres (curtain array), then the directivity

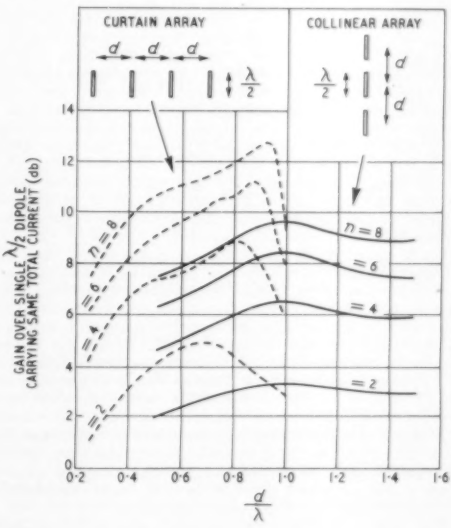

gain of the array over a single element carrying the same total current is given by the ratio

$$G = P_1/P_0$$

where $P_0 = \frac{1}{2}(nI_0)^2 R_{11}$ is the power radiated by the reference element radiator carrying a current of nI_0.

Such gain of the collinear array and the curtain array, each containing n evenly-spaced, thin half-wavelength dipoles, are calculated and plotted against element spacing for $n = 2$, 4, 6 and 8 in the figure.

The results seem to indicate that one wavelength is the optimum spacing for a uniform collinear array irrespective of the number of elements, while the optimum spacing for a uniform curtain array, depends on the number of elements and follows roughly an empirical relation

$$d/\lambda \approx 0{\cdot}6 + \tfrac{1}{2}\log_{10} n$$

The latter seems to be different from the results obtained by Hammond[2] who, using another method of attack, has given a set of curves indicating that three-quarter wavelength is the optimum spacing for a uniform curtain array irrespective of the number of elements.

RICHARD F. H. YANG

Andrew Corporation,
Chicago, U.S.A.
13th January 1955.

[1] S. A. Schelkunoff, H. T. Friis, "Antennas, Theory and Practice", John Wiley & Sons, 1952, p. 162.
[2] P. Hammond, "Power Gain of Curtain Arrays of Aerials", *Wireless Engineer*, 1953, Vol. 30, p. 108.

Diode Rectifiers

SIR,—In his paper on "Shunt-diode Rectifier in Voltage Measurement" (February 1955) Mr. Scroggie mentions some approximate methods of calculating the voltage rectification efficiency when the time-constant RC of the load is finite. An exact solution of this problem was published some years ago (*Wireless Engr*, May 1949, Vol. 26, p. 166). The results were presented in the form of a set of graphs showing the percentage decrease in the rectified voltage produced by making X/R greater than zero. $(X = 1/\omega C)$

Although the problem is not one which lends itself readily to analytical approximation, an empirical formula can easily be obtained from these graphs. This is

$$D = 120\,(X/R)^2\,(R/R_d)^{2/3},$$

where D is the percentage reduction in the rectified voltage due to the finite value of X, and R_d is the diode resistance. This expression is a fair approximation when D lies between 0·5 and 2·0, and for a range of R/R_d from 100 to 1,000. For values of R/R_d between 10 and 100 the accuracy is still sufficient for most design purposes.

In the limiting case where $R_d \to 0$ it can be shown by straightforward methods that $D = 100\pi\,X/R$, provided X/R is small, but very large values of R/R_d are required to make this approximation valid.

A. S. GLADWIN

Dept. of Electrical Engineering,
University of Sheffield.
11th February 1955.

NEW BOOKS

Handbook of Microwave Measurements

Edited by M. WIND and H. RAPAPORT, Vol. 1, pp. 616 + xiii; Vol. 2, pp. 320 + xxi. Polytechnic Institute of Brooklyn, Brooklyn, N.Y., U.S.A.

This 900-page, 2-volume handbook has been prepared by members of the staff of the Polytechnic Institute of Brooklyn under contract for the U.S. Signal Corps Engineering Laboratories, and is addressed to the radio or radar technician. Despite having been prepared primarily for Service use it is almost free from explicit references to specific items of Service equipment, although it is often obvious that it is written with such items very much in mind. For example, in the section on wavemeters it is stated—"The coaxial type covers the range from 450 to 10,500 Mc/s and the circular waveguide (cylindrical cavity) type from about 1,000 to 40,000 Mc/s".

The range is comprehensive and up to date, including sections on such things as measurement of breakdown voltage, spectrum analysis, and measurements on hybrid junctions and directional couplers.

Each type of measurement is subdivided into the different possible methods, and the procedures are given in step-by-step form. Thus, the book tends to resemble a collection of Service instruction manuals and the arrangement results in considerable repetition, rather tiresome when it includes such instructions as—"Turn the 'on/off' switch to the 'on' position and the 'sensitivity' control to the maximum position if either has been included in the equipment". But this is not to be taken as the level of the treatment, for although the information is mainly procedural it is full and accurate. Each chapter includes a useful descriptive and theoretical introduction, but no attempt is made to derive any but the simplest expressions. An excellent feature is the large number of worked calculations from measured data.

The text is confined to Volume 1 and is lithoprinted from typescript; Volume 2 contains the diagrams. This arrangement no doubt aids in keeping down production costs, but two open quarto volumes make an unwieldy handful.

For the technician the book is a useful compendium of microwave measurement methods not readily available elsewhere, but also for the engineer or physicist engaged in measurement it will be a valuable supplement to the more usual theoretical treatments of the subject.

H. R. L. L.

Introductory Circuit Theory

By ERNEST A. GUILLEMIN. Pp. 550 + xxv. Chapman & Hall Ltd., 37 Essex Street, London, W.C.2. Price 68s.

The author is Professor of Electrical Communication at the Massachusetts Institute of Technology and is well known for his work on circuit theory. In his very long preface, he most clearly describes the aim of the book and he points out that it is the first volume of a projected sequence of three or four. It is in this sense that this book is 'introductory'; considering it by itself, most people would classify it as fairly advanced.

It is intended for "a first course in circuits for undergraduate students majoring in electrical engineering or for physics students who need a good orientational background in the subject". The treatment, however, is unorthodox, for the start is not with Kirchhoff's laws, but with network geometry and network variables. This first chapter is full of nodes, branches, trees, meshes, mazes, etc., and it is intended to show how it is possible to choose a necessary and sufficient number of currents or voltages completely to describe the behaviour of any network. This it does in a very systematic and complete manner.

To one who has been brought up on more orthodox lines and has, to some extent, grown up with the subject, this treatment just seems to be creating difficulties for

the beginner. It may be, however, that this impression is wrong for, with the passage of time, one is apt to forget one's initial troubles in learning a subject. It would be an interesting experiment to compare the progress of two similar batches of students taught by the different methods.

What is certain, however, is that the engineer who is already advanced in circuit analysis will find this initial chapter quite difficult, not because of any essential difficulty in the ideas, but because of the unfamiliar nomenclature which must be memorized. This nomenclature is not a new invention of the author's, it is one which has grown up in the U.S.A. in recent years and will be familiar to those who have followed the more advanced publications in circuit theory. To others, however, it makes life difficult, for one has continually to remember that a 'node' is not a point of zero potential, as we have been brought up to believe, but a junction point at which two or more circuit elements may be or are connected. Then, it is hard to keep in mind that a 'branch' is the connection between two nodes and, hence, a circuit element, for most people consider a branch as being some sub-section of the complete network which may be only a single element but is more usually some subsidiary collection of elements.

When one has surmounted the difficulties of the first chapter, the rest of the book is comparatively straightforward. The author explains things most clearly and the only criticism of the presentation that one can make is of the author's tendency to introduce determinants and matrices. They are, however, explained and are not so numerous that they present a serious obstacle to anyone unfamiliar with them.

The approach to steady-state a.c. theory is via the transient response. This is most unusual but the unorthodoxy is, this time, one with which the reviewer fully agrees. As the author says, it does remove some of the difficulties and misconceptions of the ordinary approach, and it is not at all hard.

It is a good point that power relations are kept well to the fore. The complex frequency plane is introduced about half-way through the book and is very clearly explained.

The circuits actually treated in this book are all of fairly simple types and their treatment is mainly in illustration of the methods of analysis. Throughout, this is the end in view, to show how to analyse circuits. The book does this remarkably well and should be invaluable to the serious student. It is not a reference book, as the author himself says, and would not be of much use to the type of 'reader' who wants to dip into it to find a quick answer. W. T. C.

Soft Magnetic Materials for Telecommunication
Edited by C. E. RICHARDS and A. C. LYNCH. Pp. 346 + viii. Pergamon Press Ltd., 242 Marylebone Road, London, N.W.1. Price 63s.

A record of the papers presented at a symposium held at the Post Office Engineering Research Station in April, 1952.

Studio Engineering for Sound Broadcasting
By members of the Engineering Division, British Broadcasting Corporation. Pp. 208. Published, by arrangement with the B.B.C., for *Wireless World* by Iliffe & Sons Ltd., Dorset House, Stamford Street, London, S.E.1. Price 25s.

Selenium
By R. ASHTON, M.A., B.Sc., A.R.I.C., E. G. HILL, B.Sc., and D. NEVILL-JONES, M.A., B.Sc. Pp. 29 + iv. H.M. Stationery Office, Kingsway, London, W.C.2. Price 1s. 6d.

Mass Spectrometry
By A. J. B. ROBERTSON, M.A., Ph.D. Pp. 135. Methuen & Co. Ltd., 36 Essex Street, London, W.C.2. Price 8s. 6d.

Valves for A.F. Amplifiers
By E. RODENHUIS. Pp. 147 + viii. Philips' Technical Library, Popular Series, Cleaver Hume Press Ltd., 31 Wright's Lane, Kensington, London, W.8. Price 10s. 6d.

Radio and Television Engineers' Reference Book
Edited by E. MOLLOY and W. E. PANNETT, A.M.I.E.E. Pp. 1560 + xx. George Newnes Ltd., Southampton Street, London, W.C.2. Price 70s.

Magnetic Alloys and Ferrites
Edited by M. G. SAY, Ph.D., M.Sc., M.I.E.E. Pp. 200. George Newnes Ltd., Southampton Street, London, W.C.2. Price 21s.

Single Sideband for the Radio Amateur
Pp. 176. American Radio Relay League, West Hartford 7, Connecticut, U.S.A. Price $1.75.

Les Fonctions de Bessel (2nd Edition)
By GEORGE GOUDET. Pp. 90. Masson et Cie., 120 Boulevard Saint-Germain, Paris 6e. Price 600 fr.

Exercices et Problèmes de Radioélectricité à l'usage de l'Ingénieur
By G. BASSERAS. Pp. 263. Éditions Eyrolles, 61 Boulevard Saint-Germain, Paris 5e. Price 2250 fr.

Théorie des Réseaux de Kirchhoff
By M. BAYARD. Pp. 408. Éditions de la Revue d'Optique, 165 rue de Sevres, 3 et 5 Boulevard Pasteur, Paris 15e. Price 3200 fr.

British Plastics Year Book 1955 (25th Edition)
A Classified Guide to the Plastics Industry. Pp. 652. Iliffe & Sons Ltd., Dorset House, Stamford Street, London, S.E.1. Price 30s.

Transactions of Chalmers University of Technology
No. 149. "A Theoretical Investigation of the Ionospheric Electron Density Variation during a Solar Eclipse", by O. E. H. Rydbeck and H. Wilhelmsson. Pp. 22. Price Kr. 3.50.

No. 155. "The Interaction between an Obliquely Incident Plane Electromagnetic Wave and an Electron Beam", by Hans Wilhelmsson. Pp. 30. Price Kr. 7.

No. 156. "Electromagnetic Wave Propagation on Helical Conductors imbedded in Dielectric Medium", by Sven Olving. Pp. 14. Price Kr. 3.

No. 157. "Amplification of the Traveling Wave Tube at High Beam Current", by Sven Olving. Pp.10. Price Kr. 3.

The foregoing are all in English and are obtainable from Chalmers Tekniska Högskolas Bibliotek, Göteborg, Sweden.

TECHNICAL LITERATURE

Marconi Instruments 1955 Catalogue of Telecommunication Measuring Equipment and Industrial Electronic Instruments
Pp. 225 + x. Available on request to senior engineers and executives. Marconi Instruments Ltd., St. Albans, Herts.

Mond Carbonyl Iron Powders
Pp. 50. Mond Nickel Co. Ltd., Publicity Department, Thames House, Millbank, London, S.W.1.

Electrical Standards for Research and Industry
Pp. 204. The 1955 catalogue of H. W. Sullivan Ltd., Peckham, London, S.E.15.

Ten Years of Semi-Conducting Materials and Transistors
Pp. 38. A bibliography of the literature compiled by the Research Department of Pye Ltd., Cambridge.

BRITISH STANDARDS

Resin-Cored Solder Wire 'Activated' and 'Non-Activated' (non-corrosive)
B.S.441:1954. Price 3s.

Unified Thread Taps
Addendum to B.S. 949. P.D. 2061 : 1954. Price 7s. 6d.

Fine Resistance Wire for Telecommunication and Similar Purposes
B.S. 1117 : 1955. Price 2s.

Sizes of Manufacturers' Trade and Technical Literature (including recommendations for contents of catalogues)
B.S. 1311 : 1955. Price 2s. 6d.

Basic Climatic and Durability Tests for Components for Radio and Allied Electronic Equipment
B.S. 2011 : 1954. Price 5s.

British Standards Institution, 2 Park Street, London, W.1.

NATIONAL BUREAU OF STANDARDS

Tables of the Gamma Function for Complex Arguments
Applied Mathematics Series 34. Pp. 105. Price $2.
The table gives real and imaginary parts of $\log_e \Gamma(z)$ for $z = x + iy$, $x = 0(\cdot 1)10$, $y = 0(\cdot 1)10$ each to 12 decimals. It also gives $\sin \pi x$, $\cos \pi x$, $\sinh \pi x$ and $\cosh \pi x$ to 15 decimal places or 15 significant figures for $x = 0(\cdot 1)10$.

Tables of Sine and Cosine Integrals for Arguments from 10 to 100.
Applied Mathematics Series 32 (re-issue of Mathematical Tables 13). Pp. 186. Price $2.25.
This table is of $\mathrm{Si}(x)$ and $\mathrm{Ci}(x)$ for $X = 10(\cdot 01)100, 10D$. Auxiliary tables give multiples of $\pi/2$, $(\frac{1}{2}p)(1-p)$, $p(1-p^2)/6$ and $q(1-q^2)/6$ where $p + q = 1$.

Cheyenne Mountain Tropospheric Propagation Experiments
By A. P. Barsis, J. W. Herbstreit and K. O. Hornberg. Circular 554. Pp. 39. Price 30 cents.

Contributions to the Solution of Systems of Linear Equations and the Determination of Eigenvalues
Edited by Olga Taussky. Applied Mathematics Series 39. Pp. 139. Price $2.
National Bureau of Standards. Government Printing Office, Washington 25, D.C., U.S.A.

MEETINGS

I.E.E.

20th April. "A Study of the Long-Term Emission Behaviour of an Oxide Cathode Valve", by G. H. Metson, M.C., Ph.D., M.Sc., B.Sc.(Eng.).
21st April. "Transistor Physics", Kelvin Lecture by W. Shockley, B.Sc., Ph.D.
22nd April. "Technical Training in North-West Germany", discussion to be opened by K. R. Sturley, Ph.D., B.Sc., at 6 o'clock.
2nd May. "A Simple Introduction to Telegraph Codes", informal lecture by H. V. Higgitt.
These meetings will be held at the Institution of Electrical Engineers, Savoy Place, Victoria Embankment, London, W.C.2, and will commence at 5.30, except where otherwise stated.

BRIT.I.R.E.

13th April. "The B.B.C. V.H.F. F.M. Sound Broadcasting Service", discussion to be opened by Dr. K. R. Sturley and F. T. Lett.
27th April. "Suppressed Aerials for the Aircraft H.F. Band", by K. J. Coppin.
These meetings will commence at 6.30 at the London School of Hygiene and Tropical Medicine, Keppel Street, Gower Street, London, W.C.1.

SOCIETY OF INSTRUMENT TECHNOLOGY

26th April. "Magnetic Amplifiers as Industrial and Laboratory Aids", by R. J. Russell-Bates, to be held at Manson House, Portland Place, London, W.1, at 7 o'clock.

STANDARD-FREQUENCY TRANSMISSIONS

(Communication from the National Physical Laboratory)

Values for February 1955

Date 1955 February	Frequency deviation from nominal: parts in 10^8		Lead of MSF impulses on GBR 1000 G.M.T. time signal in milliseconds
	MSF 60 kc/s 1429-1530 G.M.T.	Droitwich 200 kc/s 1030 G.M.T.	
1	−0·7	+4	+61·2
2	−0·6	+1	+60·8
3	−0·6	+2	+60·5
4	−0·5	+2	+59·9
5	−0·5	+2	NM
6	−0·5	+3	NM
7	−0·6	+2	+58·7
8	−0·6	+2	+57·6
9	−0·6	+2	+57·5
10	−0·5	+3	+57·0
11	−0·5	+3	NM
12	NM	+5	NM
13	NM	+5	NM
14	−0·5	+5	+55·1
15	−0·4	+5	+54·7
16	−0·5	+1	+54·3
17	−0·5	+1	+54·0
18	−0·5	+1	+53·7
19	NM	+1	NM
20	−0·5	+1	+52·8
21	−0·5	+2	+53·5
22	−0·5	+2	+51·8
23	−0·5	+2	+51·7
24	−0·5	+3	+51·5
25	−0·4	+2	+51·1
26	NM	+2	NM
27	−0·4	+1	+49·9
28	−0·4	+2	+49·4

The values are based on astronomical data available on 1st March 1955.
The transmitter employed for the 60-kc/s signal is sometimes required for another service.
NM = Not Measured.

a new

STABILISED POWER SUPPLY UNIT FOR PHOTO-MULTIPLIERS

Ediswan now have available a new stabilised power supply unit which has been specially designed to feed Photo-Multipliers. It is particularly suitable as a supply unit for Ediswan Mazda Photo-Multipliers type 27.M1, 27.M2 and 27.M3.

BRIEF SPECIFICATION—Type R.1184

INPUT	OUTPUT	STABILITY	OUTPUT RESISTANCE	RIPPLE
200 – 250 v., 40 – 100 c.p.s.	High stability low ripple D.C. supply variable between 300 and 1,100 volts. Max. current 2 mA. Pos. or neg. may be earthed.	A 10% change in mains input voltage results in a change of less than 0.1% between 1,100 volts and 600 volts output.	Approximately 1,500 ohms.	Less than 0.01% R.M.S.

MOUNTING The Unit is suitable for standard rack mounting or for bench use. Bench Stands are available.

PRICE — £48

Further information is available on request

EDISWAN

RADIO DIVISION · THE EDISON SWAN ELECTRIC COMPANY LIMITED
155 Charing Cross Road, London, W.C.2. *Telephone:* Gerrard 8660. *Telegrams:* Ediswan, Westcent, London
Member of the A.E.I. Group of Companies

SP115

The scientific approach to vibration measurement

WITH the Muirhead-Pametrada Wave Analyser the localization of obscure vibrations can be carried out systematically. Designed specifically for such measurements, this instrument covers a range of 19*-21,000c/s with a frequency accuracy of ±0.5% over most of the range. Its high selectivity enables component frequencies close to one another to be measured; the flat top of the tuning characteristic can be varied to simplify measurements of fluctuating frequencies; and the 1/3 octave filter characteristic enables predominant vibration components to be rapidly located. In almost every branch of engineering there is a use for this novel instrument.

FEATURES

Operates as a tuned band-pass filter — *not* on the heterodyne principle.

Frequency accuracy ±½% over most of range.

High selectivity characteristic for greatest discrimination against adjacent frequencies.

1/3rd octave filter characteristic for noise measurement or rapid localization of principal vibration components.

Band-pass characteristic for measurements when frequency is fluctuating.

Output frequency is that of the selected component and is available for oscilloscope viewing.

**Additional unit extends useful range down to 2c/s.*

MUIRHEAD

PRECISION ELECTRICAL INSTRUMENTS

157

MUIRHEAD & CO. LIMITED · BECKENHAM · KENT · ENGLAND

CARPENTER POLARIZED RELAYS



have these outstanding features

HIGH OPERATIONAL SPEED • HIGH SENSITIVITY
FREEDOM FROM CONTACT REBOUND
NO POSITIONAL ERROR • HIGH CONTACT PRESSURES
EXCEPTIONAL THERMAL STABILITY • EASE OF ADJUSTMENT • ACCURACY OF SIGNAL REPETITION





The Carpenter Polarized Relay will respond to weak, ill-defined or short-duration impulses of differing polarity, or it will follow weak alternating current inputs of high frequencies and so provide a continuously operating symmetrical changeover switch between two different sources. Five basic types are available with a wide range of single and multiple windings. Particulars of the type best suited to your purpose will be gladly supplied if you will send us your circuit details.

Manufactured by the sole licensees

TELEPHONE MANUFACTURING CO. LTD

Contractors to Governments of the British Commonwealth and other Nations

TMC **HOLLINGSWORTH WORKS, DULWICH, LONDON, SE21**

Telephone GIPsy Hill 2211

TWIN NEON INDICATOR LID

gives visual signal of fuse failure

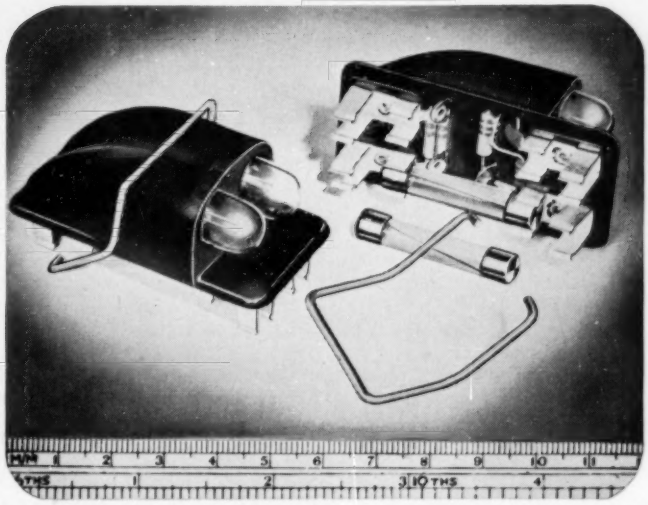

This is fitted with two bayonet cap neon lamps with their associated resistor network, and is intended to carry a pair of 1¼ in. x ¼ in. fuses of the standard glass or H.R.C. types.

The lamps are designed *to go out on a fuse failure;* it has been said that it would be more convenient if the lamps were to light, but engineers designing critical and important equipment will not countenance such an arrangement where there would be no indication in the event of a lamp failure, whereas now the worst that can happen is for an apparent "fuse failure" signal when no such failure has occurred.

The lid is designed to be a *direct replacement* for the lid of our standard twin safety fuseholder, thus providing neon indication without any modification to existing circuit wiring. A replacement safety clip ensures non-reversibility.

Complete boxes with or without back connections can also be supplied if desired under List Nos. L.730 or L.731.

The unit is suitable for Relay Control equipment or any similar gear having a number of fused mains or H.T. circuits, and saves the cost of separate indicator lamps with their attendant wiring and additional space requirements.

The neons will glow satisfactorily over a voltage range of 180/250 V. a.c. (r.m.s.) and 220/250 V. d.c.

L.732 PRICE 16/3

BELLING & LEE LTD
GREAT CAMBRIDGE ROAD, ENFIELD, MIDDX., ENGLAND

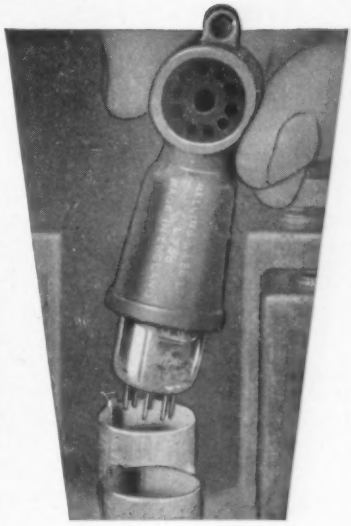

CURE FOR A HEADACHE

Extracts valves, straightens pins —with ease!

This ingenious "Belling-Lee" device does away with *two* little trouble-spots in servicing equipment. First of all, it enables valves to be extracted swiftly and surely from amongst the most tightly-packed components. It is moulded in rubber, and will handle B7G, B8A and B9A valves.

Secondly, a pin straightener for B7G and B9A valves is incorporated in the handle. This is accurately moulded in a hard phenolic material, and will prevent valves or sockets being damaged through trying to force insertion with bent pins.

Simple — but very effective!

List No. L758 — Combined valve extractor and pin straightener.
Price 2/6

THE NEED FOR

Quicker Servicing

THE **B.P.L.** UNIVERSAL TEST SET

Laboratory sensitivity combined with robust construction makes the B.P.L. Universal Test Set the ideal all-purpose set for electricians and radio engineers. Sensitivity is 20,000 ohms per volt for D.C. or A.C. and two ohms ranges allow precise measurement of low resistances. The easy-to-read two-colour dial and mirror scale provide added accuracy. Ranges: A.C./D.C. Volts: 10, 50, 100, 500, 1,000; D.C. Current: 100 μA, 1 mA, 10 mA, 100 mA; Resistance: 0-10,000 ohms (first divn. 10 ohms), 0-1 megohm. List Price: £11. 10. 0 incl. test leads, subject to Trade Discount. We also supply B.P.L. Super Rangers and D.C. Test Sets, Moving Coil and Moving Iron Panel Mounting Meters and a comprehensive range of Measuring Bridges and Electronic Testing instruments. Write today for full details.

BRITISH INSTRUMENT INDUSTRIES EXHIBITION
EARLS COURT LONDON
June 28 - July 9 1955

LEADS TO

British Physical Laboratories

Radlett, HERTS

Telephone: Radlett 5674/5/6

LONDON STOCKIST: M. R. SUPPLIES LTD., 68 New Oxford Street, W.C.1

dmBP3

A new book of great interest to all concerned with Sound Broadcasting

STUDIO ENGINEERING FOR SOUND BROADCASTING

By Members of B.B.C. Engineering Division: General Editor J. W. Godfrey

Compiled for the training of B.B.C. staff in the principles underlying operational procedures at studio centres, this book will be valuable to broadcasting staffs throughout the world on both the engineering and non-engineering sides. Although the information mainly relates to B.B.C. equipment and procedures, most of the text has a very general application in audio-frequency engineering. All six authors are members of the B.B.C. Engineering Division, and each is a specialist in his field; no effort has been spared to ensure technical accuracy, combined with clear and straightforward presentation. The technical level is practical rather than academic and should present no difficulty to the readers for whom the work is intended.

Published for "Wireless World"

Obtainable from booksellers or direct from:

Iliffe & Sons Limited, Dorset House, Stamford Street, London, S.E.1

Contents

Development of the Broadcasting Chain
Transmission Quantities
Acoustics and Microphone Placing
Amplifier Equipment
Broadcast Programme Sources
The Control Room
Programme Circuits on Post Office Lines
Monitoring
The B.B.C. Communication System

Get your copy NOW

8¾″ × 5½″ 240pp. illustrated

25s. net.

By Post 25s. 8d.

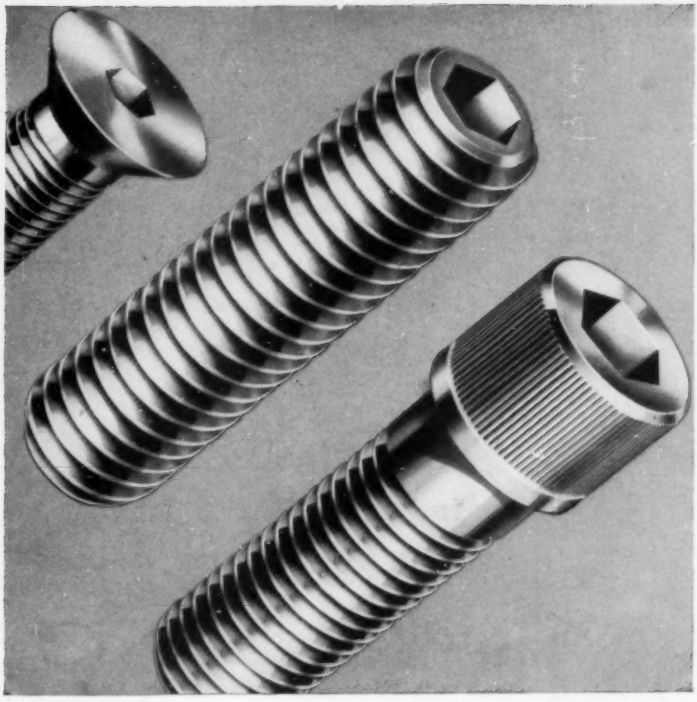

UNBRAKO SCREWS COST LESS THAN TROUBLE

UNBRAKO

Unbrako Screws make a better job of it . . .

Where top-quality counts, Unbrako socket screws score every time. These tremendously tough, high-tensile socket screws, rigidly controlled at every stage of manufacture, are made to hairline-tolerance engineering standards, by the best equipped specialist screw organisation in Europe. Their superior strength usually means that when you specify Unbrako, you can use a smaller number of screws to take the same stress. They help to speed production too. There are Unbrako stockists all over the world.

UNBRAKO SOCKET SCREW CO. LTD. · COVENTRY

LINKED IN LEADERSHIP..

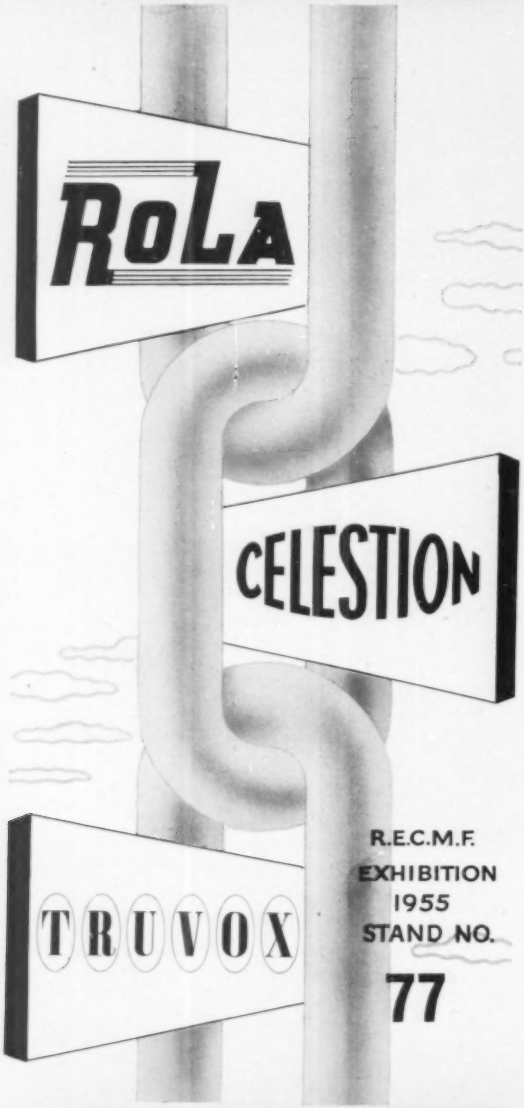

Rola Celestion Ltd.

FERRY WORKS THAMES DITTON, SURREY Telephone: EMBerbrook 3402

'Of course, all this will be in rubber . . .

For over a century when a problem like that has arisen, men responsible for production planning and buying have thought at once of P. B. Cow. Knowing the vast resources of the P. B. Cow organisation were always at their service.

Today, we are proud to offer an *unparalleled service to every industry.* A large team of experts, experienced in the latest and most up-to-date methods of production, is available to solve *your* problem. Experts who will bring to the job all the knowledge acquired in advising and supplying leading companies the world over.

So whenever you have a problem that concerns rubber, write or phone for one of our technicians to call. He will be fully qualified to help and advise you.

P. B. COW SERVE

Agriculture
Dairy
Motor Car
Radio
Television
Shipbuilding
Public Utilities
General Engineering
Pharmaceutical

WE SPECIALISE IN:

Production of Rubber to Metal bonded parts, Anti-vibration and Resilient Mountings, Oil Seals, Handmade Fabricated Parts, Proofed Fabrics in Natural or Synthetic Rubbers for every purpose, and Air Buoyancy work of all descriptions.

. . . get in touch with P. B. COW

RUBBER THAT IS RUBBER

P. B. Cow & Company Ltd., Rubber Manufactu ing Specialists for every Industry. Industrial Division: 470 Streatham High Road, London, S.W.16.
Phone: Pollards 4481.

PBC

The most successful amplifier design of the year...The Osram **'nine - one - two'**

High Quality Amplifier and Reproducer

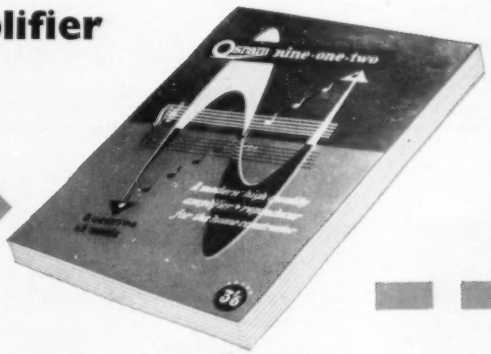

Hailed with enthusiasm by home constructors and music lovers throughout the country. Designed to do full justice to the best of modern L.P. recordings, the Osram '912' sets a startlingly new standard of realism in domestic sound reproduction. The versatile tone control system with its variable treble slope also enables old and worn, but often treasured, records to be played with the maximum of musical enjoyment.

How to build the Osram '912'

Osram '912', 9 octaves, 12 watts, ultra-linear output stage, base and treble tone controls, variable treble slope, stage-by-stage wiring instructions.

PRICE **3/6**

From your dealer or by post 3d. extra from Osram Valve and Electronics Department.

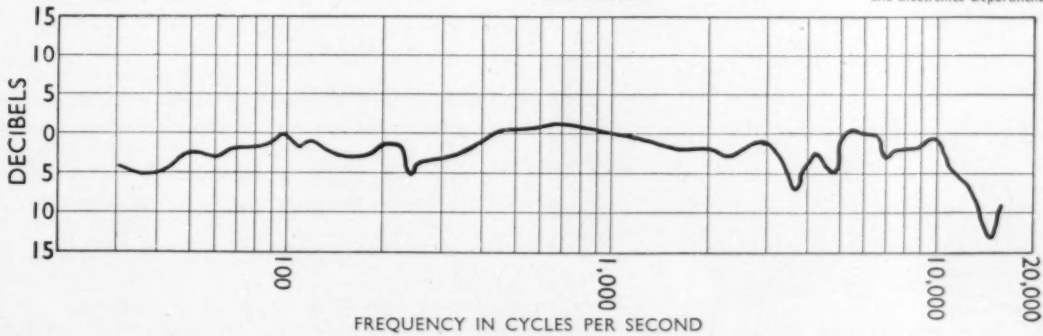

Overall frequency response of the complete equipment, comprising L.P. record, specified pick-up, Osram 912 amplifier and G.E.C. Metal Cone Loudspeaker in octagonal loaded-port cabinet.

THE GENERAL ELECTRIC CO. LTD., MAGNET HOUSE, KINGSWAY, LONDON, W.C.2

McMURDO VOLTAGE SELECTORS

Two types of voltage selector panels for mains voltage adjustment. Both types have three-pin plugs which connect pairs of contacts to one common contact for the simultaneous adjustment of two transformers or circuits in parallel.

4-WAY



BVS/4 Moulded in P.F. Escutcheon is Black SRBP Sheet with "standard" voltage range engraving as follows:—

200 210 220 230

210 220 230 240

Non-standard marking is available to special order.

6-WAY

XVS/6 Moulded in Nylon P.F.
No "standard" marking. Engraved according to requirements. Please specify required marking on order.



THE McMURDO INSTRUMENT COMPANY LTD.

Victoria Works, Ashtead, Surrey. Tel: Ashtead (Surrey) 3401

ESC decade delay lines

— are laboratory equipment

— laboratory precision is their hallmark

For all pulse systems, ESC Decade Delay Lines meet the most vigorous specifications.

ESC decade-delay networks have been prepared for laboratory use, conforming with the latest requirements of advanced computer and radar development work. The units are true decade-delay lines and not tapped systems, and thus, may be used at other impedance levels by proper matching. Termination is therefore not provided within the unit but is easily arranged at the input and output terminals.

All models have a nominal characteristic impedance of 1000 ohms and delay calibration is made to ±1%. The voltage rating is 500 d-c wv. Any specifications will be modified to suit special requirements upon request.

The ESC decade-delay line is supplied in a finished mahogany cabinet or for rack mounting.

Write for Complete Details

ESC CORPORATION

534 Bergen Blvd., Palisades Park, New Jersey

Marconi Complete TELEVISION SYSTEMS from Camera to Aerial

Both for studio and outside broadcasting of television programmes Marconi equipment is required at every stage of production and transmission. Cameras, Picture and Waveform Monitors, Vision Mixers, Telecine Equipment where film sequences are included, Microwave Links, Transmitters and Aerial must all be matched as components of a completely integrated system with a designed performance. The long experience and advanced technical knowledge of the Company's Broadcasting Division are at the disposal of all who are responsible for television, throughout the world.

Shown above is the Marconi Mk. III Camera for 4½″ or 3″ image orthicon tube. It combines technical excellence with optimum operating facilities. On the right is a typical Marconi Television Aerial array.

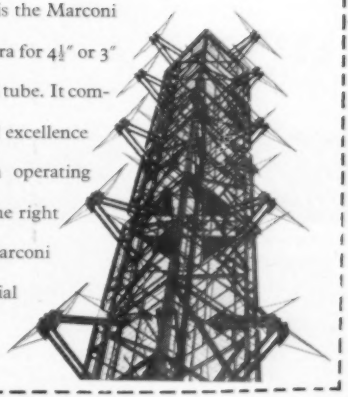

Marconi Television Equipment is installed in every one of the B.B.C.'s Television stations and has been supplied to countries in North and South America, Europe and Asia. Compatible colour television was first demonstrated in Britain by Marconi's.

Lifeline of communication

MARCONI

Complete Broadcasting and Television Systems

MARCONI'S WIRELESS TELEGRAPH CO. LTD., CHELMSFORD, ESSEX

Partners in progress with the **'ENGLISH ELECTRIC'** *Company Limited*

LB 5

AIRMEC

MILLIVOLTMETER *Type 784*

(Wideband Amplifier and Oscilloscope Pre-Amplifier)

THIS instrument consists essentially of a high-impedance probe unit followed by a stable wide-band amplifier and diode voltmeter. Measurements may be made from 1 millivolt to 1 volt in the frequency range 30 c/s to 10 Mc/s. The provision of a low impedance output enables the instrument to be used as a general purpose amplifier in the frequency range 30 c/s to 15 Mc/s, or as an extremely sensitive pre-amplifier for the Airmec Oscilloscope Type 723.

- **Frequency range from 30 c/s to 10 Mc/s.**
- **Voltage ranges 0-10, 0-100, 0-1000 millivolts.**
- **Excellent stability.**
- **Can be used as an amplifier up to 15 Mc/s.**
- **Immediate delivery.**

Full details of this or any other Airmec instrument will be forwarded gladly upon request

AIRMEC LIMITED — HIGH WYCOMBE BUCKINGHAMSHIRE ENGLAND

Telephone: High Wycombe 2060 *Cables:* Airmec, High Wycombe

Excellence in design...

Specialists in Sub-miniature Telecommunication Components

STAND OFF INSULATOR

For 1,500 volt working
Overall height 1·1″
Over chassis ·86″
Silver plated spill ·35″
6BA hexagon stud, chromium plated

These are reproduced (approx) actual size

MINITRIMMER



Standard maximum capacities up to 13pF. Voltage 500 D.C. Base $\frac{3}{8}$″ square with fixing centres for 10BA $\frac{1}{4}$″ apart

Details from:—

OXLEY
DEVELOPMENTS CO. LTD.
ULVERSTON NORTH LANCS *Tel:* Ulverston 3306

Quartz Crystals of any shape and size cut and ground precisely to specification and coated, if required, with Gold, Silver, Aluminium or Rhodium, etc.

BROOKES

Brookes Crystals Ltd.

Suppliers to Ministry of Supply, Home Office, B.B.C., etc.
181/3 TRAFALGAR ROAD, LONDON, S.E.10
Phone: GREenwich 1828 *Grams:* Xtals, Green, London

VISUAL VALVE TESTER

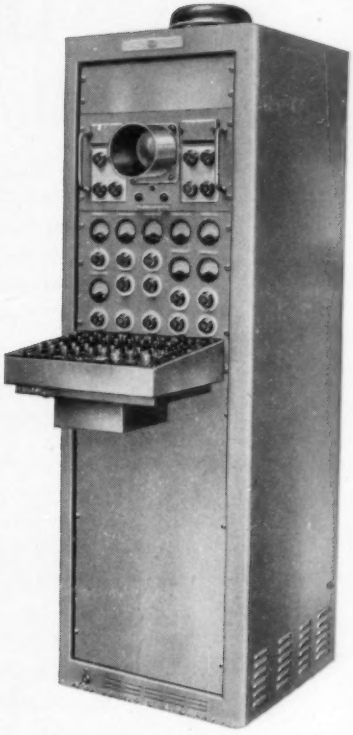

This equipment displays on a cathode-ray tube a family of Ia/Vg curves for any receiving type thermionic valve. Eleven curves corresponding to eleven different grid voltages are presented simultaneously and a calibrated graticule permits rapid comparison with published data.

Nine standard valve bases are provided, with facilities for connecting others, and the various valve electrodes are connected to the requisite supplies by a multi-button switching board.

This permits any electrode to be connected to any supply without damage and also enables electrodes to be paralleled for test purposes.

All external parameters Va, Vs, Vh, Vg, are continuously variable over a wide range and current and voltage values are metered.
Full technical data is available on request.

CINEMA TELEVISION LTD

A COMPANY WITHIN THE J. ARTHUR RANK ORGANISATION

WORSLEY BRIDGE ROAD • LONDON • S.E.26
HITHER GREEN 4600

SALES AND SERVICING AGENTS:
Hawnt & Co. Ltd., 59 Moor St. Birmingham, 4
Atkins, Robertson & Whiteford Ltd., 100 Torrisdale Street, Glasgow, S.2
F. C. Robinson & Partners Ltd., 122 Seymour Grove, Old Trafford, Manchester, 16

A valuable book for Electrical and Electronics Engineers

LAPLACE TRANSFORMS FOR ELECTRICAL ENGINEERS

By B. J. Starkey, Dipl. Ing., A.M.I.E.E. A presentation of the theory of Laplace transformation in which a physical vocabulary rather than a purely mathematical one is used as far as possible. This method of analysis has become of increasing importance to electrical engineers in many fields, and the work is designed to provide a thorough treatment of the subject in a language with which they will be familiar. *Published for "Wireless Engineer."*

$8\frac{3}{4} \times 5\frac{1}{2}$ 280 pp. **30s. net.** BY POST 30s. 8d.

From booksellers or direct from Iliffe & Sons Ltd., Dorset House, Stamford St., London, S.E.1

ELCOM ELECTRONIC COMPONENTS

TYPE 200 MINIATURE ATTENUATOR OR FADER—A NEW ADDITION TO THE "ELCOM" RANGE.
Can be supplied also as a Stud Switch (Single or Double Pole)

VITREOUS & LACQUERED MINIATURE WIRE WOUND RESISTORS.
A range of resistors to tolerances of ± 1%, 2% and 5% over an ohmic range of 1 ohm to 200 K ohms at ratings from ¾ watt to 25 watts.

PLUGS AND SOCKETS A full range of interchangeable units 2, 4, 6, 8, 12, 18, 24 and 33 way. Rated 5 amps per contact and 1000 volts working, withdrawal pressure 1¼ lbs. per contact. Supplied with positive locking device.

ELECTRONIC COMPONENTS, WEEDON ROAD INDUSTRIAL ESTATE, NORTHAMPTON
Telephone : Northampton 2467 Cables : Elcom Northampton
(REQUEST DATA SHEETS E/WE.1/2/3)

WIDE RANGE VOLTMETER type 2405

A high-gain, high-stability valve voltmeter, covering the frequency range

20 c/s - 10 Mc/s.

Supplied complete with measuring probe with cathode follower, and capacitative pre-attenuator of 60db., the Voltmeter has an accuracy of ± 0.2db. over the frequency range 50 c/s - 3Mc/s, and ± 1db outside these limits.

See this and other Brüel & Kjær instruments at the INTERNATIONAL INSTRUMENTS SHOW — Union Street — 25th April to 6th May.

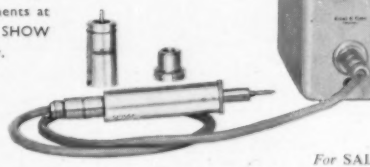

Having a large illuminated logarithmic scale, the instrument gives full scale deflection for 3-30-300mV, and is perfectly protected against overloads. When used with the attenuator, the voltage ranges are extended to 3-30-300V.

For SALES AND SERVICE *in United Kingdom, please write to*

ROCKE INTERNATIONAL LTD.

59 Union Street, London, S. E. 1

Tel.: HOP 4567

B K

Brüel & Kjær

Adr. Nærum, Denmark . Telephone: Nærum 500 . Cable: Brukja, Copenhagen

APPOINTMENTS—The engagement of persons answering these advertisements must be made through the local office of the Ministry of Labour and National Service, etc., if the applicant is a man aged 18-64 or a woman 18-59 inclusive, unless he or she or the employer is excepted from the provisions of The Notification of Vacancies Order, 1952.

TECHNICAL BOOKS

A large selection of books on Radio and Electronics and all branches of Electrical Engineering always in stock. Catalogues available. Please state interests.

SCIENTIFIC AND TECHNICAL LENDING LIBRARY

Annual Subscription from TWENTY-FIVE SHILLINGS

H. K. LEWIS & Co. Ltd.

136 Gower Street, London, W.C.1

Telephone : EUSton 4282 (7 lines)

Business hours :—9 a.m. to 5.30 p.m. *Saturdays to 1 p.m.*

Wireless Station Superintendent required for the **Posts and Telecommunications Department, Gold Coast Local Civil Service,** for two tours of 18 to 24 months in the first instance. Consolidated salary scale £990 rising to £1,230 a year. Gratuity at the rate of £100/£150 a year. Outfit allowance £60. Liberal leave on full salary. Free passages. Candidates should possess C. and Gds. Final Certificate in Telecommunications (Radio) or C. and Gds. Certificates Radio III and IV equivalent, and have had three years' experience in two or more of the following fields: V.H.F. link systems; H.F. communications systems; Frequency shift keying and teleprinter maintenance; V.H.F. and H.F. Cathode Ray Direction finding system; aeronautical navigation aids (ground); manufacture of light engineering equipment. Candidates from the British Post Office should apply through departmental channels. Write to the Crown Agents, 4 Millbank, London, S.W.1. State age, name in block letters, full qualifications and experience and quote M2C/29100/WJ.

Australia Calls



TELECOMMUNICATION ENGINEERS

REVISED SALARY SCALE Grade I Engineer-£890 to £1310 (In £A)
Group Engineer-£1394 to £1564

AUSTRALIA is developing rapidly an urgently needs professionally qualified electrical, mechanical and civil engineers to assist in the expansion and maintenance of its national telephone, telegraph, radio and television services.

QUALIFICATIONS: Engineers academically qualified for membership of main Institutions of Engineers.

STARTING SALARIES: According to qualifications and experience. Graduates £932 to £1058.

CONDITIONS OF APPOINTMENT: Permanent appointment to the Postmaster-General's Department. Free passages for appointee and dependants. Initial accommodation provided. In approved circumstances, special settling-in allowances. Full salary from date of embarkation. Superannuation, annual and sick leave conditions. Good opportunity for advancement.

FOR FURTHER DETAILS: Engineers qualified or about to qualify, enquire from the Australian Post Office Representative, Australia House, Strand, London, W.C.2.

ELECTRONIC ENGINEERS are required by the **ENGLISH ELECTRIC CO. LTD.**, to fill vacancies in the Company's Laboratories at **LUTON** and **STEVENAGE.**

1.—**SENIOR MICROWAVE ENGINEER**—applicant should have a good theoretical background to degree standard and experience of design or engineering of microwave equipment. The work includes investigation of new methods of construction with a view to miniaturization and weight reduction.

2.—**SENIOR ENGINEER**—to lead a group of engineers in the development of specialized electronic test gear.

3.—**SENIOR ENGINEER**—for work on general circuit development, with sound fundamental knowledge of electronics and the ability to apply it.

4.—**SENIOR INSTRUMENTATION ENGINEERS**—with a degree or H.N.C. and experience of the design of equipment for use in the instrumentation field.

5.—**SENIOR ENGINEER**—to lead a group conc rned with development and field trials of ground radar. Previous experience essential.

6.—**SENIOR RADAR AND ELECTRONIC ENGINEERS**—for development and field and flight experiments of radar equipment. Degree or H.N.C. standard preferred but applicants without these qualifications but with wide experience of this work considered.

7.—**SENIOR ENGINEER**—for missile telemetry installation planning. Applicants must be familiar with existing telemetry systems and measuring techniques, suitable to a man with trial experience.

8.—**JUNIOR ENGINEERS AND LABORATORY ASSISTANTS**—are required to assist in the above work. Vacancies also exist for junior staff with experience of, or an interest in Microwaves.

Housing assistance may be given in some cases.

All of the above posts are permanent and progressive and pensionable after qualifying period, attractive salaries are offered to the successful applicants. Applications should be sent to Dept. C.P.S., 336/7 Strand, London, W.C.2, quoting ref. no. 1260B.

HER MAJESTY'S OVERSEA CIVIL SERVICE

Engineers, Posts and Telegraphs Department, Federal Government of Nigeria

Duties include (a) the supervision of African and European staff, installing and maintaining several types of wireless equipment, particularly V.H.F. single and multi-channel, or (b) the supervision of staff and the installation and maintenance of manual telephone exchanges; the planning installation and maintenance of associated subscribers' networks, and the maintenance of carrier equipment and telegraphs used on physical or V.H.F. Radio Circuits, or (c) the carrying through of telephone subscriber underground cable development schemes including the balancing of loaded cables and telecommunications duties of a general nature if necessary.

Appointment is either pensionable on probation in the salary range £910-£1,560 per annum gross or on contract in the salary range £1,116-£1,898 per annum gross with a gratuity of £150 per annum on satisfactory completion of contract. Free first-class passages are provided for the officer, his wife, and assistance of up to £75 each for a maximum of two children is granted in respect of their passages or maintenance in the United Kingdom. Leave is granted at the rate of seven days for each month of resident service in tour of 18-24 months and government quarters are provided, if available, at low rental.

Candidates, between 25 and 35 years of age, must have passed, or be exempt from Parts A and B of the examination for A.M.I.E.E. or hold a University Degree in Electrical Engineering (preferably telecommunications) or be Assistant Engineers in the British Post Office with considerable experience in modern telecommunications practice. Preference given to candidates with experience in the installation and maintenance of V.H.F. multi-channel equipment.

Apply in writing to the Director of Recruitment, Colonial Office, Great Smith Street, London, S.W.1, giving briefly age, qualifications and experience. Mention the reference number BCD 108/14/05.

EXPERIENCED RADIO TESTERS AND INSPECTORS

Required for production of communication and radio apparatus. Also instrument makers, wirers and assemblers for factory test apparatus. Apply Personnel Manager, E. K. Cole, Ltd., Ekco Works, Malmesbury, Wilts.

Works or Maintenance Engineers required for factory in Sunderland. Must have had experience in installation and operation of factory services, including heating, ventilation, water, gas and electricity supply; maintenance of machine tools and appliances used for light mass production work, and drawing office experience in mechanical design. Ability to control office and works staff is necessary. Salary £750/£900 per annum. Apply Personnel Superintendent, The Edison Swan Electric Co. Ltd., Cosmos Works, Brimsdown, Enfield, Middlesex.

Production Planning Engineer required for factory in Enfield. Should have had experience preferably but not essentially in electronic valve production. Must be able to break down programmes into component part requirements and raw materials, and organize supplies. Also must be able to assess plant capacities and organize loading in economic quantities. Knowledge of ratefixing and incentive schemes essential. Salary £900/£1,000 per annum. Apply Personnel Superintendent, The Edison Swan Electric Co. Ltd., Cosmos Works, Brimsdown, Enfield, Middlesex.

Electrical Engineers or **Physicists** who have qualified with a University Degree or Higher National Certificate are required for the investigation of radio interference over a wide and interesting range of interfering sources. Applicants should write to the Director of Research, The British Thomson-Houston Co. Ltd., Rugby, giving their age and qualifications, quoting the reference HI.

Engineer with electrical or physicist degree required for development work on testing equipment for telecommunication cables. Permanent and pensionable position at salary commensurate with experience and qualifications. Please apply giving full particulars to Personnel Officer, Southern United Telephone Cables Ltd., Dagenham Dock, Essex.

Engineers 25-30 required for electronic and mechanical work by The Plessey Company Limited at Ilford. Good prospects of promotion, interesting work, and a pension scheme await suitably qualified graduates or holders of H.N.C. Apply with full details of past experience to The Plessey Company Limited, Vicarage Lane, Ilford, Essex.

RESEARCH ENGINEERS, preferably of degree standard, and with a sound knowledge of communications and, particularly, electronics, required for experimental work relating to underwater sound apparatus.

Applications giving past experience, technical qualifications, age and salary required, should be addressed to the Personnel Manager, Kelvin & Hughes Ltd., New North Road, Barkingside, Ilford, Essex.

Belling & Lee Ltd. wish to engage a young graduate **Electronics Engineer** with experience of V.H.F. receiver layout and circuit design, the work being in connection with the development of measurement apparatus for their television aerial laboratory, and communal broadcast and television amplifiers; British nationality essential; contributory pension scheme. Applications (which will be treated in confidence) stating age, experience and salary required to the Secretary, Great Cambridge Road, Enfield, Middlesex.

TRINITY HOUSE, LONDON

Radio Maintenance Assistants are required to maintain radio and radar equipment in shore stations and ships.

Candidates must possess a knowledge of the fundamental principles of radio and radar and must have had practical experience in the maintenance and use of such equipment. They should be medically fit and of British nationality.

Some of the appointments are permanent and pensionable subject to one year's probation. Salary scales £565 rising to £695 (Minimum linked to age 26) or £452 10s. rising to £610 (Minimum linked to age 25) depending on qualifications and experience.

Applications to be made in writing to The Secretary, Trinity House, London, E.C.3, not later than 18th April, 1955, stating age, present occupation, qualifications, experience and enclosing copies of testimonials.

PYE LIMITED, CAMBRIDGE

Vacancies exist in the Engineering and Research Laboratories of the above progressive organization for **Senior** and **Junior Engineers** and **Drawing Office Personnel** to work in each of the following fields:—

(1) T/V transmitters, aerials and ancillary equipment.
(2) T/V studio and waveform equipment.
(3) Radio and T/V broadcast receivers.
(4) Microwave equipment.
(5) Applications of transistors and other semiconductor devices.
(6) Transformer design.
(7) Precision electro-mechanical devices.
(8) Electrical servo-mechanisms and control systems.

There are also vacancies for men qualified as **Radio Mechanics** for installation and maintenance work.

Salaries will be on a generous scale and in accordance with qualifications and experience. Basic 40-hour week, paid overtime, profit-sharing scheme, pension scheme, canteen, sports club, benevolent fund.

Please write, indicating which of the above fields interests you and giving brief details of your attainments to date, to the Chief Engineer, Pye Limited, Cambridge. Correspondence will be treated in strict confidence.

MINISTRY OF SUPPLY requires **Technical Authors** at Chessington (also for posts (b) at Farnborough and Malvern), for publications dealing with all aspects of (a) mechanical and electro-mechanical equipment related to guided weapons *or* telegraphy, tele-mechanics and radio (Ref. D87/5A); (b) airborne/ground electronic equipment relating to radio communications, radio/radar control, search and navigation *or* guided weapons (Ref. D88/5A); (c) aircraft instruments, training aids and photographic equipment (Ref. D89/5A); (d) aircraft electrical, instrument and radio installations *or* ground servicing and test equipment (Ref. D90/5A). *Qualifications:* British of British parents. Recognized engineering apprenticeship or equivalent with A.M.I.C.E. or Mech.E. or E.E. or A.F.R.Ae.S. or H.N.C. or O.N.C. or equivalent. *Experience:* Posts (a) development or operation and maintenance of equipment concerned, and for guided weapons knowledge of servo-mechanisms and electronic devices desirable; Posts (b) development or operation and maintenance of radio equipment; Posts (c) electrical and mechanical instruments particularly for aircraft, apprenticeship in instrument making preferred; Posts (d) appropriate experience. Except for (c) experience of writing or editing technical publications advantageous. Vacancies in three grades at salaries between £645 and £1,015, according to age and qualifications. Not established, but opportunities to compete for establishment may arise.

Application forms from M.L.N.S., Technical and Scientific Register (K), 26 King Street, London, S.W.1, quoting appropriate reference.

Ambitious and energetic engineers are invited to apply for the following posts:—

1. Senior position for a competent **Valve Engineer** to study and advise on the use and application of valves in a wide range of electronic equipments and to liaise with valve manufacturers. Applicants must have experience suitable for the position and a sound knowledge of microwave valves.

2. **Senior Microwave Engineer** for development of microwave components and aerials. Qualifications and experience essential.

3. **Senior Engineers** capable of controlling a project from "breadboard" to production. Applicants must have at least three years' development experience.

These posts are for permanent pensionable staff in a rapidly expanding Development Division offering unique opportunities for advancement to those who are prepared to work hard and produce results. Write to: Chief Development Engineer, Decca Radar Ltd., 9 Davis Road, Tolworth, Surrey.

The Edison Swan Electric Co., Ltd., Cosmos Works, Brimsdown, Enfield, Middlesex, has vacancies in its Research and Development Laboratories for:—

1. **Circuit Development** and **Application Engineers** for colour television investigations.

2. **Circuit Development** and **Application Engineers** for black and white television development work.

3. **Engineers** for development work on television and F.M. amplifier problems. Previous experience in V.H.F. or F.M. required.

4. **Cathode-Ray Tube Development Engineers** for development work on colour and black and white tubes. Previous experience on cathode-ray tube development or design required.

5. **Application Engineers** for work in connection with customer problems on television, radio and F.M.

6. **Engineer** for design of test equipment for colour, black and white television and allied development work.

7. **Engineers** for circuit development and application work on transistors.

The above applicants should have a good Engineering or Physics degree or equivalent, but vacancies also exist for candidates with H.N.C. or equivalent qualifications.

The vacancies are a result of a large expansion in the Company's activities.

Good salaries will be paid to suitable applicants and the positions are progressive and carry the advantages of a Pension Scheme.

The starting salary will depend on the qualifications, experience and age of the applicants.

Applications in writing, which will be treated with the strictest confidence, should be sent to the Personnel Superintendent.

Visit our STAND D.130 B.I.F. Birmingham

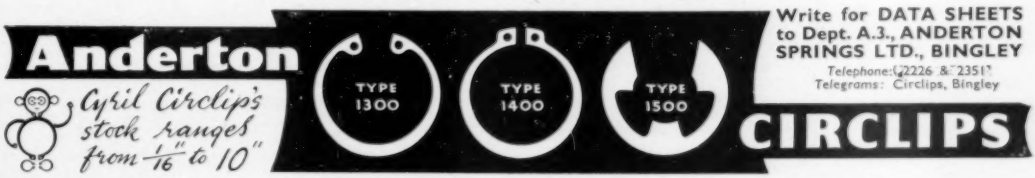

The Edison Swan Electric Co., Ltd., Cosmos Works, Brimsdown, Enfield, Middlesex, has vacancies in its Research and Development Departments for:—

1. **Development Engineers** for work on design and development of thermionic valves.
2. **Technical Assistants** for work in connection with design and development of thermionic valves.
3. **Mechanical Engineers** interested in the problems of mass production associated with thermionic valves.

These vacancies are the result of a rapid expansion in the Company's activities. The positions are progressive and carry the advantages of a Pension Scheme.

Applicants for vacancies (1) should have an Engineering or Physics degree, but applications from candidates with H.N.C. or equivalent will be considered.

Applicants for vacancies (2) and (3) should have Ordinary N.C. or H.N.C. or Inter B.Sc. or equivalent.

The starting salary will be in accordance with the qualifications, experience and age of the applicants.

Applications should be in writing and will be treated with the strictest confidence.

Apply to the Personnel Superintendent.

ELLIOTT BROS. (LONDON) LIMITED

have vacancies for **Senior** and **Junior Electronic Engineers** in their expanding activities in the fields of industrial control, measurements and instrumentation.

SENIOR ENGINEERS with good academic background and experience in this or similar fields. There is one vacancy for a Chief Engineer to take charge of a Division and several vacancies for leaders of development teams. Ref. E.T.1.

JUNIOR ENGINEERS with University degree and 2–3 years' practical experience to work under the guidance of seniors in development teams. Ref. E.T.2.

LABORATORY ASSISTANTS with H.N.C. or equivalent and with interest to further their education and experience and train as development engineers. Ref. E.T.3.

Applications for the above positions with full details of age, qualifications and experience and quoting the appropriate reference number, to Personnel Officer, Century Works, Lewisham, London, S.E.13.

THE WORLD'S GREATEST BOOKSHOP

FOYLES

• FOR BOOKS •

New and secondhand Books on every subject. Large Technical dept. Stock of over three million volumes.

119-125 CHARING CROSS ROAD, LONDON, W.C.2

Gerrard 5660 (16 lines) ★ *Open 9—6 (inc. Sat.)*

Technical Instructor (Broadcasting) required by the **Broadcasting Service, Nigerian Federal Government**, for two tours of 12 to 15 months each, with possibility of permanency. Salary scale (including expatriation pay) £1,307 rising to £1,453 a year plus **gratuity** at rate of £150 a year. Outfit allowance of £60. Liberal leave on full salary. Free passages for officer and wife. Assistance towards cost of children's passages or grant up to £150 annually for maintenance in U.K.

Candidates should have instructional experience and should have a good theoretical and practical knowledge of radio communication as applied to M.F., H.F. and V.H.F. transmitters and receivers, with a knowledge of mathematics, electricity and magnetism.

Write to the Crown Agents, 4 Millbank, London, S.W.1. State age, name in block letters, full qualifications and experience and quote M2C/30513/WJ.

Project Engineers are required to take charge of Microwave Electronic and Mechanical developments in connection with guided weapon and other applications in a company near London. Candidates should be graduates or hold H.N.C. and be between the ages of 30 and 40. Salaries range from £1,000 upwards according to age and experience. Pension scheme in operation. Full particulars of experience should be addressed in confidence to Box No. 2371, c/o *Wireless Engineer*.

Development and Production of Industrial and Trade Moulding by Injection and Compression techniques. Specialists in P.V.C. mouldings, and work incorporating metal inserts for the Aircraft, Electrical and Electronic Industries.

BRITISH PLASTICS DEVELOPMENTS *Ltd.*

PARKGATE · NEWDIGATE · SURREY

TELEPHONE NEWDIGATE 269

Index to Advertisers

	PAGE
Aero Research, Ltd.	14
Airmec, Ltd.	28
Anderton Springs, Ltd.	33
Appointments Vacant	31, 32, 33, 34
Automatic Coil Winder & Electrical Equipment Co., Ltd., The	Cover ii
Belling & Lee, Ltd.	21
British Insulated Callender's Cables, Ltd.	6
British Physical Laboratories	22
British Plastics Developments, Ltd.	34
Brookes Crystals, Ltd.	28
Brüel & Kjær	31
Cinema Television, Ltd.	29
Cow, P. B. & Co., Ltd.	24
Edison Swan Electric Co., Ltd.	19
Electro-Methods, Ltd.	7
Electronic Components, Ltd.	30
English Electric Valve Co., Ltd.	9
E.S. Corporation	26
Ferranti, Ltd.	4, 11
Foyle, W. & G., Ltd.	34
General Electric Co., Ltd., The	25
Iliffe Books	22, 30
Lewis, H. K. & Co., Ltd.	31
London Electrical Mfg. Co., Ltd.	5
Lyons, Claude, Ltd.	1
Marconi Instruments, Ltd.	10
Marconi's Wireless Telegraph Co., Ltd.	27
McMurdo Instrument Co., Ltd.	26
Muirhead & Co., Ltd.	20
Mullard, Ltd.	16, 18
Multicore Solders, Ltd.	Cover iv
Oxley Developments Co., Ltd.	28
Plessey Co., Ltd., The	13
Rola-Celestion, Ltd.	24
Rubber Bonders, Ltd.	8
Salford Electrical Instruments, Ltd.	12
Standard Telephones & Cables, Ltd.	3
Steatite & Porcelain Products, Ltd.	2
Telegraph Condenser Co., Ltd., The	Cover iii
Telephone Mfg. Co., Ltd.	20
Unbrako Socket Screw Co., Ltd.	23
Welwyn Laboratories, Ltd.	15

Printed in Great Britain for the Publishers, Iliffe & Sons, Ltd., Dorset House, Stamford Street, London S.E.1 by W. P. Griffith & Sons, Ltd., London and Bedford.

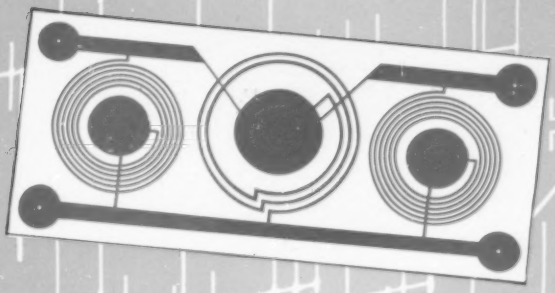



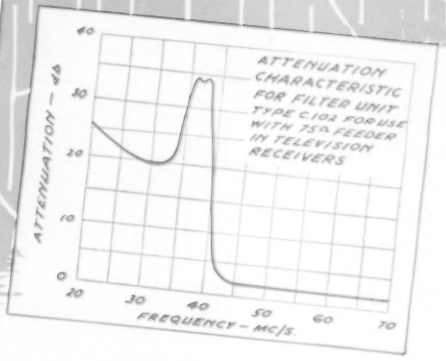

PRINTED CIRCUITS by TCC



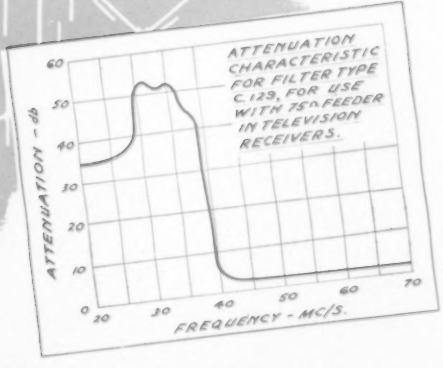

T.V. FILTERS

With Band III transmissions commencing soon, it is becoming common practice for designers to incorporate a high-pass filter in series with the aerial feeder to the Receiver. These filters are designed to give maximum attenuation (see curves) at around 34 to 37 mc/s. This is correct for 35 mc/s I.F. amplifiers, which are becoming standard for Band I and Band III receivers. By this means, interference in the form of 'patterning' is eliminated.

T.C.C. Engineers—with their wide experience in the development of Printed Circuits—have now produced a range of Filters low in cost, compact in size, uniform in performance and above all, completely stable. It is one more ingenious T.C.C. application of a technique destined to play a great part in the advancement of Electronics.

***Engineers and Manufacturers** interested in the various applications of Printed Circuits in the electronic industry are invited to register their names to receive our Technical Bulletins as issued. They should also apply for details of services available.*

THE TELEGRAPH CONDENSER CO. LTD.

SPECIAL PRODUCTS DIVISION · North Acton · London W3 · Tel: ACORN 0061

SEE WHAT WE'RE SAYING IN THE R.E.C.M.F. EXHIBITION CATALOGUE . . .

The World's Leading Manufacturers

OF TELEVISION, RADIO, TELEPHONE AND ELECTRONIC EQUIPMENT PREFER

Ersin Multicore

—THE WORLD'S FINEST CORED SOLDER

THE 7 LB. REEL FOR FACTORY USE
Prices on application

For over 16 years Ersin Multicore Solder has been the choice of manufacturers all over the world. Its 5 entirely separate cores of flux prevent breaks in the flux stream; there are no wasted lengths of solder without flux and the risk of making dry joints through insufficient flux is eliminated. Savings can often be made when using Ersin Multicore 5-core Solder as an alloy of lower tin content can often by used with complete efficiency.

ALLOYS AND GAUGES

Ersin Multicore Solder is supplied in all the usual Tin/Lead Alloys: 60/40, 50/50, 45/55, 40/60, 30/70, 20/80. Other alloys are supplied to special order. Standard gauges are as follows: 10, 12, 13, 14, 16, 18, 19, 20, 22, 24, 26, 28, 30, 32, and 34 s.w.g.

FLUXES

The A.I.D. approved type 362 flux, or even faster type 366 is incorporated in Ersin Multicore 5-core Solder. The following types of flux are also available: N flux containing Pentacol; 3E flux, the original Ersin Flux formulation which has been supplied for more than 16 years; R2 and R3 fluxes, Halide and Chloride free for modern production soldering processes calling for this type; L flux, suitable for high-speed machines and particularly lamp production; 2L flux which is the same as L type but with only 2.2% flux content.

SPECIAL HIGH AND LOW MELTING POINT SOLDERS

Ersin Multicore is available in the following special alloys, all containing 5-cores of Ersin Flux.

Type T.L.C. Melting Point 145° C.

Type L.M.P. Melting Point 179°C. Avoids 'pick-up' of silver when soldering ceramics.

P.T. Melting Point 232°C. When lead-free solder is required.

COMSOL. Melting Point 296°C. Extra high melting point soft solder with or without cores of flux.

Bib WIRE STRIPPER AND CUTTER

This handy tool strips insulation without nicking the wire, cuts wires cleanly and splits plastic extruded twin flex. Adjustable to most wire thicknesses by the turn of a screw. 3/6 each (subject).

LIQUID AND JELLY FLUX

Ersin Flux is supplied in liquid form for dipping purposes when it is not possible to use cored solder. A high viscosity red jelly is now also available for processes where a flux with greater properties of adherence is required. Ersin Jelly Flux is M.O.S. approved for specific soldering purposes.

SOLID SOLDER WIRE

Multicore Precision-made Solid Wire is supplied to special order in all gauges, for the comparatively few soldering processes where cored solder is unsuitable.

Bib RECORDING TAPE SPLICER

18/6 EACH
(Subject)



This Splicer, which incorporates many new detailed refinements, enables recording tape to be jointed easily and accurately so that no breaks or "clicks" in the recording are discernible.

If you have already bought an early model we will gladly modify it for you. Post it to us with stamps or P.O. value 2/- and do not forget to include your name and address.

PRINTED CIRCUITS

A complete soldering process has been developed by the Multicore Laboratories, including a protective coating which has been specially formulated for the tags of components to be solder dipped. Ask for Special Information Folder Ref. PC101.

We shall be pleased to see you on Stand 69 at the R.E.C.M.F. Exhibition to answer questions about the Multicore range or show you the latest additions. If you are unable to do so, but would like up-to-date information, please get in touch with our Technical Service Department, who are at your service to help in solving any soldering problems.

MULTICORE SOLDERS LTD., MULTICORE WORKS, HEMEL HEMPSTEAD, HERTS · (BOXMOOR 3636)

LATEST NEWS

Recent Multicore developments include the introduction of SAVBIT alloy which increases the life of soldering bits approximately 10 times.